

4000017568

P-5000

Telephone line relay unit



Onboard communication



- Autonomous Line Relay for 2 wire analog telephone lines (POT)

DESCRIPTION

P-5000 is a Telephone line relay unit for analogue POTS/FXS telephone lines. The relay unit has a self-contained power supply and double switch NO/NC Relay

- Self-contained power supply
- Relay max 5A
- Pulsed or Continuous operation (Jumper P2 configuration)

SPECIFICATIONS

GENERAL/ENVIRONMENT

Dimension (WxHxD)	130x148x52mm
Weight	0.3 kg
Material	PC/ABS blend, ABS
Color	RAL 9005 / 9006
Cable Entry	Top/Bottom
Access	Front
Mounting/Fixing	Wall / Inside 4x 3mm bolts
Glands	4xM20
-	-

Created: 29.09.2021, updated: 01.06.2022

page 1/3

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel - All rights reserved.

GENERAL/ENVIRONMENT


Environment	IP-56
Temperature	25°C to +55°C (Storage: -30°C to +70°C)
Humidity (max)	93% (at +40°C)
-	-
Compass Safe Distance	>5m

ELECTRICAL


Terminations	Screw terminals $\leq 1.5\text{mm}^2$
Power Supply	(Telephone Line self-contained)
Line Feed Voltage	24-64V DC
Ringing voltage	45-110 V, 18-25Hz
Relay Switching capacity	8A / 250VAC

CONNECTION ALTERNATIVES:

POWER CONTROL MODE:

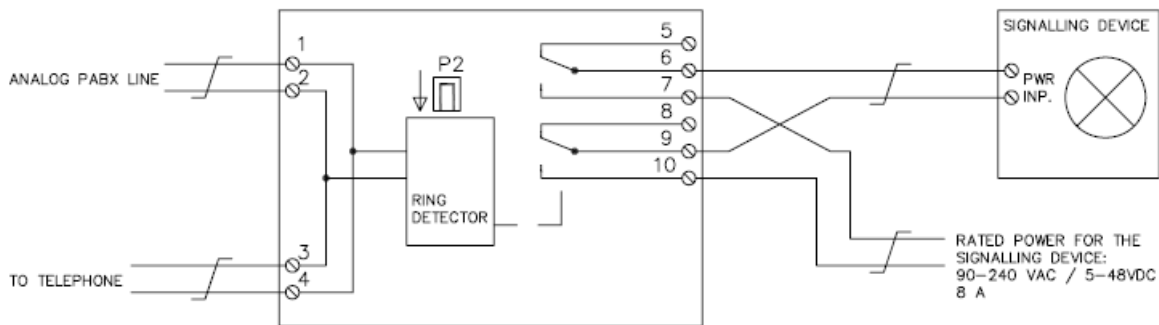

TRIGGER CONTROL MODE

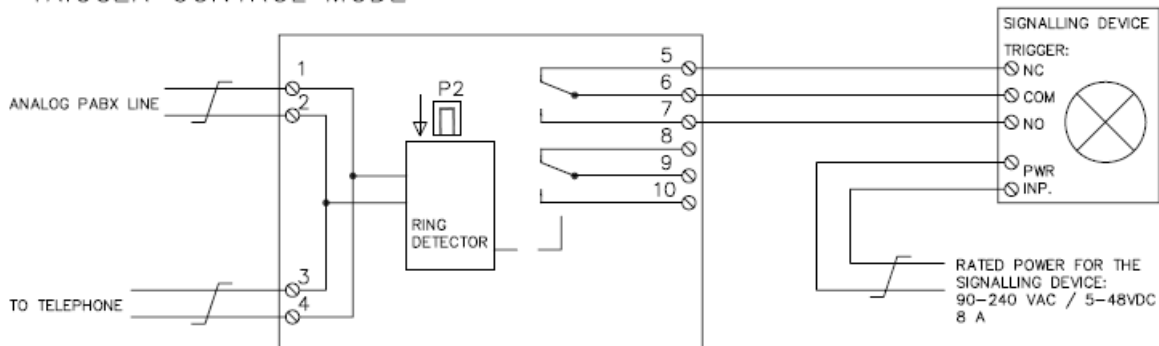

INSTALLATION AND OPERATION PRECAUTIONS:

- * THE RING RELAY BOARD MUST BE CONNECTED TO A LIVE TELEPHONE LINE FOR 1 MINUTE BEFORE FIRST OPERATION
- * THE RING RELAY CAN INITIALLY BE IN THE WRONG STATE AND MUST BE OPERATED ONCE BEFORE SECURE CORRECT OPERATION
- * RELAY ACTION:
P2 OFF = CONTINUOUS
P2 ON = PULSED
RELAY MAXIMUM LOAD = 8A

TECHNICAL DIMENSIONS

