

A-100AC

COMBINED AUDIO VISUAL SIGNAL UNIT



when communication is critical


FEATURES

- Audible signal device for all systems.
- Signal device do have the possibility for many different tones.
- To be wall-mounted in noisy areas like engine room etc.

SPECIFICATIONS



Operation voltage	220V AC
Sound pressure	100dB at 1M
Rated current	25mA
Sound options	32 programmable tones
Sound frequency	300 - 2900Hz
Volume control	- 16 dB (POT)
Operating temp	-25°C to +55°C
Humidity	0-90% at 50°C
Housing	Taxalan FR.ABS
IP-class	IP-56
Dimensions (mm)	114W x 87H x 77D
Weight	0.26 kg

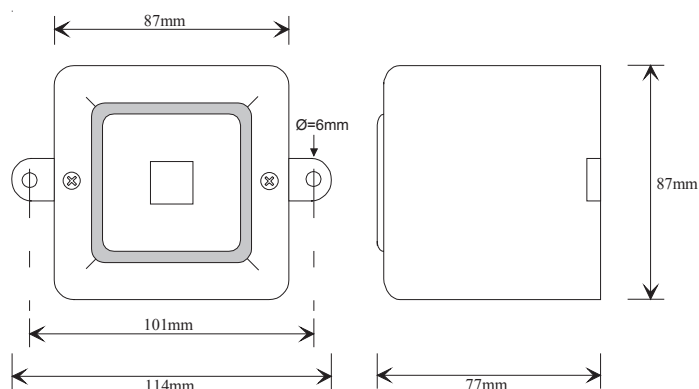

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
A-100AC	Electronic alarm horn 220V AC	0.26 kg

ORDER NUMBER
A-100AC

DOC NO
A100K10580

www.vingtor.com - sales@vingtor.com

