

CAU-4T

LOUDSPEAKER WALL MONT. WATERPROOF



when communication is **critical**

FEATURES

- Waterproof wall loudspeaker w/ transformer for use in galleys etc.
- With 100V line transformer
- Aluminium case

INSTALLATION, OPERATION AND MAINTENANCE PROCEDURES

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was assembled
- Fasten loudspeaker to wall by 1-3 screws on the bracket.
- To change the position of the loudspeaker, adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when in use
- Fasten lid with a torque of 2 - 3 Nm.




SPECIFICATIONS


Dimensions (mm)	128W x 237H x 100D
Weight	1.9 kg
Mounting	Bracket
Material / Color	Aluminium / RAL 7035
IP-rating	IP-55
Temperature range	Max. / min. amb. temp 90°C / -40°C
Max. / min. ambient temperature	90°C / -40°C
Cable entry	1x Gland M12 IP-68 for 2,5 - 6,5 mm cable diameter
Connections	Spring clamb
Rated / max. power	4W / 6W
SPL 1W/1m	85dB
SPL rated power	95dB
Effective freq.range	160 - 20000Hz
Dispersion	(-6dB)1kHz / 4kHz 140° / 100°

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
CAU-4T	Loudspeaker wall waterproof	1,9 kg

CAU-4T LOUDSPEAKER WALL WATERPROOF

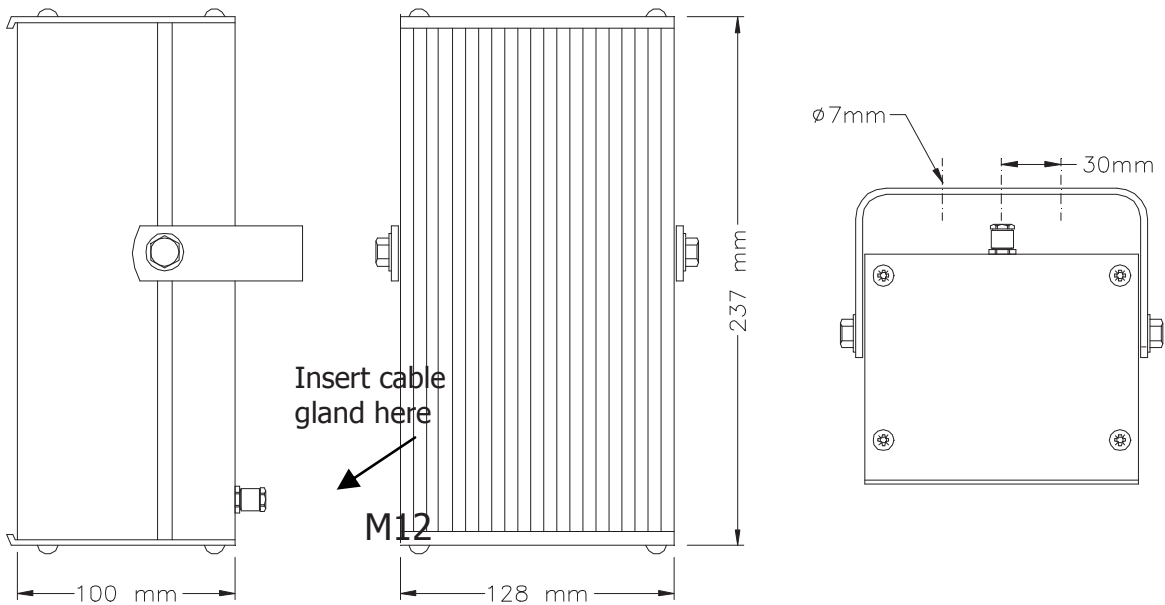

Sound pressure levels at different frequencies at 1W/1m pink noise.

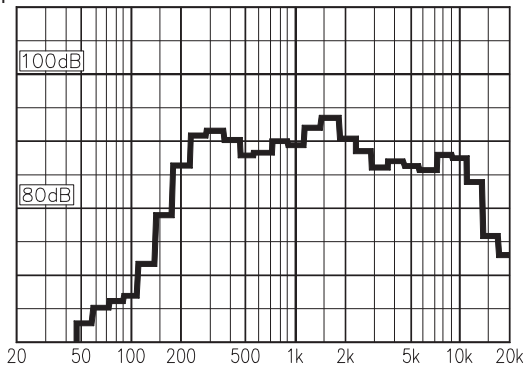

Secondary nominal tapping:

- 1 : 4 4,0 W
- 1 : 3 2,0 W
- 2 : 4 1,3 W
- 1 : 2 1,0 W
- 3 : 4 0,5 W
- 2 : 3 0,3 W