

IRR-3

RELAY BOX



when communication is critical


FEATURES

- Separate relay unit for operation of 24VDC or 220V AC visible and/or audible signal units.
- Wall mounting
- Suitable for installation in noisy areas


SPECIFICATIONS



Connections	Screw terminals
Material	Flame retardant blend plastic housing
IP class	IP-66
Dimensions (mm)	80W x 110H x 63D
Cable inlet	3x PG-11
Weight	0.35 kg

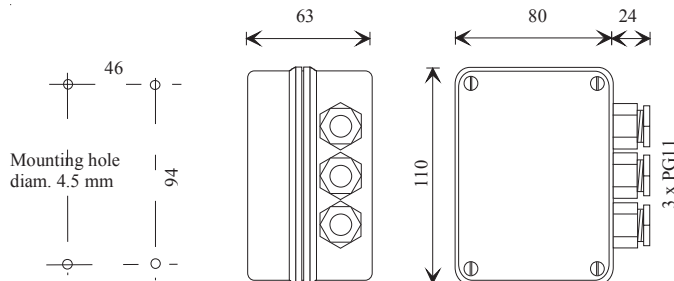

Terminal strip

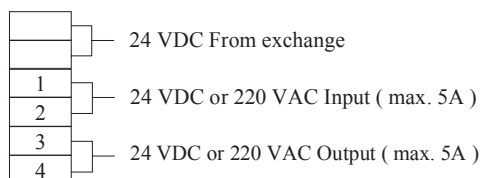

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
IRR-3	Relaybox 24V DC or 220V AC signal unit waterproof	0.35 kg

ORDER NUMBER
IRR-3

DOC NO
A100K10548

www.vingtor.com - sales@vingtor.com

