

VMP-530VHM

MAIN STATION IN WATERPROOF CABINET



when communication is **critical**

FEATURES

- VMP-530VHM consist of main station VMP-530, with a waterproof, noise-compensated, handheld microphone 62A0005.
- Both items are interconnected and mounted inside a seawater-resistant cabinet
- Designed to be used together with ACM exchanges for wall mounting.
- To be used together with a separate loudspeaker
- Public Address messages via General Call and Group Calls
- Reception of Alarm signals with top priority
- Screw terminals for easy connection of installation cables and optionals




SPECIFICATIONS

Operation voltage	Powered from exchange
Cable requirements	Twisted 2 pairs 0.5mm ² outer screen
Connections	Screw terminals
Loudspeaker Output	3.5 W (20 ohm)
Internal Loudspeaker impedance	50 ohm
Frequency range	500 - 5000 Hz
Material cabinet	Polycarbonate
Colour	RAL7032
IP- class	IP-66
Dimensions (mm)	310W x 215H x 160DT
Weight	4.5 kg
Specification VMP-530	See datasheet VMP-530 Doc.no. A100K 10531

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
VMP-530VHM	Main station w7handmic in waterproof cabinet	4.5 kg
Supplementary equipment VML-1520	Hornspeaker 15W, 20ohm waterproof	1.35 kg

VMP-530VHM MAIN STATION IN WATERPROOF CABINET

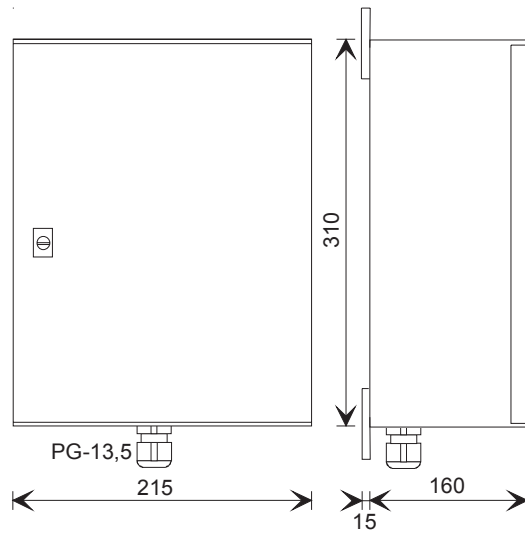

MOUNTING HOLES Ø 8,5

