



1007040000

Wall Master Station

Standard

Description

- Fully equipped analogue master station with free access to all extensions and features
- Conformity with the latest Vingtor-Stentofon station design with rugged front plate in anodized brushed aluminium and silicone rubber keypad
- Private / Open switch
- Built-in 63 Ohm / 1 W loudspeaker
- Adjustable loudspeaker volume
- Excellent sound quality

The 7040 station is a fully equipped analogue master station with free access to all extensions and features. This master station is designed for both flush and surface mounting; in- and on-wall back boxes are available for this purpose. The station can also be flush mounted into a desk.


page 1/3

Typical application areas are hospitals, airports, stores and warehouses, factory shop floors and nurseries. A modular RJ45 jack plug on the station facilitates quick and easy connection. A CAT3 or higher or a 2-pair 0.5 mm2 twisted telephone cable is required between the exchange and the station. The maximum distance is 1.4 km with 0.5 mm2 cable. Longer distances are possible by using heavier wires.

The station is equipped with a sensitive electret microphone and a 1 W loudspeaker. The loudspeaker volume is easily adjustable on the station front.

See also: additional documentation on wiki.zenitel.com

Technical Dimensions

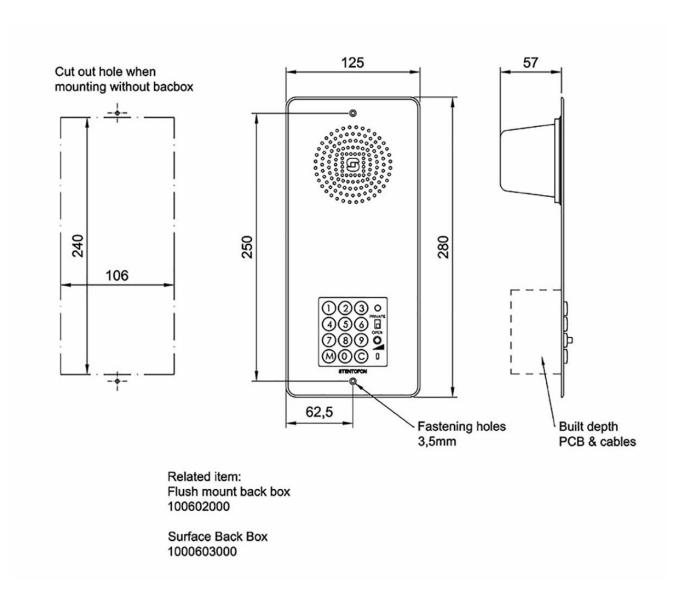

Specifications

MECHANICAL

Operation Voltage	Powered from exchange
Cable Requirements	2 pair twisted cable, 0.5 mm2 / 24 AWG
Temperature	-40oC to +55oC
Relative Humidity	0% - 95%
Dimensions: (WxHxD)	125 mm x 280 mm x 53 mm
Finish	Anodized brushed aluminium
Loudspeaker Output	1 W
Loudspeaker Sound Pressure Level	75 dB @ 1 KHz, 2.5 VRMS on ab-wire, 100 m 0.5 mm2 cable
Connector Type	RJ45 Modular Jack
Indicator	LED (red)

page 3/3