zenitel

DATASHEET



1008116010

# TMIS-1

Turbine Mini-Sprechstellen

TOP PICKS
*Compiled by Security Products' Staff*

- Unterdrückung von Hintergrundgeräuschen
- Langlebig dank robustem Aluminium-Druckgussrahmen
- Unterstützt eine breite Palette von IP- und Netzwerkstandards
- Weiße thermoplastische Frontplatte mit einer Taste
- ONVIF-kompatibel
- Ideal für die Gebäudesicherheit und öffentliche Umgebungen

Zenitel Connect | Door Intercom | SIP | ONVIF Conformant | UL Certified Intercom

IC-Edge | ICX-AlphaCom | HD Voice

## Beschreibung

Alle IP-Sprechstellen der Turbine-Serie nutzen modernste Technologie für eine unvergleichliche Audioqualität. Zu den zahlreichen Funktionen gehören unter anderem HD-Sprachqualität, Open Duplex, aktive Geräuschunterdrückung, MEMS-Mikrofon und ein Class-D-Verstärker.

Diese Funktionen sowie unsere über 65-jährige Erfahrung mit Akustiktechnologie sind nur einige der vielen Faktoren, die zur überragenden Audioqualität unserer Produkte beitragen.






Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Siehe auch: zusätzliche Dokumentation auf wiki.zenitel.com

# Technical Dimensions

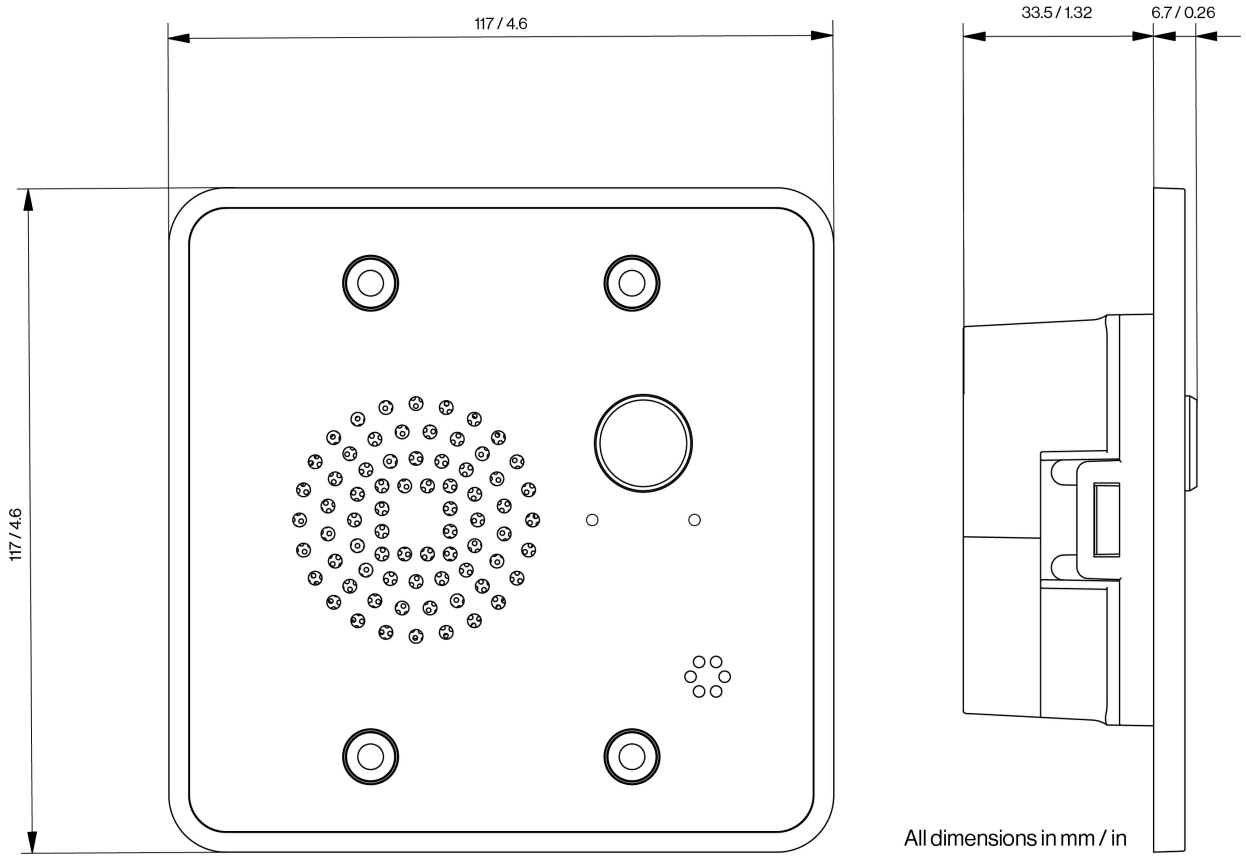






Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

# Spezifikationen



www.zenitel.com info@zenitel.com Last revision date: 2025-10-23 10:34

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

**AUDIO**

| | |
|---|---|
| SPL-Nennleistung bei 1 m | 90 dB |
| Noise Cancelling – Unterdrückung von Musikgeräuschen | JA |
| Noise Cancelling – Unterdrückung von Störgeräuschen | JA |
| Codecs | G.711, G.722, G.729 |
| Frequenzbereich, G.722 Codec | 200 Hz – 7000 Hz |
| Audiotechnik | Modi: Vollständig offener Duplex, geschalteter offener Duplex, |
| | Adaptiver Jitterfilter |
| | Benutzerdefinierter Klingelton |
| | Audio-Mixing – Konversation und Gruppenanruf |
| | Schallpegelerkennung / Schreialarm (nur in AlphaCom) |
| | Automatische Verstärkungsregelung (Mikrofon) |
| Interner Lautsprecherverstärker | Klasse D |
| Mikrofontechnik | Digitales MEMS, omnidirektionales Mikrofon |
| Automatische Lautstärkeregelung (AVC) | Unverzerrter und klarer Ton |
| Akustische Echounterdrückung (AEC) | Verhindert Audio-Rückkopplungen auch bei hoher Lautstärke |
| Interner Lautsprecherverstärker | 10 W Klasse D |
| Interner Lautsprecher | 1 W |





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

**HARDWARE**

| | |
|---|---|
| Ethernet-Anschluss | 1 x RJ45 |
| Alle anderen Anschlüsse | Werkzeuglose, federbelastete, vibrationsfeste Anschlüsse |
| Allgemeine Ein- und Ausgänge | 6 (konfigurierbar) |
| Ausgänge | 12 mA als LED-Treiber |
| Umschaltrelais (NO+NC+COM) | SELV |
| Energieoptionen | PoE und/oder externe Stromversorgung |
| PoE (Stromversorgung über Ethernet) | IEEE 802.3af-Standard, Klasse 0 (0,44 W bis 12,95 W) |
| Externe Stromversorgung | 24 VDC (16 – 48 V) |
| Stromverbrauch | 2,8 W |
| Audio-Line-Out / Induktionsschleifensignal | 0 dBu / 600 Ohm |
| Tastenbeleuchtung | LED |
| Anrufanzeige | Symbole/Farben für Hörgeschädigte |





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

## KONSTRUKTION

| | |
|---|---|
| Abmessungen (HxBxT) | 117 x 117 x 39 mm |
| Abmessungen nach bündiger Montage | 117 x 117 x 5,5 mm |
| Gewicht | 0,3 kg |
| Knopfmaterial | 3 mm / 0,12 Zoll<br>Polycarbonat (transparent) |
| Frontplattenmaterial | 2 mm / 0,12 Zoll PMMA,<br>farbig auf der Rückseite<br>bedruckt |
| Basis-/Rahmenmaterial | 3 mm / 0,12"<br>Aluminiumlegierung -<br>A413.0, AlSi12Fe, lackiert |
| Material der Elektronikabdeckung | Polycarbonat<br>(lichtdurchlässig) |
| Lautsprecher-Stoßschutz, Objekte mit großem Durchmesser | Thermoplastische<br>Frontplatte mit<br>bearbeitetem Gitter |
| Lautsprecher-Stoßschutz, Objekte mit kleinem Durchmesser | Edelstahlgewebe,<br>akustisch transparent |





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

## NETZWERKE & PROTOKOLLE

| | |
|---|---|
| Protokolle | IPv4 (mit DiffServ), SIP, TCP, UDP, HTTPS, TFTP, RTP, SRTP, DHCP, SNMP, ONVIF, CCoIP®, NTP |
| LAN-Protokolle | Power over Ethernet (IEEE 802.3 af), Netzwerkzugriffskontrolle (IEEE 802.1x) |
| Management und Betrieb | HTTP/HTTPS (Webkonfiguration), DHCP und statische IP + IC-EDGE, Remote-Software-Upgrade, zentrale Überwachung |
| Erweiterte Überwachungsfunktionen | zB Netzwerktest, Tontest, Statusberichte (nur in AlphaCom) |
| SIP-Unterstützung | RFC 3261 (SIP-Basisstandard), RFC 3515 (SIP-Referenz), RFC 2976 (SIP-Info), SIP mit TLS, RFC 5630 SIPS-URI-Schema |
| DTMF-Unterstützung | RFC 2833, 2976 (SIP-Informationen) |



Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

### UMWELT & KONFORMITÄT

| | |
|---|---|
| Schutzart | IP-42 |
| UV-beständig | JA |
| Betriebstemperaturbereich | -25° bis 55° C / -13° bis 131° F |
| Lagertemperaturbereich | -25° bis 55° C / -13° bis 131° F |
| Relative Luftfeuchtigkeit | < 95 % nicht kondensierend |
| EMV | CE und FCC Teil 15 |
| Zertifizierung | UL 62368-1, EN 62368-1 |
| Konformitäten | EN 61000-6-1, EN 61000-6-3 |

### WEITERE SPEZIFIKATIONEN

| | |
|---|---|
| Herstellungsland | Polen |
| IP-Adressinformationen | Spricht die IP-Adresse nach dem Systemstart |
| Garantie | 2 Jahre Standardgarantie, verlängerbar auf insgesamt 5 Jahre (Aufpreis) |

## Zubehör



Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



## TA-2

US 2-Gang 3½" Deep Backbox

Artikelnummer 1008140020



## TA-3

2½" Deep Flushmount Backbox for Turbine Compact & & Mini

Artikelnummer 1008140030



## TA-13

Turbine Mini On-Wall Back Box White

Artikelnummer 1008140130





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.