

1490004010

ITSV-4

HD IP-videopuhelin, jossa 5" näyttö



- ✓ 16 linjaa ja jopa 16 SIP-tiliä
- ✓ 5,0" (1280×720) kapasitiivinen 5-pisteen kosketusnäyttö HD TFT LCD
- ✓ Sisäänrakennettu 2 megapikselin CMOS-käännettävä kamera, jossa on yksityisyys suljin, 720p 30fps
- ✓ 10-osainen äänikferenssi ja 3-osainen videokonferenssivalmius
- ✓ Kaksimikrofoninen HD-kaiutinpuhelin melunvaimennuksella, edistyneellä kaiunkaikien vaimennuksella ja erinomaisella kaksoiskeskustelun suorituskyvyllä
- ✓ 4-ytiminen 1,8 GHz ARM Cortex A55 -prosessori, jossa on 2 GB RAM ja 16 GB eMMC Flash

 Zenitel ConnectPRO  Video Intercom  SIP  Bluetooth  IC-EDGE  ICX-AlphaCom Audio  HD Voice Video

 H.264


Kuvaus

html

ITSV-4 on tehokas pöytävideopuhelin, jossa on Android 11, 5" kapasitiivinen kosketusnäyttö, kallistettava kamera, HDMI-lähtö, kaksoismikrofonit ja 720p HD-videotuki. ITSV-4 tarjoaa edistyneitä SIP-puhelinkehusominaisuuksia ja valmiiksi integroidun yhteensopivuuden IC-EDGE ja ICX-AlphaCom IP-intercom-alustojen kanssa.

[Siirry Zenitel Wikiin saadaksesi lisätietoja](#)

Technical Dimensions

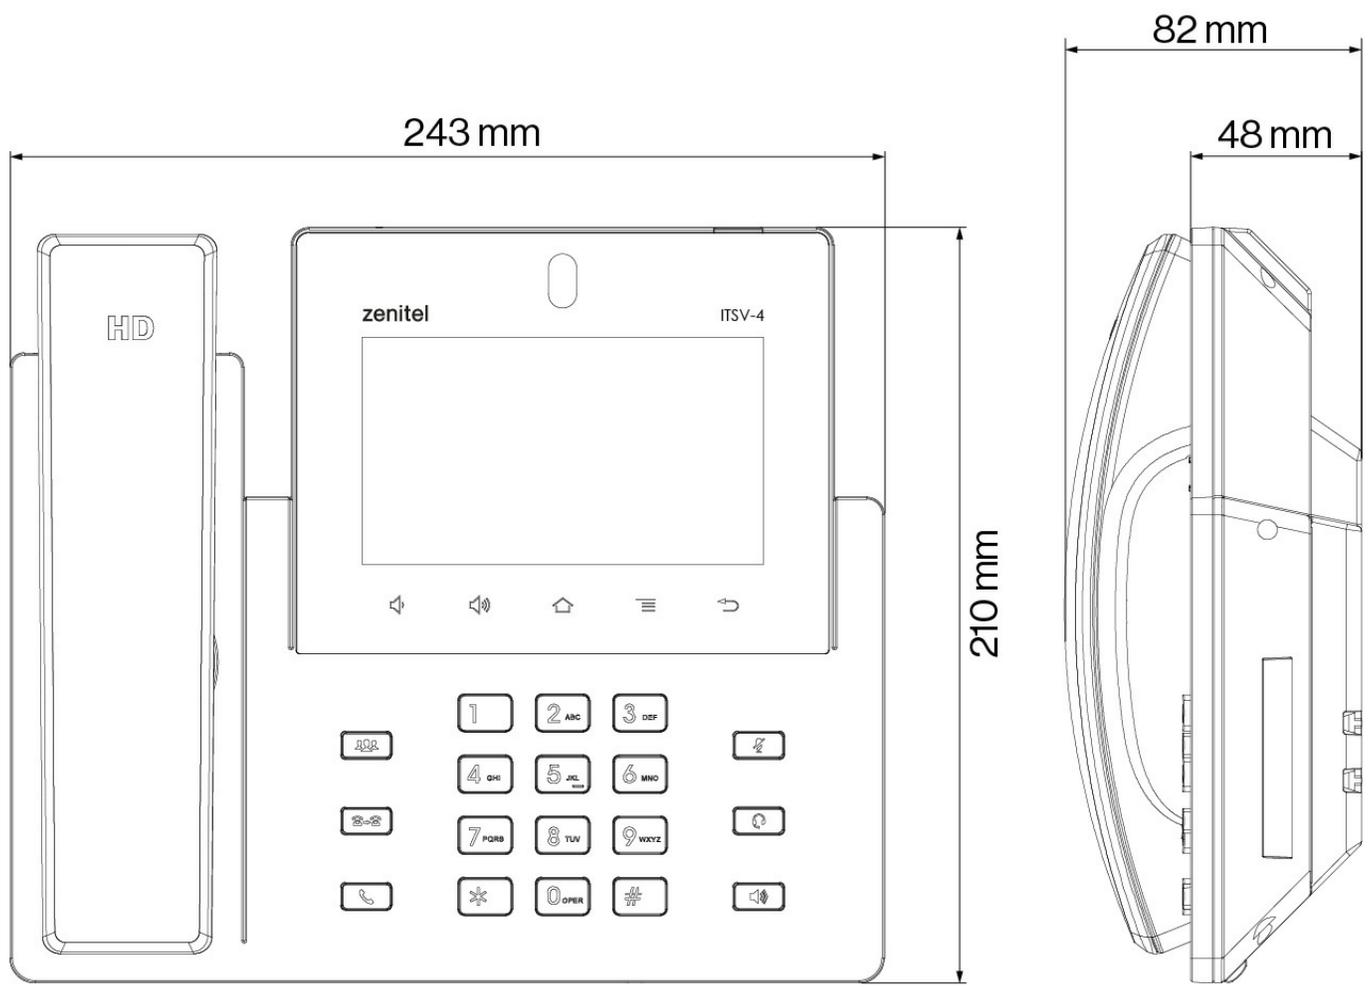

Specifications

SPECIFICATIONS

Graphic Display	5.0 inch 1280×720 capacitive touch screen (5 points) HD TFT LCD
Camera	Built-in 2 mega-pixel CMOS tiltable camera with privacy wheel, 1080p 30fps
Auxiliary Ports	RJ9 headset jack (allowing EHS with Plantronics headsets), extension module port, USB 2.0 port, USB 3.0 port
Feature keys	11 functions keys for CONFERENCE, TRANSFER, SEND/REDIAL, MUTE, EARPHONE, SPEAKERPHONE, VOLUME +/-, 3 dedicated Android keys for HOME, MENU, and BACK
Video Codec	H.263, H.264 BP/MP/HP
Video resolution	Up to 720p
Video frame rate	Up to 30 fps
Operating temperature range	0°C to +40°C
Storage temperature range	-10°C to +60°C
Relative humidity	10% - 90% non-condensing
Power options	Power over Ethernet (PoE & PoE+) or power adapter.
Power over Ethernet	802.3af Class 3, 802.3at Class 4
Power adapter	Input: 100-240VAC 50-60Hz; Output 12VDC 1.5A
Network Interface	2 x RJ45 (Ethernet) 10/100/1000 Mbps with integrated PoE/PoE+
Bluetooth	Integrated, Bluetooth 5
Wi-Fi	Integrated, dual-band 2.4 & 5GHz with 802.11 a/b/g/n/ac
Security	User and administrator level passwords, random default admin password, MD5 and MD5-sess based authentication, 256bit-AES encrypted configuration file, TLS, SRTP, HTTPS, 802.1x media access control, anti-hacking secure boot
Protocols/Standards	SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A record, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, LLDP-MED, LDAP, TR-069, 802.1x, TLS, SRTP, IPv6, OpenVPN®
Audio technology	Wide-band Opus, wide-band G.722, G.711µ/a, G. 729A/B, G.726-32, iLBC, in-band and out-of-band DTMF (In audio, RFC2833, SIP INFO), VAD, CNG, AEC, PLC, AJB, AGC, ANS, Noise Shield 2.0

Language support	English, German, Italian, French, Spanish, Portuguese, Russian, Croatian, Chinese, Korean and Japanese
Compliance	FCC: Part 15 (CFR 47) Class B; UL 60950 (power adapter); Part68 (HAC) CE: EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, EN60950-1, EN62479, RoHS RCM: AS/ACIF S004; AS/NZS CISPR22/24; AS/NZS 60950; AS/NZS 4268 Safety
Dimensions (WxLxH)	243 x 210 x 48 mm
Weight	1 kg
Warranty	2 Years standard warranty, extendible up to total of 5 years (additional fee)

Accessories



[Wall Mount Bracket for ITSV-4](#)

Used With



[TCIV-2+ | Video intercom](#)

IP and SIP Video Intercom



[TCIV-3+ | Video intercom](#)

IP and SIP Video Intercom



[TCIV-5+ | Video intercom](#)

IP and SIP Video Intercom



[TCIV-6+ | Video Intercom](#)

IP and SIP Video Intercom



[TKIV+ Video Intercom kit](#)

Turbine Video - VoIP Intercom Module



TEIV-4+ | Video Intercom with RFID card reader space

IP & SIP Video Intercom with RFID card reader space



TEIV-1+ | Video Intercom with Keypad and Display

IP and SIP Video Intercom with Keypad and Display