



\* ACM-M-A24-2-V2 & ACM-M-A36-2-V2 INCLUDE TWO FXO TRUNK LINES. OPTIONAL LICENSE TO EXTEND TO FOUR FXO TRUNK LINES.  
 OPTIONAL 4 OR 8 LINE FXO GATEWAY FOR OTHER SKU.

**ACM-M-AXX-V2 CAN BE POWERED AS FOLLOWING:**  
 - 115VAC MAINS + 115 VAC UPS  
 - 230VAC MAINS + 230 VAC UPS  
 - 115 / 230 VAC MAINS + 24VDC EMERGENCY

**RECOMMENDED CABLES:**  
 TWISTED PAIRS WITH AN OUTER ISOLATED BRAIDED SCREEN  
 0,5 OR 0,75 SQ.MM CABLES

**POWER CABLES:**  
 MINIMUM 1,5 SQ.MM FOR MAINS / UPS  
 2,5 SQ.MM OR HIGHER FOR 24VDC EMERGENCY.

**JB-15T CAN BE REPLACED WITH YARD SUPPLY JUNCTION BOXES**

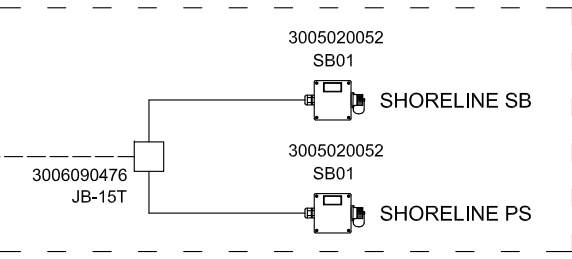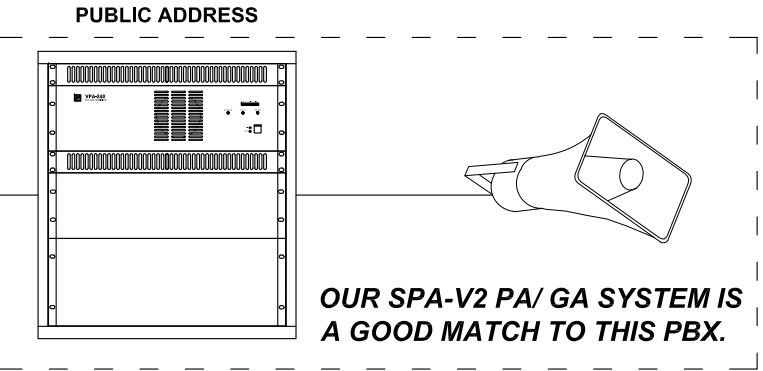

© Zenitel - All rights reserved

Rev.	Date	Revision text	Approved	Date

		Prep.by	Date	Project no.	
		RZ	05.11.15	-	
ACM COMMUNICATION SYSTEM PBX Telephone exchange Type ACM-M-A-V2 O. no. 300620446/-48/-51/-53 Single line diagram		App. by	Date	Rev. by	Rev.date
		ZS	13.01.16	MSK	13.01.16
Dwg.no. <b>ACM-M-A Line diagram</b> 01		Rev.no.		Unit MM	
		ACM-M-A Line diagram		01	
Sheet 1/1	Scale N/A	Size A3	Unit MM		