zenitel

DATASHEET

1007080000

# Poste principal industriel léger




Poste industriel

## Description

- Poste principal résistant aux projections d'eau, entièrement équipé avec plein accès à l'ensemble des abonnés et des fonctionnalités Vingtor-Stentofon
- Boîtier en plastique ignifugé et résistant aux chocs, face avant et clavier en PVC avec protection UV, poste résistant aux liquides corrosifs
- Microphone électret et voyant rouge d'indication de mise en communication
- Raccordement des câbles sur bornier à vis
- Haut-parleur intégré et possibilité de connecter un haut-parleur externe, potentiomètre intgré pour régler le volume
- Amplificateur 10 W (8 Ohm) géré par VOX intégrépour une sortie amplifiée supplémentaire

Ce poste principal industriel léger résistant aux projections d'eau est adapté aux environnements humides, sales et poussiéreux. Son boîtier ignifugé et résistant aux chocs est fabriqué en plastique Bayblend®. La face avant, clavier inclus, est



www.zenitel.com info@zenitel.com Last revision date: 2024-04-19 09:06


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

en PVC avec protection UV, une matière qui résiste à différents liquides corrosifs. Afin de faciliter l'installation et l'entretien du poste, la face avant peut être retirée. Ce modèle possède également un bornier à vis et les presse-étoupes permettent un raccordement des câbles étanche à l'eau et à la poussière.

La sensibilité du microphone électret s'ajuste automatiquement en fonction du niveau sonore d'entrée et garantit ainsi un signal sans distorsion sur le haut-parleur intégré de 45 Ohm. Le volume se règle grâce à un potentiomètre intégré au poste. Vous pouvez ajouter un haut-parleur externe de 20 à 70 Ohm connecté à la sortie non-amplifiée ou un haut-parleur de 8 à 20 Ohm connecté à la sortie amplifiée. L'amplificateur intégré nécessite une alimentation de 12 V AC/2A séparée. Le haut-parleur externe doit être placé à au moins 1 mètre du poste, lequel peut être programmé en mode Privé de manière permanente et auquel vous pouvez connecter un combiné.

## Technical Dimensions

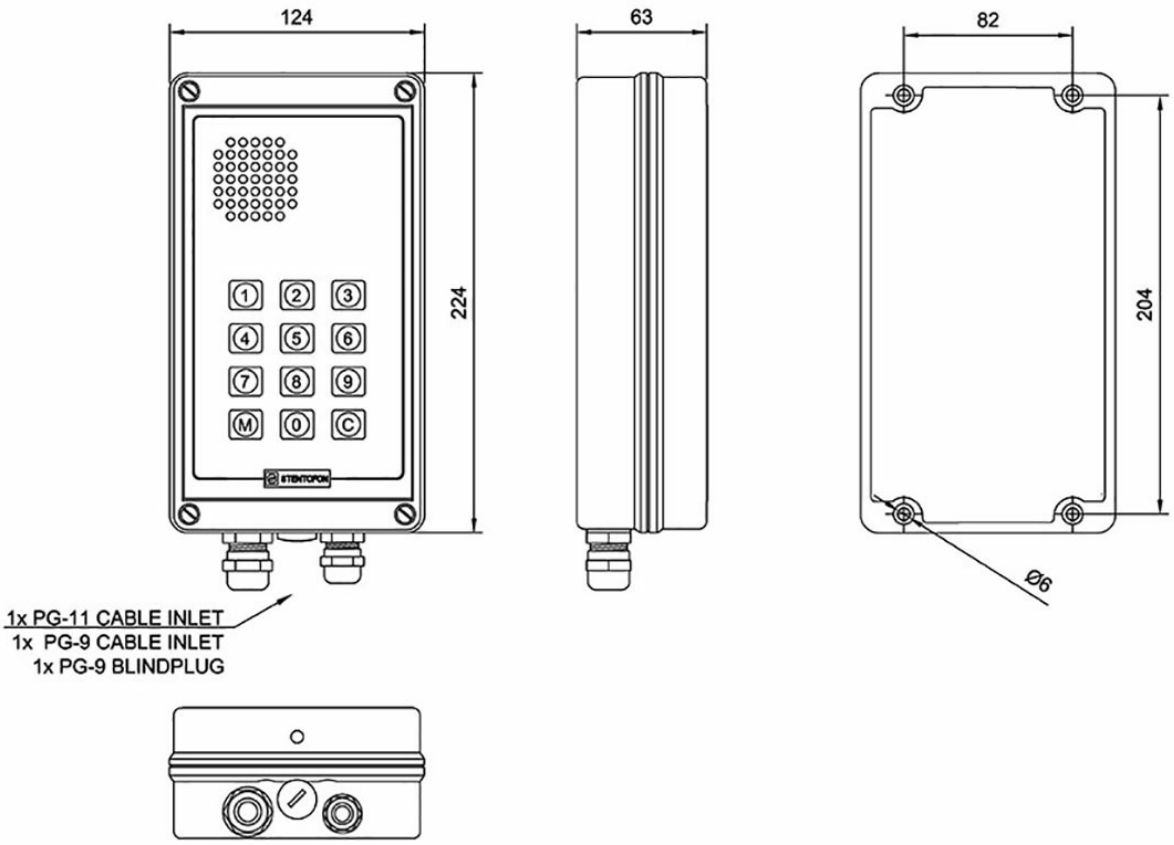






Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

# Spécifications

| MÉCANIQUE | |
|---|---|
| Référence | 1007080000 |
| Alimentation | Alimenté par le serveur sans amplificateur, 12V AC / 2 Amp avec amplificateur |
| Câble requis | Câble 2 paires 0,5 mm2 / 24 AWG câble de téléphone torsadé + câble 1 paire 0,8 mm2 / 20 AWG (pour transformateur si l'amplificateur de puissance est utilisé) |
| Températures de fonctionnement | De -40°C à +55°C |
| Humidité supportée | De 0% à 95% |
| Dimensions (LxHxP) | 124 x 244 x 63 mm |
| Indice de Protection | IP-54 |

| RÉFÉRENCE | DESCRIPTION | POIDS À L'EXPÉDITION |
|---|---|---|
| 1007080000 | Poste principal industriel léger | 0,9 kg |
| Équipement supplémentaire : | | |
| 3006100088 | VML-1520 Haut-parleur 20 ohm, 15 W | |
| EOTRF 10115 | Transformateur 220V AC / 12 VAC (avec amplificateur de puissance) | 1 kg |



www.zenitel.com info@zenitel.com Last revision date: 2024-04-19 09:06

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

**GÉNÉRAL**

| | |
|---|---|
| Finitions | Plastique Bayblend®, Clavier en PCV avec protection UV (résistant à : Alcool-Ethyl, White Spirit, Alkali, Acide de batterie, Méthanol, Acide chlorhydrique, Acide citrique, Antigel, Insecticides, Cola, Désinfectants, Huile de moteur, Détergents, etc.) |
| Pression acoustique à 1 m du haut-parleur intégré | 66 dB (câble 0,5 mm x 100 m, 8,0 V sur la carte de ligne abonné, 1 kHz) |
| Puissance maximale du haut-parleur externe | 1,5W (20 Ohm), 10W (8 Ohm) avec amplificateur |
| Impédance du haut-parleur | 45 Ohm (haut-parleur intégré) / 20-70 Ohm haut-parleur externe (sans amplificateur) / 8-20 Ohm haut-parleur externe (avec amplificateur) |
| Fréquence | 500-5000 Hz (± 8 dB) |
| Impédance microphone pour combiné | 200 - 600 Ohm |
| Connecteur | Bornier à vis |
| Diamètre presse-étoupe | 1 x PG9, 1 x PG11 |
| Indicateur de service | LED rouge |

# Accessoires





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.




## VMP-36-PEL-A

Headset with boom mic, headband, and 10m cable for VMP Station

Référence Produit: 1020600767




## VMP-36-PEL-A/15

Headset with boom mic, headband, and 15m cable for VMP Station

Référence Produit: 1020600769




## VMP-36-PEL-A/20

Headset with boom mic, headband, and 20m cable for VMP Station

Référence Produit: 1020600770




## VMP-36-PELP-A

Headset with boom mic, headband, and 10m cable

Référence Produit: 1020600768




## CD-7-VMP

Boîtier de raccordement waterproof pour VMP-36-PELP

Référence Produit: 3006202007




## VMP-211

Combiné mural

Référence Produit: 3006202024




## VMP-250

Combiné waterproof pour poste principal industriel, montage mural

Référence Produit: 1020600700



## VML-1520

Haut-parleur à chambre de compression 15W, 20 OHM, waterproof

Référence Produit: 3006100088





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.




## EHS-24O – Rotary Signal Light, 24 V DC (Orange)

Rotary Light 24V DC

Référence Produit:
3006102041




## EHS-220O

Gyrophare orange 220 VAC

Référence Produit:
3006102036



## Model-A

Telephone Booth

Référence Produit:
3005000029



## IRR-3

Relay Box

Référence Produit:
1020600992





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.