zenitel

DATASHEET

3005010235

VPA-120

Amplificateur de puissance 120 W



Description

- Amplificateur de puissance 120 W rackable
- Sortie 100 V et 8 Ohm
- Entrées doubles avec commutation prioritaire
- Température contrôlée, ventilation d'arrière en avant
- Secteur 115 / 230 VAC et batterie de secours 24 VDC
- Surveillance de ligne avec signal pilote
- Puissance de sortie 24 VDC / 800 mA pour les équipements externes
- Signal sonore avec interrupteur On / Off

www.zenitel.com info@zenitel.com

Last revision date: 2023-10-05 15:53

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


L'amplificateur de puissance VPA Vingtor-Stentofon est conçu pour être utilisé sur les navires. Il doit être monté en rack 19", occupant 3 U avec une grille de ventilation occupant 1 U.

L'amplificateur est protégé contre les surcharges et les courts-circuits. Une ventilation de contrôle de la température assure une haute fiabilité à des niveaux de sortie élevés et peu de bruit de ventilation à des niveaux de sortie plus faibles.

L'amplificateur fonctionne en 115/230 VAC et dispose d'une option pour la commutation automatique vers la batterie de secours 24 VDC en cas de panne de courant. Il est surveillé par un pilote de signal pour vérifier le chemin du signal en permanence et toute erreur est notifiée par un indicateur situé à l'avant avec contact de fermeture pour l'avertissement d'erreur externe.

L'amplificateur est équipé d'un générateur de sonnerie activé par la commutation prioritaire pour générer un signal d'alerte avant une annonce.

Technical Dimensions

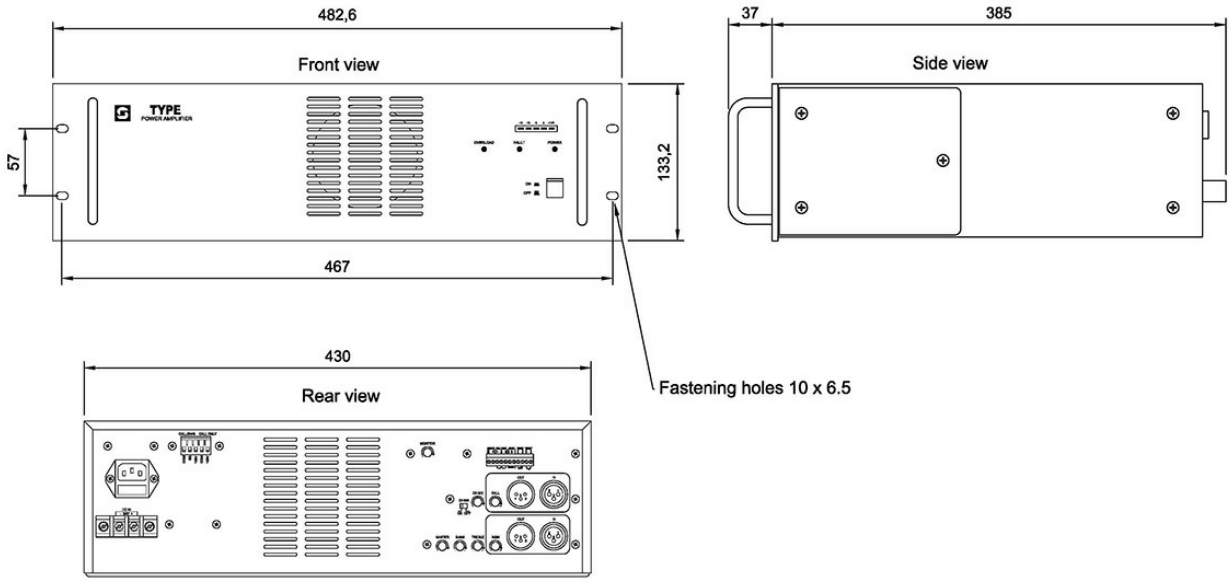

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spécifications

GÉNÉRAL

Couleur	Noir
Dimensions (LxHxP)	482 x 133 x 420 mm
Poids	18,2 kg
Alimentation	115 / 230 VAC ±10%, 50 / 60 Hz, 391 VA, 24 VDC ± 25% - max 7,5 A
Températures de fonctionnement	De -15°C à +55°C
Humidité supportée	< 95%
Sortie	100 V, 8 Ohm - 120 W
Réponse en fréquence	50 Hz – 20 kHz ±3 dB
Distorsion	< 1% à 1 kHz
Entrée de ligne	1 V ± 50% dans 47 kOhm, équilibré
Connecteur	XLR 3 broches
Sécurité	EN 60065
Testé conformément aux normes	EN 60945, IACS E10, CEI 60533
Connexions	Borniers à vis
LED d'indication	VU-mètre, Alimentation On, Surcharge, Erreur
Contrôle	Commandes de niveau pour les entrées pour les appels et la musique d’ambiance, volume maître, Sonnerie On / Off et ajustement du volume, volume du moniteur

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Accessoires



RS-3C

Amplifier Rack

Référence Produit:
3006206019

www.zenitel.com info@zenitel.com Last revision date: 2023-10-05 15:53

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.