zenitel

DATASHEET

AK5850H

AK5850HS

Casque approuvé ATEX



IP54 ICX ICX-AlphaCom Exigo

Description

CARACTÉRISTIQUES

- Casque résistant certifié ATEX pour une utilisation en atmosphères explosibles
- Microphone avec suppression de bruit
- Réduction de bruit de fond numérique haute qualité*
- Compatible avec la qualité de voix HD*
- Audio haute qualité

www.zenitel.com info@zenitel.com

Last revision date: 2026-01-20 12:05

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

- Des oreillettes optionnelles peuvent être connectées pour une meilleure qualité de son dans les environnements extrêmement bruyants
- Indice de Protection IP-66 contre la poussière et l'eau
- Connecteur standard Nexus 4 pôles pour une connexion et un remplacement faciles
- A utiliser avec le câble pour combiné avec PTTapprouvé ATEX 1008150025
- Conçu pour être utilisé avec les postes Turbine ATEX

*Lorsqu'il est utilisé avec les postes industriels Turbine

DESCRIPTION

Le casque industriel haut qualité certifié ATEX AK5850HS est conçu pour être utilisé dans les environnements les plus exigeants. Il comporte un microphone ajustable et un court câble spiralé pour une connectivité flexible via une prise Nexus 4 pôles.


Lorsqu'il est utilisé avec le câble et boîtier de raccordement ATEX pour casque avec PTT, TAX-2B, il offre une longueur de câble exceptionnelle de plus de 10 mètres. Le fait que le casque soit enfichable va de paire avec un entretient et un remplacement faciles et permet aux utilisateurs de se servir de leur propre casque comme aide auditive et de le déconnecter une fois la conversation terminée.


Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-01-20 12:05

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

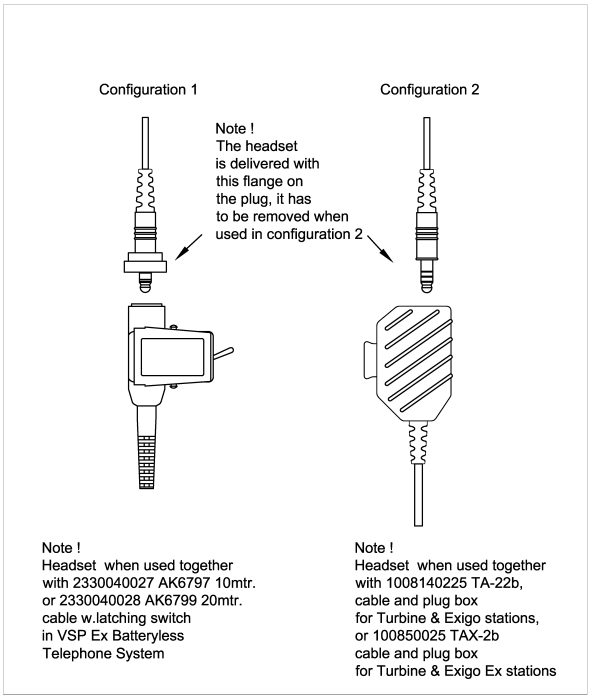

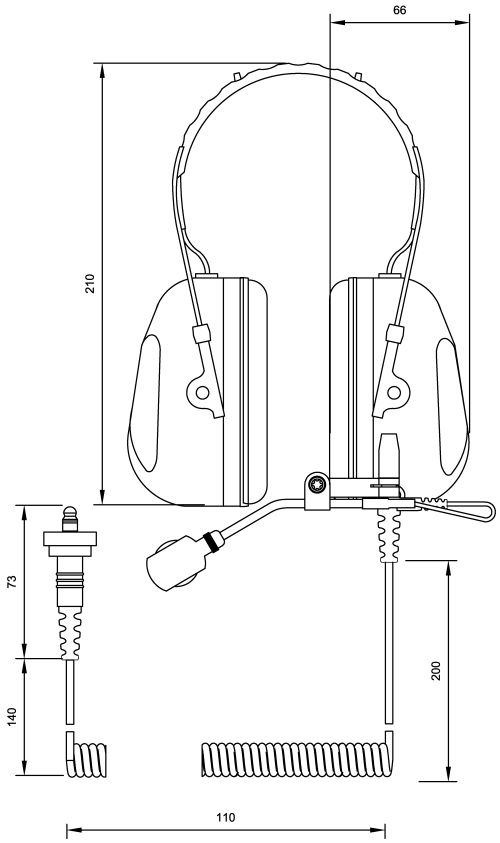

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spécifications

MÉCANIQUE	
Poids	400 g

ENVIRONNEMENT	
Températures de fonctionnement	De -40°C à +60°C
Indice de Protection IP	IP-66

ÉLECTRIQUE	
Impédance	230 Ohm
Sensibilité du microphone	4 mV / 220 Ohm

ACOUSTIQUE	
Réponse en fréquence	-12 dB à 1 kHz
Réduction de bruit	90 - 7000 Hz

www.zenitel.com info@zenitel.com Last revision date: 2026-01-20 12:05

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

ATTÉNUATION DU BRUIT

Au dessus de 1 kHz	De -35 à -40 dB
500 - 1000 Hz	De -27,5 à -35 dB
125 - 500 Hz	De -15 à -27,5 dB
H84	31 dB (avec oreillette : 39 dB)
M84	26 dB (avec oreillette : 37 dB)
L84	20 dB (avec oreillette : 33 dB)
SNR84	29 dB (avec oreillette : 40 dB)
NRR	21 dB

CERTIFICATIONS

Normes de sécurité CENELEC	EN 60079-0: 2012 + A11: 2013 & EN 60079-11: 2012
Normes de sécurité CEI	CEI 60079-0: 2011, CEI 60079-11: 2011
Marquage	II 2G Ex ib IIC T4 Gb, -40°C ≤ Ta ≤ +60°C
Certificat ATEX	Nemko 03ATEX1351
Certificat IECEx	IECEx PRE 15.0063

Accessoires

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



TAX-2B

Câble et boîtier de raccordement ATEX pour casque avec PTT

Référence Produit: 1008150025



TA-22B

Industrial Plugbox & Cable for Headset with PTT

Référence Produit: 1008140225



Headset Stowage Bracket

Headset stowage Bracket for Wall mounting

Référence Produit: 3006090494



Spare Boom Microphone for Headset

Spare Boom Microphone for all A-Kabel type Headsets

Référence Produit: AK6070

Used With



EAPFX-6

EXIGO Panneau d'accès industriel ATEX, 6 boutons

Référence Produit: 1023221616



EAPFX-1

EXIGO Panneau d'accès industriel ATEX

Référence Produit: 1023221611



TFIX-1-V2

Poste Interphone IP Ex - clavier complet

Référence Produit: 1008123110



TFIX-2-V2

Poste interphone IP Ex avec 6 boutons

Référence Produit: 1008123120

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



TFIX-3-V2

Poste interphonie IP Ex avec 3 boutons

Référence Produit: 1008123130



TFIE-1

Interphone IP SIP

Référence Produit: 1008122010



TFIE-2

Interphone IP SIP

Référence Produit: 1008122020



EAPII-1

Panneau d'accès industriel Exigo, 1 Bouton

Référence Produit: 1023201201



EAPII-6

Panneau d'accès industriel Exigo, 6 Boutons

Référence Produit: 1023201206

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



TFIE-6

Interphone IP SIP

Référence Produit:
1008122060

www.zenitel.com info@zenitel.com Last revision date: 2026-01-20 12:05

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.