zenitel

DATASHEET

1008122020

TFIE-2

Interphone IP SIP



Poste industriel | Interphonie certifiée UL | IP-66 | Volume automatique

Qualité de voix HD | Contrôle automatique du gain | Suppression de Bruit Active

Open Duplex | Détection d'activité vocale

Description

- Poste CCoIP / VoIP conçu pour les environnements industriels
- Double connectivité Ethernet pour réseaux redondants
- Alimentation PoE

www.zenitel.com info@zenitel.com

Last revision date: 2025-06-27 15:59

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

- Redondance d’alimentation DC
- Fonctionnalité DIP pour une utilisation avec les serveurs audio AlphaCom
- Fonctionnalité SIP / VoIP pour une utilisation avec les systèmes tierce partie
- 2 sorties de relais
- 6 entrées / sorties configurables
- Indice de Protection IP-66 contre la poussière et l’eau
- Les accessoires industriels comprennent un combiné PTT, un casque audio avec les options ON/OFF et PTT et un microphone à main PTT
- Surveillance et diagnostique automatique du poste
- Indicateurs d’état visibles sur la face avant


Le poste industriel TFIE-2 est un appareil robuste conçu pour être utilisé dans les environnements difficiles. Il répond aux exigences industrielles et offshore. Le boîtier en plastique a en effet été imaginé pour résister à la plupart des risques chimiques et environnementaux, tant sur terre qu’en mer. Le TFIE-2 dispose de 6 touches d’accès direct programmables et étiquetables. Des protections de touches optionnelles peuvent être ajoutées si vous l’utilisez en tant que panneau d’alarme. Ce poste d’interphonie est entièrement numérique. L’amplificateur interne de 10 W et le haut-parleur de 78 mm garantissent un son cristallin et un rendement élevé, atteignant jusqu’à 100 dB SPL. Les fonctions audio telles que la suppression de bruit active et la réduction acoustique de l’écho permettent une communication bidirectionnelle mains-libres ainsi qu’une qualité audio supérieure. Les indicateurs d’état du poste affichent l’état du système et sont compatibles avec AlphaCom et Exigo ainsi qu’avec les fonctionnalités SIP pour une utilisation de systèmes tierce partie.

Voir aussi : plus de documentation sur wiki.zenitel.com

Technical Dimensions

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

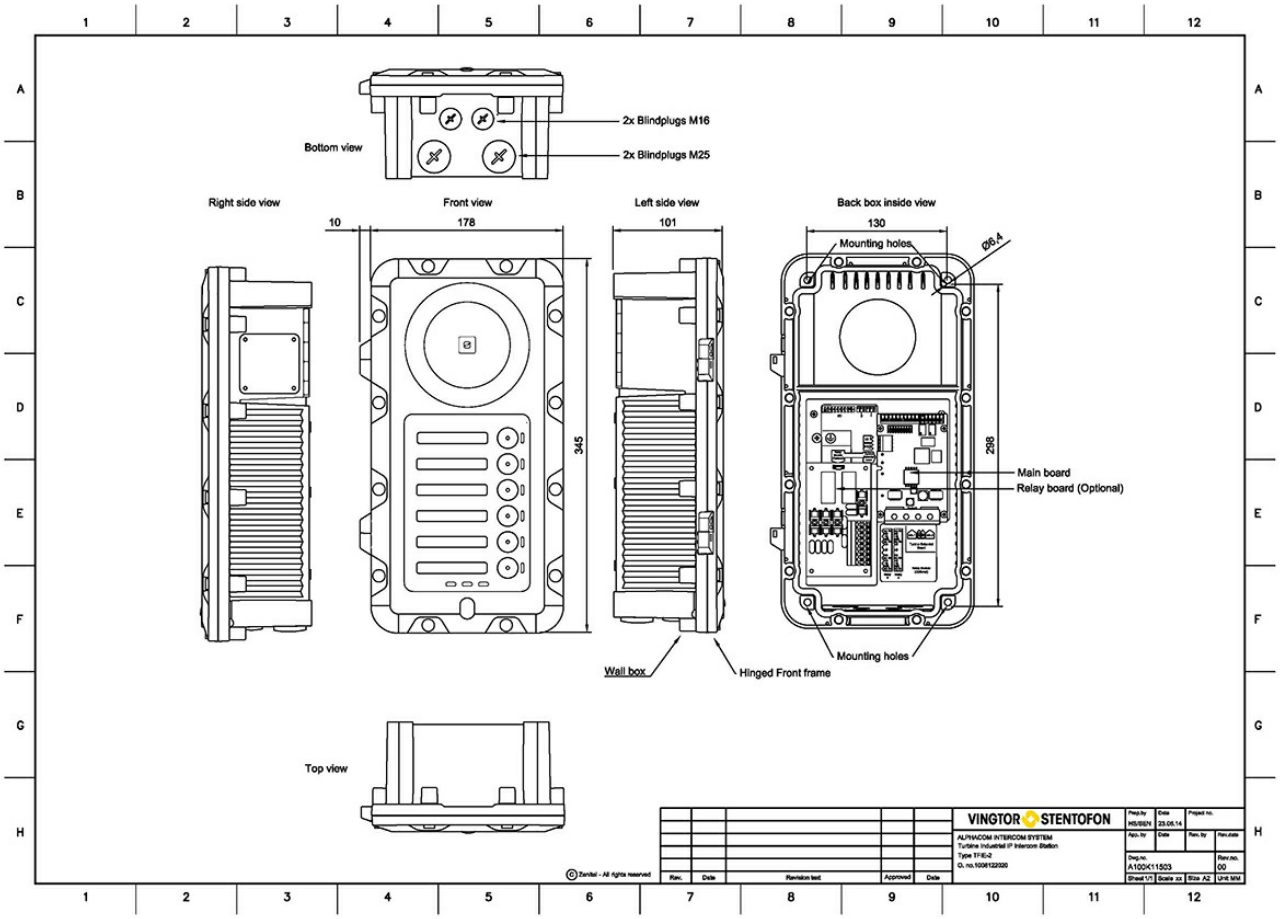

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spécifications

AUDIO	
Suppression du bruit - suppression musique de fond	OUI
Suppression du bruit - suppression bruit parasite	OUI
Suppression du bruit - suppression bruit à variation rapide	OUI
Codecs	G.711, G.722, G.729
Gamme de fréquence, codec G.722	200 Hz – 7000 Hz
Technologie audio	Modes : Full open duplex, Switched open duplex
	Tampon de gigue adaptatif
	Générateur de tonalité local
	Mélangeur audio - 3 canaux
	Détection niveau sonore (déclenchement d'alarme au cri)
	Contrôle gain automatique (microphone)
	Ajustement volume automatique
Amplificateur haut-parleur interne	10 W classe D

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

MÉCANIQUE	
Dimensions	345 x 178 x 101 mm
Poids	1,9 kg
Montage	Boîtier applique (inclus)
Couleur	Jaune + Noir

ENVIRONNEMENT	
Températures de fonctionnement	De -40°C à +70°C
Températures de stockage	De -40°C à +70°C
Humidité supportée	De 10% à 95% RH (sans condensation)
Humidité de stockage	De 10% à 95% RH (sans condensation)
Pression atmosphérique	De 600 hPa à 1200 hPa
Classe de protection IP	IP-66 conformément à la norme CEI/EN 60529

RÉFÉRENCE	DESCRIPTION
1008122010	TFIE-1 Clavier complet avec 1 touche d'accès programmable
1008122020	TFIE-2 6 touches d'accès programmables et étiquetables
ACCESSOIRES	
1023594100	EGA-1 Capuchon de protection du bouton (10x) pour TFIE/TFIX/EAPII/EAPFX
1023523211	EMMAI-1H Combiné industriel 1 Bouton

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

1023533311	Industriel, 1 Bouton, pour EAPII/TFIE
1023533312	EMMAI-2H Combiné industriel, Compact, Waterproof pour EAPII/TFIE
1008140100	TA-10 Panneau de connexion avec des sorties de relais pour TFIE/EAPII
1008140225	TA-22b 10m cable and plugbox w/PTT pour casque audio industriel (pour TFIE)
1008140230	TA-23 Combiné marine/industriel w/PTT (pour TFIE)
1008140250	TA-25 Lot de vis de rechange (M6) pour TFIE/TFIX/EAPII/EAPFX
1008140260	TA-26 Lot de passes-câbles pour TFIE/EAPII
AK5850HS	A-Kabel TwinCom Headband Headset ATEX

ÉLECTRIQUE

Connecteur Ethernet	2x RJ45
Options d'alimentation	PoE ou alimentation externe
PoE (Power over Ethernet)	Standard IEEE 802.3af, Classe 0 (de 0,44 W à 12,95 W)
Alimentation auxiliaire DC	24 VDC nom (de 16 à 48 VDC)
Consommation	De 2 W (veille) à 12,9 W (max)
Switch intégré	Managed, DHCP, pare-

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

	feu
Compatibilité	SIP, AlphaCom™, Pulse™, G.711, G.722, G.729, Qualité de voix HD
Microphone à main	Microphone (entrée symétrique), PTT (Push-To-Talk)
Combiné	Microphone (entrée symétrique), haut-parleur (entrée symétrique), + PTT (Push-To-Talk)
Casque	Microphone (entrée symétrique), haut-parleur (entrée symétrique) + PTT (Push-To-Talk)
Entrées/sorties numériques	6 (configurables comme entrées, sortie ou driver de LED)
Sorties relais	2 (250 VAC/200 VDC, 2 A, 60 W, opérations 10^8)
Audio	Entrée ligne, sortie ligne
Alimentation auxiliaire	1 (raccordement sans outils)

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

RÉSEAUX ET PROTOCOLES

Ethernet	10BASE-TX, 100BASE-TX , Négociation automatique, MDIX automatique
Protocoles	IPv4 (avec DiffServ), SIP, TCP, UDP, HTTPS, TFTP, RTP, DHCP, SNMP, CCoIP® Vingtor-Stentofon, NTP
Protocoles LAN	Power over Ethernet (IEEE 802.3 a-f) Network Access Control (IEEE 802.1x)
Gestion et exploitation	HTTP/HTTPS (configuration web) DHCP et IP fixe + Vingtor-Stentofon Pulse™ Mises à niveau logicielles automatiques à distance, gestion centralisée
Fonctions de supervision avancées	Ex : test réseau, test tonalité, rapport statut
Support SIP	RFC 3261 (Standard SIP de base)
	RFC 3515 (SIP refer)
	RFC 2976 (SIP info)
Support DTMF	RFC 2833, 2976 (SIP info)

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

CONFORMITÉ	
Immunité	EN 60945, EN 50130-4, EN 61000-6-1, EN 61000-6-2, FCC- 47 partie 15B
Émission	EN 60945, EN 50130-4, EN 61000-6-3, EN 61000-6-4, FCC- 47 partie 15B
Certifications	UL 60950-1, cUL 60950-1, CB conformément à la norme CEI 60950-1

Accessoires



EMMAI-2H

Microphone à main industriel compact pour Exigo / Turbine

Référence Produit: 1023533312



TA-23

Combiné industriel avec PTT pour poste Turbine

Référence Produit: 1008140230



AK5850HS

Casque approuvé ATEX

Référence Produit: AK5850HS



AK5850HS

Casque approuvé ATEX

Référence Produit: AK5850BS

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



AK5850HS

Casque approuvé ATEX

Référence Produit:
AK5850BHS



TA-22B

Industrial Plugbox & Cable for Headset with PTT


Référence Produit:
1008140225



TA-10

Module de relais

Référence Produit:
1008140100



EGA-1

Button Protection Covers

Référence Produit:
1023594100

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.