

2310601025

**170170-00**

Dual face Slave Clock, TC-M




## Description

- ✓ The housing is an anodized aluminum profile with a front cover of plexiglas
- ✓ It is generally for recessed wall / surface-mounting
- ✓ DCF format with time zone adjustment
- ✓ 2 wire bus connection w/ power and serial time code

The analogue clock for wired DCF Time-Code from Marine Master Clock provides the possibility to create a time distribution system, with high accuracy and high reliability. The clock is intended for connection to a 2-wire bus which combines power supply and serial Time-Code A built in microprocessor receives the Time Code, reads the position of the hands, and sets the clock to correct time. The Time-Code, built up according to the DCF-format, contains information about year, month, day hour and minute. At each minute shift seconds are synchronised as well. The transmission speed is 1 bit/second. 24VDC power supply for the built in electronics is combined with the Time-Code. The clock is intended for time zone adjustment from a Marine master clock.

## Technical Dimensions

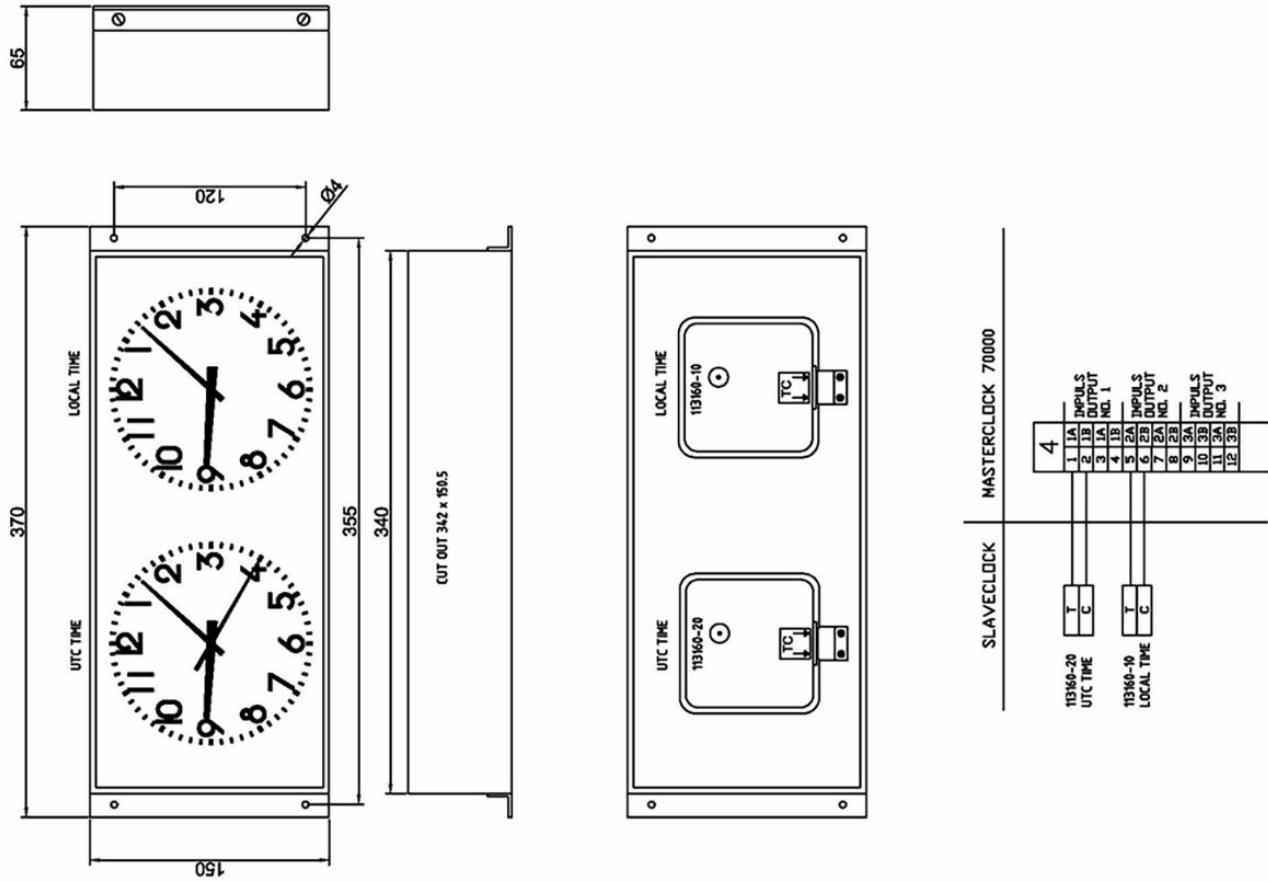

# Specifications

## GENERAL

Mounting	Surface mounting
Housing / Colour	Anodized silver profile with a front cover of plexiglas
Colour	Aluminium, white face, black hands, numerals and marks
Dimensions (mm)	370W x 150H x 65D
Connection	2 wire
Connection voltage	24VDC combined with serial Time-Code
Type of time code	DCF-format with Time zone adjustment.
Microcontroller	PIC16F628
Temperature range	-20°C to +50°C
Power consumption	30 mA
Ingress protection	IP20

## PRODUCT VARIANTS

2310601026	Dual face Slave Clock, Local/UTC, NTP PoE
------------	---

## Used With

page 3/4



**Marine Master Clock**

**70000**

123378-01 Marine Master  
Clock 70000

**Marine Master Clock**

**with Network Time**

**Server, 70000L**

123378-11 Marine Master  
Clock 70000L With Network  
Time Server

page 4/4