

1007042000

Wall Master Station

Display



Description

- ✓ Fully equipped analogue master station with free access to all extensions and features
- ✓ Eight freely programmable single touch keys
- ✓ 2 x 16 character alphanumeric display
- ✓ Conformity with the latest Vingtor-Stentofon station design with rugged front plate in anodized brushed aluminium and silicone rubber keypad
- ✓ Private / Open switch
- ✓ Red 'microphone live' lamp
- ✓ Built-in 63 Ohm / 1 W loudspeaker
- ✓ Adjustable loudspeaker volume
- ✓ Excellent sound quality

The 7042 station is a fully equipped analogue master station with free access to all extensions and features. The station includes programmable single touch keys and a 2 x 16 character alphanumeric display providing caller identification, on-line help and a directory service amongst other features.

This master station is designed for both flush and surface mounting; in- and on-wall back boxes are available for this purpose. The station can also be flush mounted into a desk.


Typical application areas are hospitals, airports, stores and warehouses, factory shop floors and nurseries. A modular jack plug on the station facilitates quick and easy connection. A CAT3 or higher, or a 2-pair 0.5 mm² twisted telephone cable is required between the exchange and the station. The maximum distance is 1.4 km with 0.5 mm² cable. Longer distances are possible by using heavier wires.

The station is equipped with a sensitive electret microphone and a 1 W loudspeaker. The loudspeaker volume is easily adjustable on the station front.

See also: [additional documentation on wiki.zenitel.com](http://wiki.zenitel.com)

Technical Dimensions

Cut out hole when
mounting without bacbox

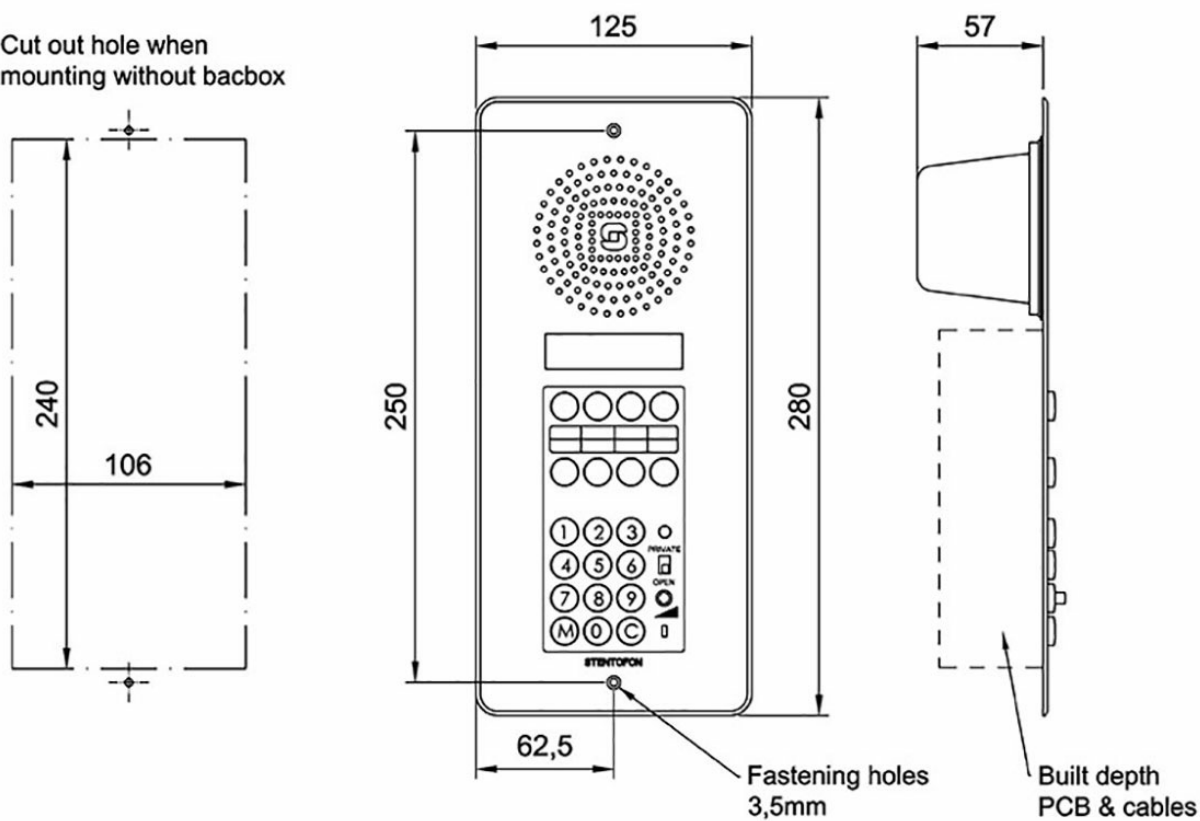

Related item:
Flush mount back box
100602000

Surface Back Box
1000603000

Specifications

MECHANICAL

Operation Voltage	Powered from exchange
Cable Requirements	2 pair twisted cable. 0.5 mm ² / 24 AWG
Temperature Range	0o C to +40o C
Humidity Range	10% - 85% RH (non condensing)
Dimensions: (WxHxD)	125 mm x 280 mm x 53 mm
Finish	Anodized brushed aluminium
Loudspeaker Output	1 W
Loudspeaker Imp	63 Ohm

TITTEL

Frequency Range	300 - 5000 Hz
Loudspeaker Sound Pressure Level	75 dB @ 1 KHz, 2.5 VRMS on ab-wire, 100 m 0.5 mm ² cable
Connector Type	RJ45 Modular Jack
Indicator	LED (red)