

1007040000

Wall Master Station

Standard



Description

- ✓ Fully equipped analogue master station with free access to all extensions and features
- ✓ Conformity with the latest Vingtor-Stentofon station design with rugged front plate in anodized brushed aluminium and silicone rubber keypad
- ✓ Private / Open switch
- ✓ Built-in 63 Ohm / 1 W loudspeaker
- ✓ Adjustable loudspeaker volume
- ✓ Excellent sound quality


The 7040 station is a fully equipped analogue master station with free access to all extensions and features. This master station is designed for both flush and surface mounting; in- and on-wall back boxes are available for this purpose. The station can also be flush mounted into a desk.

Typical application areas are hospitals, airports, stores and warehouses, factory shop floors and nurseries. A modular RJ45 jack plug on the station facilitates quick and easy connection. A CAT3 or higher or a 2-pair 0.5 mm² twisted telephone cable is required between the exchange and the station. The maximum distance is 1.4 km with 0.5 mm² cable. Longer distances are possible by using heavier wires.

The station is equipped with a sensitive electret microphone and a 1 W loudspeaker. The loudspeaker volume is easily adjustable on the station front.

See also: [additional documentation on wiki.zenitel.com](http://wiki.zenitel.com)

Technical Dimensions

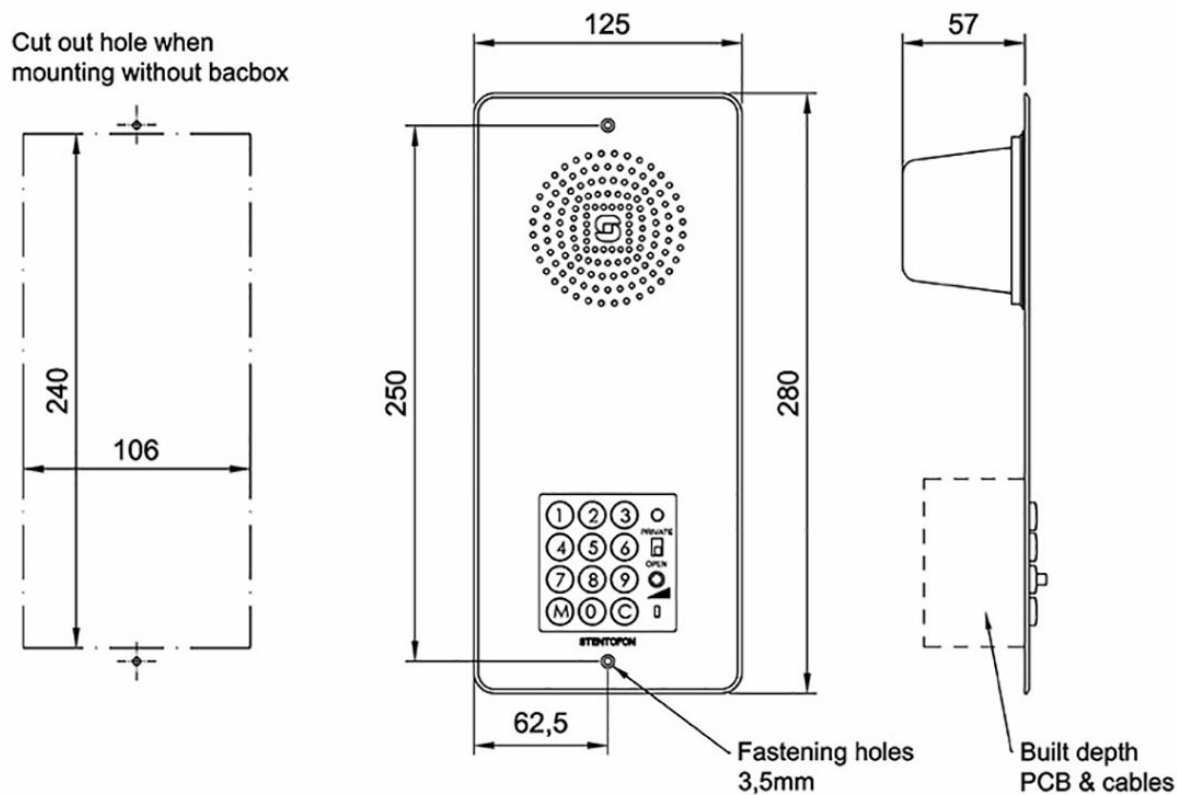

Related item:
Flush mount back box
100602000

Surface Back Box
1000603000

Specifications

MECHANICAL

Operation Voltage	Powered from exchange
Cable Requirements	2 pair twisted cable, 0.5 mm ² / 24 AWG
Temperature	-40oC to +55oC
Relative Humidity	0% - 95%
Dimensions: (WxHxD)	125 mm x 280 mm x 53 mm
Finish	Anodized brushed aluminium
Loudspeaker Output	1 W
Loudspeaker Sound Pressure Level	75 dB @ 1 KHz, 2.5 VRMS on ab-wire, 100 m 0.5 mm ² cable
Connector Type	RJ45 Modular Jack
Indicator	LED (red)