



1008010100

CRM-V-DAK48

48-Key DAK Expansion Module for CRM-V-2



Description

- Extends IP Flush Master Station with 48 programmable DAK keys (direct access keys)
- Ideal for control room applications
- ✓ Visual indications with two LEDs (green/red) per DAK key
- All keys have backlight (adjustable)
- Easy labeling of keys

The IP DAK-48 Unit extends the IP Flush Master Station with DAK buttons and visual indicators (LEDs), providing the perfect solution for the control room.

Each DAK key is equipped with two programmable LED indicators, one red and one green. The LEDs can be used

page 1/4


to show alarms, notifications, call requests, or any other indication required from the system. This opens up for a wide range of integrations and applications such as:

- Advanced call request handling with visual indications
- CCTV and intercom integration
- Opnic group call and PA zone selection
- Simplex (radio) conference with visual indications

The IP DAK-48 Unit is easy to install. The connection between the IP Flush Master and DAK module is completely transparent for the user. When connected, the DAK module acts as an integral part of the IP Flush Master station, giving access to a large number of direct access keys with related LED indicators.

One or two DAK modules can easily be connected to one IP Flush Master, giving a total of 52/100 DAK keys. The module is powered entirely from the IP Flush Master host, and requires no other connections. The IP Flush Master can power up to 2 DAK modules regardless of its own power source (PoE or separate 24 VDC supply).

Technical Dimensions

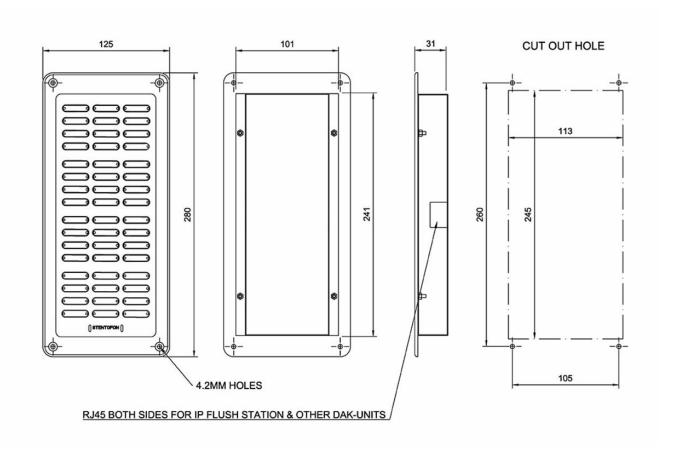

Specifications


SPECIFICATIONS

Dimension (WxHxD): 125 x 280 x 30 mm Weight 0.65 kg Temperature range 0°C to +55°C Power Powered over connection cable from IP Flush Master Station Connectors 3,45, one in and one out Backlight White backlight Installation Master Station and DAK module. 2 modules can be daisy chained (included) Software All software for the DAK module is located in the IP Flush Master Station IP rating IP-32 Certificates UE 60950-1, CUL 60950-1, CUL 60950-1, CB to IEC 60950-1 Certificates 2 Years standard warranty, extendible up to total of 5 years (additional fee)			
Temperature range 0°C to +55°C Power	Dimension (WxHxD):	125 x 280 x 30 mm	
Power Connection cable from IP Flush Master Station Connectors RJ45, one in and one out Backlight White backlight RJ45 terminated cable between IP Flush Master Station and DAK module. 2 modules can be daisy chained (included) Software All software for the DAK module is located in the IP Flush Master Station IP rating IP-32 Certificates UL 60950-1, CB to IEC 60950-1 2 Years standard warranty, extendible up to total of 5 years	Weight	0.65 kg	
Powerconnection cable from IP Flush Master StationConnectorsRJ45, one in and one outBacklightWhite backlightInstallationRJ45 terminated cable between IP Flush Master Station and DAK module. 2 modules can be daisy chained (included)SoftwareAll software for the DAK module is located in the IP Flush Master StationIP ratingIP-32CertificatesUL 60950-1, CUL 60950-1 60950-1Warranty2 Years standard warranty, extendible up to total of 5 years	Temperature range	0°C to +55°C	
Backlight White backlight RJ45 terminated cable between IP Flush Master Station and DAK module. 2 modules can be daisy chained (included) All software for the DAK module is located in the IP Flush Master Station IP rating IP-32 Certificates UL 60950-1, cUL 60950-1 60950-1 2 Years standard warranty, extendible up to total of 5 years	Power	connection cable from	
Installation RJ45 terminated cable between IP Flush Master Station and DAK module. 2 modules can be daisy chained (included) All software for the DAK module is located in the IP Flush Master Station IP rating IP-32 Certificates UL 60950-1, CUL 60950-1, CUL 60950-1 Certificates 2 Years standard warranty, extendible up to total of 5 years	Connectors		
between IP Flush Master Station and DAK module. 2 modules can be daisy chained (included) All software for the DAK module is located in the IP Flush Master Station IP rating IP-32 Certificates UL 60950-1, CUL 60950-1 60950-1 2 Years standard warranty, extendible up to total of 5 years	Backlight	White backlight	
Software module is located in the IP Flush Master Station IP rating IP-32 UL 60950-1, cUL Certificates 60950-1, CB to IEC 60950-1 2 Years standard warranty, extendible up to total of 5 years	Installation	between IP Flush Master Station and DAK module. 2 modules can be daisy chained	
UL 60950-1, cUL 60950-1, CB to IEC 60950-1 2 Years standard warranty, extendible up to total of 5 years	Software	module is located in the	
Certificates 60950-1, CB to IEC 60950-1 2 Years standard warranty, extendible up to total of 5 years	IP rating	IP-32	
Warranty warranty, extendible up to total of 5 years	Certificates	60950-1, CB to IEC	
	Warranty	warranty, extendible up to total of 5 years	

Accessories

page 3/4







Single Desk Stand



Triple Desk Stand

Used With



CRM-V-2

IP Flush Master Station

page 4/4