



3005010149

SPA-M1S-V2

PA Panel For All Call

THIS ITEM IS REPLACED BY 3005010150 - SPA-M1-V2

Description


- PA Panel for single system, all call
- Delivered with gooseneck microphone
- Built-in pre-amplifier with preset signal level and tone controls
- TALK button on panel for All Call message
- Flush mounting, back box for wall mounting is available
- Local mute contact for external loudspeaker (From hardware version 4.0)

This panel gives All Call Message in a SPA-V2 public address and general alarm single system. Installation in consoles or wall indoor.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0 This function must be in combination with relay box.

page 1/3

Technical Dimensions

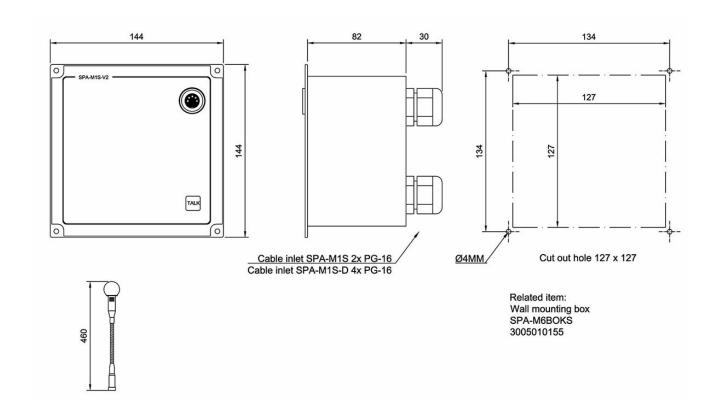


Specifications

GENERAL

Size (WxHxD)	144 x 144 x 82
Weight w/microphone	0. 5 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775mV 0dB
Sensivity microphone	2K / mV
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75mm2
Local mute relay, output	24V DC @ maximum 50 mA
IP-rating	IP-44

Accessories



SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels

page 3/3