

1023200030



## ECPIR-P

### Exigo Call Panel, PTT Button

- ✓ Network access panel for console mounting
- ✓ DSP for acoustic signal processing
- ✓ Communication and Power over Ethernet
- ✓ Indicators for power, call, and fault
- ✓ For single or dual systems (A-B systems)
- ✓ Separate PTT button
- ✓ LED Indicators for power, call, and fault
- ✓ Supports handheld and gooseneck microphones
- ✓ Supports up to four EMBDR-8 expansion modules



EN 54 Certified



UL Certified Intercom



Exigo

## Description

The ECPIR-P is an access panel developed for console mounting and used with Exigo systems. The access panel features one programmable button that can be used to manually initiate announcements, fire alarms, gas alarms, or any other action in the Exigo system.

The access panel can be used with either a handheld PTT microphone or a gooseneck microphone, allowing an operator to make announcements in the Exigo PA/GA system. Automatic gain control and digital audio processing can be used to handle noisy and challenging environments when necessary.


The access panel is fully digital, and connects to the Exigo system over standard Ethernet network cabling. Two monitored Ethernet ports are available in order to facilitate redundant cabling and connection to both the A and B system.

LED indicators on the access panel show the status of the power supply and call activity, and whether a fault is

page 1/7

present in the system.

## Technical Dimensions

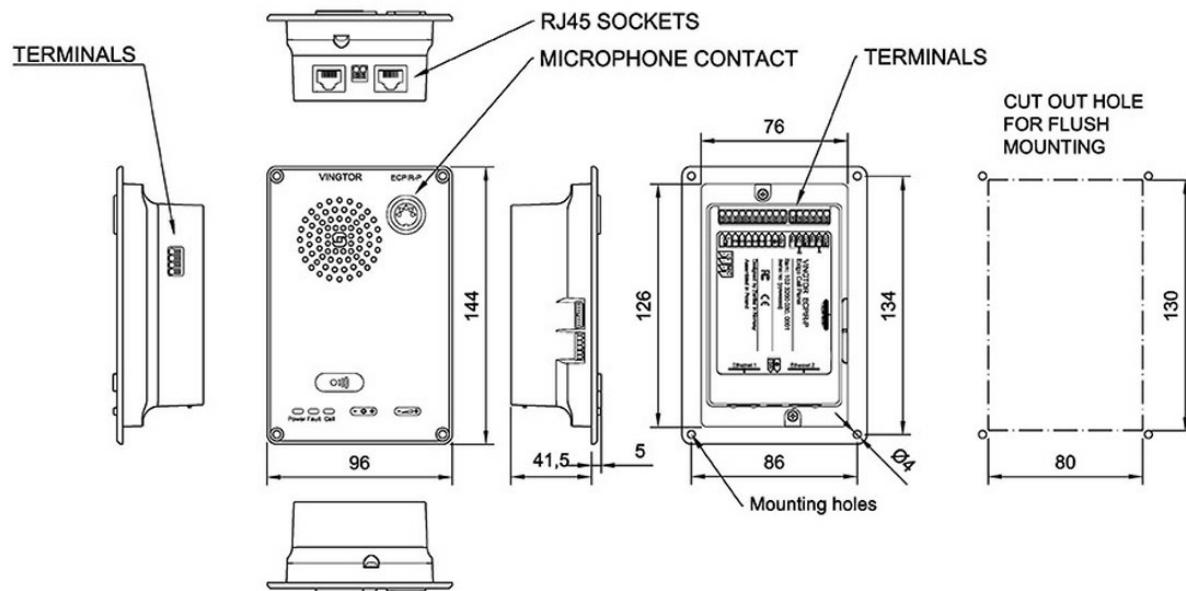

# Specifications

## MECHANICAL

Dimensions (HxDxW):	144 x 96 x 41.5 mm
Weight:	500 g
Mounting:	Flush mount, in-console, desktop or on-wall (requires optional back box EMBR-1)
Color:	Black

## ENVIRONMENTAL

Operating temperature:	-10°C to +60 °C
Operating humidity:	10% to 95% (non-condensing)
Storage temperature:	-40°C to +70°C
Storage humidity:	10% to 95% (non-condensing)
Air pressure:	600 hPa to 1300 hPa
IP Rating:	IP-32
Magnetic Compass Safe Distance	60 cm
IEC 60945 Environmental Category	Protected
Operator & Reading Distance	0,71 m

## ELECTRICAL

PoE	2 x RJ45, Mode A (in-line) or Mode B (spare pair)
Nominal voltage:	According to IEEE 802.3af, class 0
Auxiliary DC power:	V <sub>NOM</sub> = 24 VDC, V <sub>MIN</sub> = 16 VDC, V <sub>MAX</sub> = 48 VDC
Power consumption:	P <sub>NOM</sub> ≤ 2 W (idle), P <sub>MAX</sub> = 8 W
Digital inputs/outputs:	6 (configurable input/output/LED-driving)
Relay outputs:	2 (250VAC/200VDC, 2A, 60W)

## AUDIO INPUT

Pluggable microphone input:	1 x balanced
Frequency response:	80 Hz – 19 kHz
Nominal input level:	1 mVRMS – 100 mVRMS
SNR:	> 80 dB
CMRR:	> 45 dB
Input impedance:	1 kΩ
Input range:	10 mVRMS – 1 VRMS

## AUDIO OUTPUT

Output power:	1 Watt
Frequency response:	100 Hz to 19 kHz ±3 dB
SNR:	80 dB in test-modus, A-weighted
THD+N:	< 1% @ 1 kHz, 8 Ω load
Rated load resistance:	8 Ω

## NETWORKING AND PROTOCOLS

Ethernet	2 x RJ45, 10BASE-TX, 100BASE-TX , Auto negotiation, Auto MDIX
Protocols	IPv4 (with DiffServ), SIP, TCP, UDP, HTTPS, TFTP, RTP, SRTP, DHCP, SNMP, Vingtor-Stentofon CCoIP®, NTP
LAN protocols	Power over Ethernet (IEEE 802.3 a-f) Network Access Control (IEEE 802.1x)
Management and operation	HTTP/HTTPS (Web configuration), DHCP and static IP + Vingtor- Stentofon Pulse™, Remote automatic software upgrade, Centralized monitoring
SIP support	RFC 3261 (SIP base standard) RFC 3515 (SIP refer) RFC 2976 (SIP info), SIP using TLS, RFC 5630 SIPS URI scheme
DTMF support	RFC 2833, 2976 (SIP info)

## CERTIFICATIONS

Immunity:	EN 60945, EN 50130-4, EN 61000-6-1, EN 61000-6-2, EN 55103-2, FCC-47 part 15B
Emissions:	EN 60945, EN 50130-4, EN 61000-6-3, EN 61000-6-4, EN 55103-1, FCC-47 part 15B
Safety:	UL 60950-1, cUL 60950-1, CB to IEC 60950-1

## OTHER SPECIFICATIONS

Warranty	2 Years standard warranty, extendible up to total of 5 years (additional fee)
----------	----------------------------------------------------------------------------------------

## Accessories



PAM1H

Handheld Microphone for  
ECPIR Indoor Access  
Panels / Intercom Stations



MB-30G

Gooseneck Microphone



EBMDR-8

Exigo Button Expansion  
Module, 8 Buttons



EMBR-2

Mounting Box for ECPIR,  
EAPIR and EBMDR-8  
Panels



### EMBR-1

Mounting Box for ECPIR,  
EAPIR and EBMDR-8  
Panels



### EPIPR-6

Exigo Power Injector,  
Spare Pair PoE, 6 Ports



Product image  
not available



Product image  
not available

### Mounting plate for Exigo

#### Access Panels - 2

Mounting plate for 2 pcs.  
Exigo Access Panel, 19"  
4HU

### Mounting plate for Exigo

#### Access Panels - 3

Mounting plate for 3 pcs.  
Exigo Access Panel, 19"  
4HU