

1023303010

EMCG-1

Microphone for Network Loudspeakers



Mì

Automatic Volume

Description


- Oable gland with integrated electret microphone for Exigo Network Loudspeakers
- Listen in to any IP speaker
- Adjust output volume automatically according to the ambient noise level

page 1/3

Specifications

GENERAL

Size	M20
Weight	15g
Color	Light grey RAL 7035
IP grade	IP66
Operating temperature range	-40° to 70° C / -40° to 158 ° F
Storage temperature range	-40° to 70° C / -40° to 158 ° F
Relative humidity	< 95% not condensing
EMC	CE and FCC Part 15
DC Supply Voltage Range	2V (1V ~ 5V)
Sensitivity	-46 dB (+/- 4 dB, 0dB=1V/Pa)
Maximum input Sound level	128dB (SPL)
Typical SNR (A Weighted)	68 dB (1kHz, 1Pa)

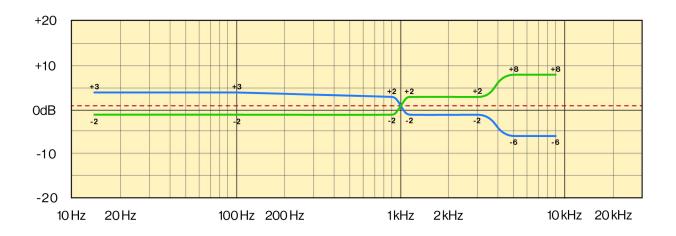

Used With

page 2/3



ELSII-10H

Network Horn Speaker, 10W, Ethernet

page 3/3