


1008095201

IP-LCM-A

IP Line Expansion Module with Inputs/Outputs

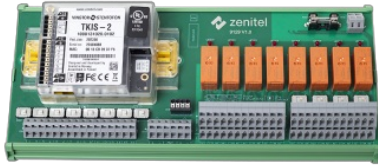

- ✓ 8 relay outputs
- ✓ 8 control inputs
- ✓ Robust push-in connectors for cables up to 1.5 mm²/ 16 AWG (2.5 mm²/ 14 AWG without ferrules)
- ✓ Audio in/out for interfacing to other systems
- ✓ Device powered via the TKIS-2 kit using PoE or local power
- ✓ All TKIS-2 features available



SIP

IC-EDGE

IC-Edge



ICX-AlphaCom



Exigo

Description

The IP-LCM enables easy control of auxiliary devices and integration to other systems

The IP-LCM is an IP Line Expansion module to the TKIS-2 that adds high power relays and robust control inputs to the kit without extra wiring. DIN-rail mounting allows for a flexible I/O device that reduces the amount of wiring for I/O inside racks and other systems. The large robust connectors enables connections to external cabling without adding extra terminals and have been especially chosen to enable quick and easy connection of such systems.

Technical Dimensions

Technical drawing of a building facade. The drawing shows a large window on the left and a door on the right. The window is labeled 'Fenster' and the door is labeled 'Tür'. The drawing includes architectural details such as the window frame, door frame, and surrounding wall structure. Dimensions are indicated by lines and numbers.

Technical drawing of the Zenitel B125 V1.0 device. The drawing shows the front panel with a large terminal block on the left, a control panel with buttons and indicators in the center, and a power section on the right. Dimensions are given in millimeters: height 125.4 [4,94] and width 270 [10,63].

Specifications

MECHANICAL

HxWxD	125.4mm x 270.5mm x 66.6mm
Mounting	Protected area, DIN-Mountable

ENVIROMENTAL

Operational Temperature	-40°C to + 70°C
Storage Temperature	-40°C to + 70°C
Ingress Protection (IP)	N/A
Impact Protection (IK)	N/A

ELECTRICAL (VIA TKIS-2)

Power options	PoE and/or external power supply
PoE (power over Ethernet)	IEEE 802.3af standard, Class 0 (0.44W to 12.95 W)
External power supply	24 VDC (16 – 48 V)
Power consumption	Idle 1.8W, max 12W

CONNECTORS

Control Input	Push in
- without ferrule	0.5mm-2.5mm / 20 AWG - 14 AWG
- with ferrule with plastic/metal collar	0.75mm-1.5mm / 18 AWG - 16 AWG
Output relays	Push in
- without ferrule	0.5mm-2.5mm / 20 AWG - 14 AWG
- with ferrule with plastic/metal collar	0.75mm-1.5mm / 18 AWG - 16 AWG
Ethernet	RJ45
All other connectors on TKIS-2	Tool less, spring loaded, vibration proof terminals

CONTROL OUTPUTS

Number of Control outputs	8
Relay outputs	DPDT (NO, NC, COM)
Switched voltage	< 250VAC Rated (400VAC Max - NOTE! lower rating on Relay 5-8 contact set #1)
Switched Load	< 2000 VA max
Switching Current	< 8A rated (12A max 1s)

CONTROL INPUTS

Robust control input	8
Type	Closing contact or active input
Closing contact / Dry contract	12V
Active input	5Vdc - 48Vdc

GENERAL PURPOSE INPUT OUTPUT

Number	6 (configurable)
Connectors	Tool less, spring loaded, vibration proof terminals
Output	12mA as LED drivers

AUDIO LINE INPUT

Nominal input level	1 VRMS
Input impedance	10 kΩ
Frequency response	200 Hz to 18 kHz ±3 dB

AUDIO LINE OUTPUT

Nominal output level	1 VRMS
Frequency response	200 Hz to 18 kHz ±3 dB

Used With



TKIS-2 Audio Intercom Kit

VoIP Intercom Module