

3006102002

## A-100DC

Electronic Alarm 24V DC



- ✓ Automatic synchronisation on multi-sounder system.
- ✓ Continuously rated.
- ✓ Stainless steel fixings.
- ✓ Duplicate cable terminations (in & out for daisy-chain installations).
- ✓ Signal device do have the possibility for many different tones.
- ✓ To be wall-mounted in noisy areas like engine room etc.



IP66


## Description

The A100 is a compact, high output, 104dB(A) alarm sounder. Low current consumption and high SPL in a robust fire retardant housing ensure the A100 is suitable for all general signalling applications including fire, security and process control.


## Technical Dimensions

□

FRONT VIEW

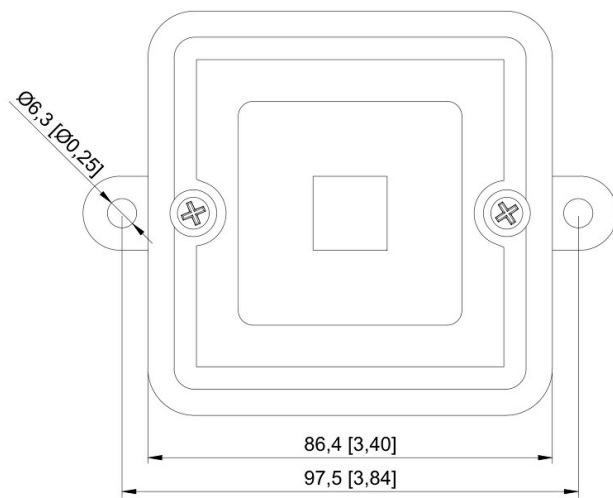

SIDE VIEW

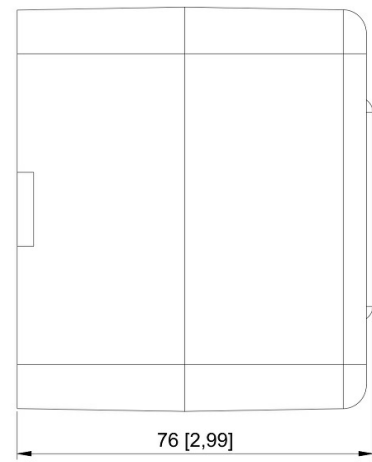

# Specifications

## GENERAL

Operation voltage	12-24V DC
Maximum output	104dB(A) @ 1 metre [95dB(A) @ 10ft/3m]
Rated current	25mA
IP-class	IP66
Terminals	0.5 to 1.5mm <sup>2</sup> cables
Cable entries	3 x M20 clearance gland entries in side & back
Operating temp	-25°C to +55°C
Humidity	0-90% at 50°C
Housing	High impact UL94 V0 & 5VA FR ABS
Weight	0.26 kg
Dimensions	86x77 mm
Environmental Condition	Exposed