



2340220015

L-101-230Y

Xenon Strobes 230VAC, IP66, Yellow

- ✓ Pluggable terminals.
- ✓ In and out terminals.
- ✓ Multiple, user selectable flash rates.
- ✓ User replaceable Xenon tube lamp.
- ✓ Can be stacked to create multi-signal units.



IP66


Description

The L-101-230Y is a compact, robust 5 Joule Xenon strobe beacon ideal for all general signalling applications including fire, security and process control. Features an automatically synchronised flash rate of 1Hz (60 flashes per minute).

Also available in following colors:

- ✓ 2340220013 - L-101-230R Xenon Strobe, 230V AC, IP-66 Red
- ✓ 2340220014 - L-101-230A Xenon Strobe, 230V AC, IP-66 Amber
- ✓ 2340220015 - L-101-230Y Xenon Strobe, 230V AC, IP-66 Yellow
- ✓ 2340220016 - L-101-230G Xenon Strobe, 230V AC, IP-66 Green
- ✓ 2340220017 - L-101-230B Xenon Strobe, 230V AC, IP-66 Blue

Technical Dimensions

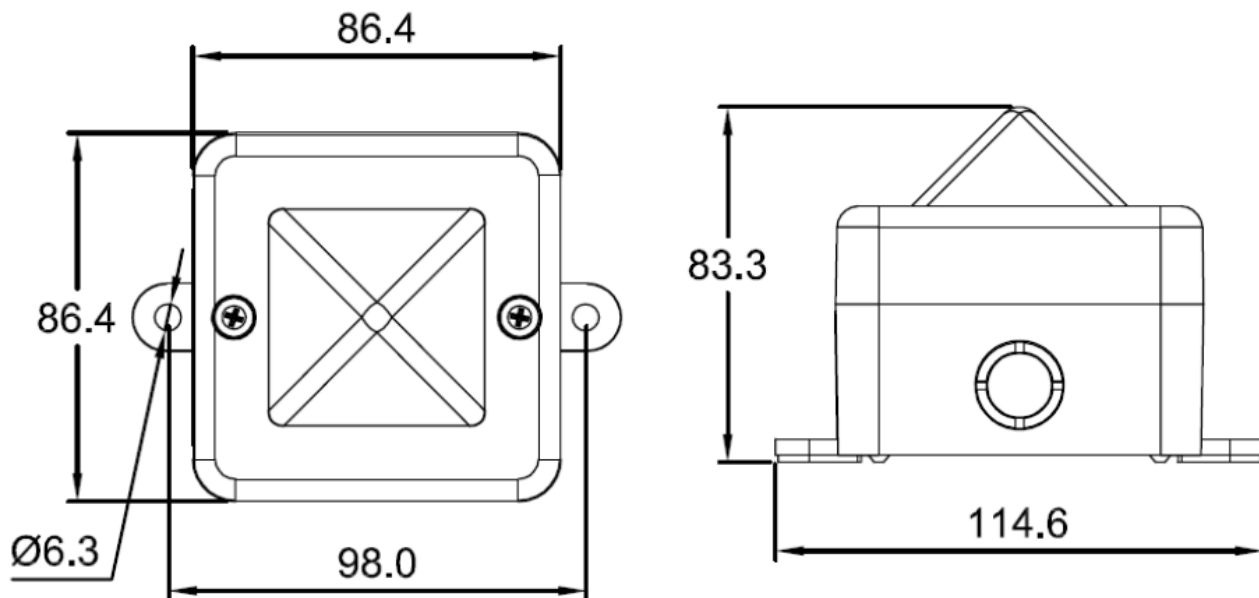

Specifications

GENERAL

| | |
|---------------------------|---|
| Dimension (HxWxD) (mm) | 86 x 86 x 83 |
| Weight | 0.20 kg |
| Energy | 5 Joules (5Ws) |
| Flash rate | 1 Hz |
| Terminals | 0.5 to 4 mm ² cables |
| Lens Colours | Red, Amber, Yellow, Green, Blue, Clear |
| Tube life | 70% after 8000000 flashes |
| IP | IP-66 |
| Operative temperature | -25 °C to +55 °C |
| Relative humidity | 90% at 20 °C |

| | | |
|------------------|-----------------------|--------------------|
| VERSION: | VOLTAGE RANGE: | CURRENT MA: |
| 230 VAC 50/60 Hz | +/-10% | 35 mA |

| ITEM NUMBER | DESCRIPTION |
|--------------------|--|
| 2340220013 | L-101-230R Xenon Strobe, 230V AC, IP-66 Red |
| 2340220014 | L-101-230A Xenon Strobe, 230V AC, IP-66 Amber |
| 2340220015 | L-101-230Y Xenon Strobe, 230V AC, IP-66 Yellow |
| 2340220016 | L-101-230G Xenon Strobe, 230V AC, IP-66 Green |
| 2340220017 | L-101-230B Xenon Strobe, 230V AC, IP-66 Blue |
| 2340220018 | L-101-230C Xenon Strobe, 230V AC, IP-66 Clear |
| ACCESSORIES | |
| 9021903001 | Spare Lens for Beacon L101, Green |