

2310111104

DS-2CD6626B-IZHS

Outdoor Bullet Camera, Anti-Corrosion, 2MP







IP67

Description

The DS-2CD6626B-IZHS is a 2 Megapixel outdoor network bullet camera,

- ✓ Up to 1920*1080 @ 60 fps
- ✓ Progressive scan CMOS with smooth and fluent capture for moving object
- ✓ Motorized zooming and auto focus
- ✓ H.265, H.265+, H.264, H.264+
- ✓ Ultra-low light
- ✓ 120dB WDR
- ✓ IR range: up to 80 m for 2.8 – 12mm lens. (Alternative up to 150 m for 8 – 32 mm lens)
- ✓ 316L stainless steel anti-corrosion materials design
- ✓ Anti-corrosion standard: C5-M, NEMA 4X
- ✓ IP67 waterproof and dustproof for wet and watery environment

Technical Dimensions

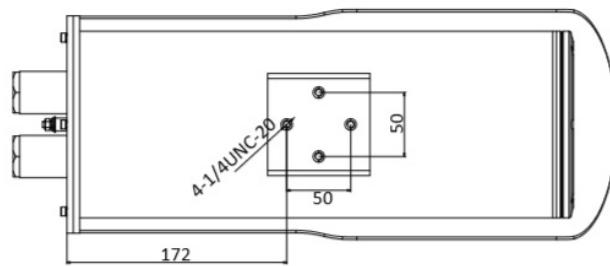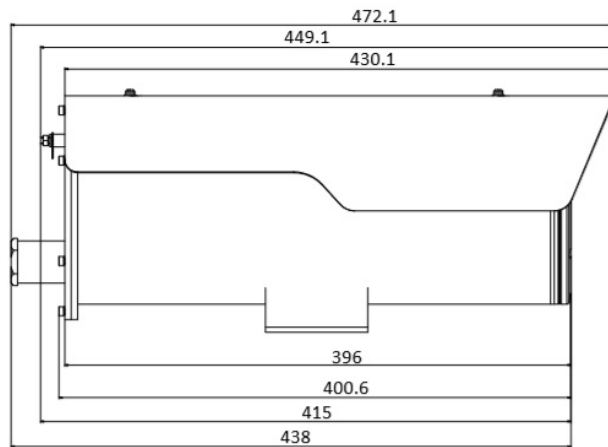

Unit: mm

Specifications

DESCRIPTION

| | |
|-------------------------|--|
| Image Sensor | 1/1.8" Progressive Scan CMOS |
| Signal System | PAL/NTSC |
| Min. Illumination | 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| Shutter time | 1 s – 1/100,000 s |
| Slow shutter | Yes |
| Lens | 2.8 – 12 mm, F1.4: horizontal field of view, 90.1° to 31°; 8 – 32 mm, F1.4: horizontal field of view, 42.2° to 13.5°; Motorized zooming and auto focus |
| Day& Night | IR Cut Filter |
| Wide Dynamic Range | 120 dB |
| Digital noise reduction | 3D DNR |
| Video Compression | H.265+/H.265/H.264+/H.264/MJPEG |
| H.264 code profile | Baseline profile/main profile/high profile |
| Video bit rate | 32Kbps~16Mbps |
| Audio Compression | G.711/G.722.1/G.726/MP2L2/PCM |
| Audio bit rate | 64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-192Kbps(MP2L2) |
| Triple Streams | Support |
| Max. Image Resolution | 1920 x 1080 |
| Frame Rate | 50Hz: 50fps (1920 x 1080, 1280 x 960, 1280 x 720); 60Hz: 60fps (1920 x 1080, 1280 x 960, 1280 x 720) |

| | |
|-------------------|--|
| Sub Stream | 50Hz: 25fps (704 × 576, 640 × 480, 352 × 288, 320 × 240); 60Hz: 30fps (704 × 480, 640 × 480, 352 × 240, 320 × 240) |
| Third Stream | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288, 320 × 240); 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240, 320 × 240) |
| Image Enhancement | BLC/HLC/3D DNR/Defog/EIS |
| Image Settings | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser |
| Target Cropping | Support |
| ROI | Support 4 customized region for each stream, and face dynamic tracking |
| Day/Night Switch | Auto/Schedule/Triggere d by Alarm In |
| Network Storage | microSD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR |
| Alarm Trigger | Motion detection, tampering alarm, HDD full, HDD error, network disconnected, IP address conflicted, illegal login |
| Protocols | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP. IGMP. 802.1X. |

| | |
|-----------------------------|---|
| | ONVIF, RTSP, HTTP, QoS, IPv6, UDP, Bonjour |
| General Function | One-key reset, anti-flicker, three streams, heartbeat, password protection, privacy mask, watermark, IP address filter |
| System Compatibility | ONVIF (Profile S, Profile G), ISAPI |
| Communication Interface | RJ45 10M/100M/1000M self-adaptive Ethernet port |
| Audio | 1 input, 1 output |
| Alarm | 1 input, 1 output |
| Video Output | 1Vp-p Composite Output (75 Ω, BNC) |
| On-board storage | Built-in Micro SD/SDHC/SDXC slot, up to 128 GB |
| Environment Noise Filtering | Support |
| Audio I/O | Support |
| Audio Sampling Rate | 16kHz/32kHz/44.1kHz/48kHz |
| Smart Feature-set | Behavior Analysis, Line Crossing Detection, Intrusion Detection, Region Entrance/Exiting, Unattended Baggage, Object Removal, Exception Detections, Recognition |
| IR Range | 2.8 – 12 mm lens: up to 80m; 8 – 32 mm lens: up to 150m |
| Operation Condition | -40 °C to + 60 °C, Humidity 95% (non-condensing) |
| Power Supply | AC24V, 1.7A, terminal block |

| | |
|-------------------|-------------------|
| Power Consumption | Max. 40 W |
| Weather Proof | IP67 |
| Dimensions | 472 × 180 × 190mm |
| Weight | 9.75kg |

OTHER MODELS

| | |
|------------|---------------------------------|
| 2310111105 | DS-2CD6626B-IZHRS with wiper |
|------------|---------------------------------|

ACCESSORIES

| | |
|------------|---------------------------------|
| 2310111122 | DS-1701ZJ Wall mount bracket |
| 2310111123 | SST 316L Junction box |