zenitel

DATASHEET



4000016789

P-3131

Remote Talkback Master Station

- Complies with IEC 60945 Standard for Marine Equipment
- DNV Type Approval
- CCS Type Approval

Onboard communication

Description

CIS Remote Talkback Master Station P-3131

Streamlined Maritime Communication: The P-3131

The CIS Remote Talkback Master Station P-3131 enhances the Command Intercom System with its watertight design and remote operation capabilities. Designed for seamless integration with the Master Station P-3130, it enables clear communication across 15 substations and direct interaction with Master and Remote Master Stations (type P-3132).

Key features include:

- 15 Substation/Loudspeaker Lines: For extensive communication reach.
- Remote Operation: Communicate directly with the P-3130 and P-3132 units.
- Dedicated Control Outputs: For external call signal devices.
- Flexible Audio Setup: Integrated microphone with connections for handheld microphones and additional external loudspeakers.

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


Practical for various maritime settings, the P-3131 facilitates essential communication functions, including point-to-point, group, and all calls, plus emergency Public Address, requiring an external loudspeaker for optimal operation.

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-08-27 14:58

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

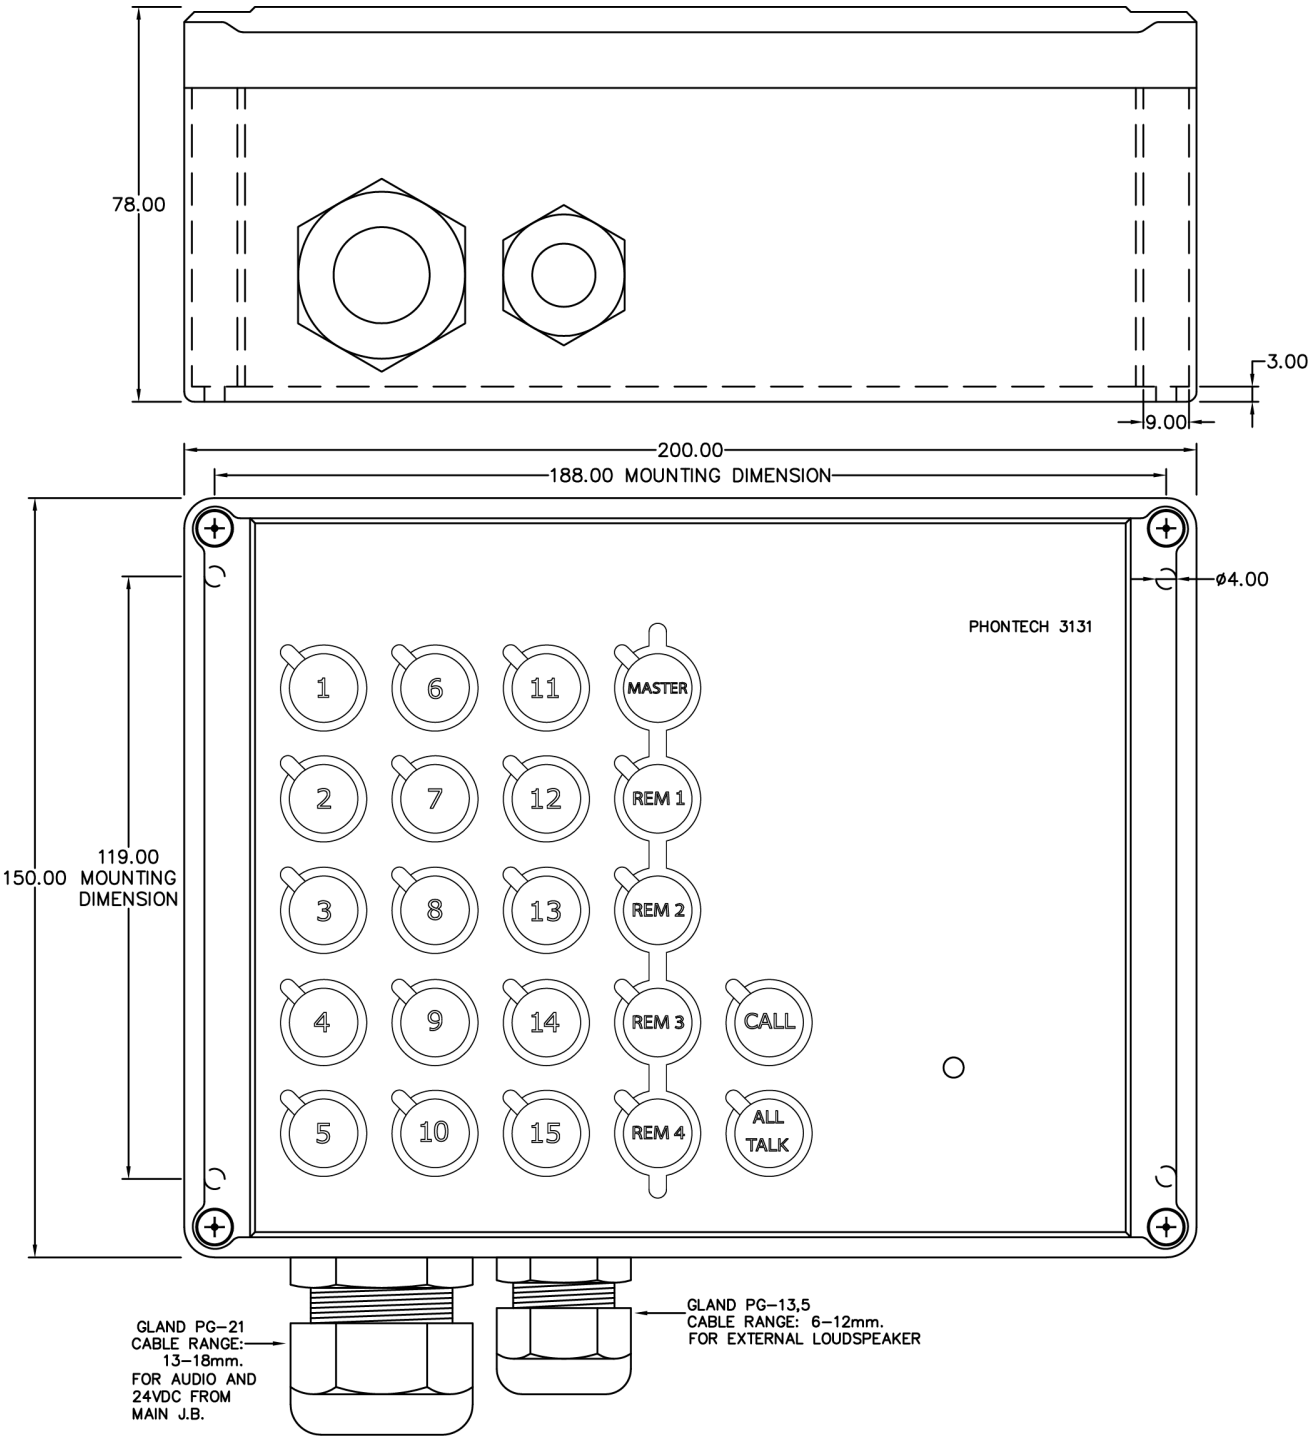

www.zenitel.com info@zenitel.com Last revision date: 2026-08-27 14:58

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

MECHANICAL

Dimensions (WxHxD)	200x150x78 mm
Weight	0.75 kg
Color	RAL 7035/9005
Material	Polycarbonate
Mounting	Bulkhead
Fixing	4 x M4 bolts
Access	Front
Cable Entry	Bottom
Gland Type	1x PG 21 / 1x PG 13.5

ELECTRICAL

Power Supply	24 VDC (22-32 VDC)
Frequency Range	300-3400 Hz
Power Consumption	25W (peak), 3W (typical)
Fuse	5x20 mm, 2A T
Heat Dissipation (typical/max)	< 3W / 10W
Termination	Screw terminals ≤1.5 mm2
Compass Safe Distance	> 5 m

ENVIRONMENTAL

Temperature	-15°C to +55°C
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-55

Accessories

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



VML-1520

Horn Loudspeaker 15W, 20 OHM Waterproof

Item Number: 3006100088



CIS J2-J3 External Microphone Interface adapter

Console mounted plug with terminals for external handheld microphone for CIS P-3100/3101/3102/3130 and P-3132

Item Number: 3005020066



P-9217

Handheld Microphone

Item Number: 4000014199

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.