



4000016785

P-3102

CIS Talkback Master Station

- Complies with IEC 60945 Standard for Marine Equipment
- ONV Type Approval
- CCS Type Approval



Onboard communication

Description CIS Talkback Master Station P-3102

Advanced Maritime Talk Back System: The P-3102

Optimize onboard communication with the CIS Talkback Master Station P-3102, featuring advanced capabilities for managing complex maritime operations. Accommodating up to 20 substations/loudspeaker lines, this system ensures comprehensive coverage and clarity.

Key features include:

- 20 Substation/Loudspeaker Lines: For extensive vessel-wide communication.
- Ax 12W Output Power: Ensures clear audio output, with the option to expand through line amplifiers.
- Versatile Connectivity: Integrated microphone and loudspeaker with additional connections for both gooseneck/handheld microphones and external speakers.


www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

The P-3102 is crafted for enhanced safety and efficiency, offering indispensable point-to-point, group, and all-call options, plus emergency Public Address functions.

Technical Dimensions

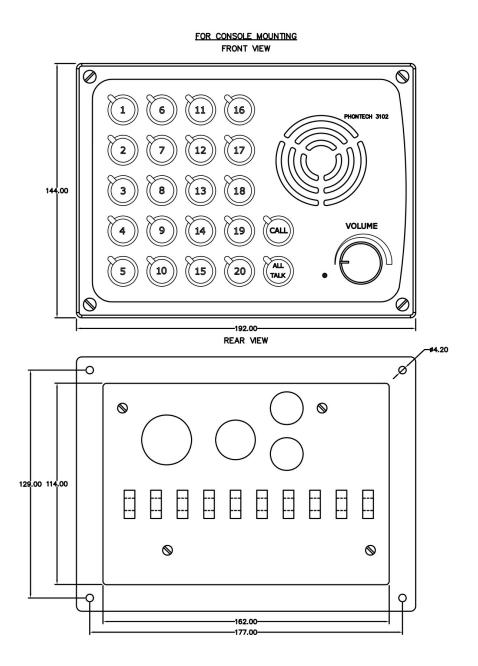

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

Specifications

MECHANICAL

Dimensions (WxHxD)	192x144x100 mm
Weight	3 kg
Color	RAL 9005
Material	Aluminium / PC
Mounting	Flush / Console
Fixing	4 x M4 bolts
Access	Front
Cable Entry	Rear

ELECTRICAL

Power Supply	24 VDC (22-32 VDC)
Power Consumption	85W (peak), 7.5W (typical)
Fuse	5x20 mm, 2A T
Heat Dissipation (typical/max)	< 7.5W / 40W
Termination	Screw terminals ≤ 1.5mm2
Compass Safe Distance	> 2.2 m

AMPLIFIER(S)

Frequency Range	300-3400 Hz
Power Output	4 x 10W / 4Ω (Substation Lines 1-5, 6-10, 11-15 and 16-20)

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ENVIRONMENTAL

Temperature	-15°C to +55°C
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-22

Accessories



Wallbox for CIS (192mm)

Wallbox for CIS Talkback System (144x192mm)



P-9029

Headset with boom mic, headband, and 10m cable



P-9026

Dimmer module for CIS P-31XX Master Stations



DIMMER BOARD FOR CIS 31XX

97301-022



U2410

Foot Switch Indoor Use



Goose Neck Microphone, 60 cm

Additional gooseneck microphone for CIS Talkback Master Stations

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.