zenitel

DATASHEET



4000016759

P-5111H

Telephone for Headset

Description

- Headset interface
- Watertight
- Strong call tone ≥ 95db (A), 1m
- Shock resistant housing
- Complies with IEC 60945 Standard for Marine Equipment
- DNV-GL type approval


The P-5111H is a desk or wall mounted watertight analog telephone for industrial and exposed environments. The telephone is equipped with a headset interface for use in noisy environments.

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2024-12-06 16:42

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

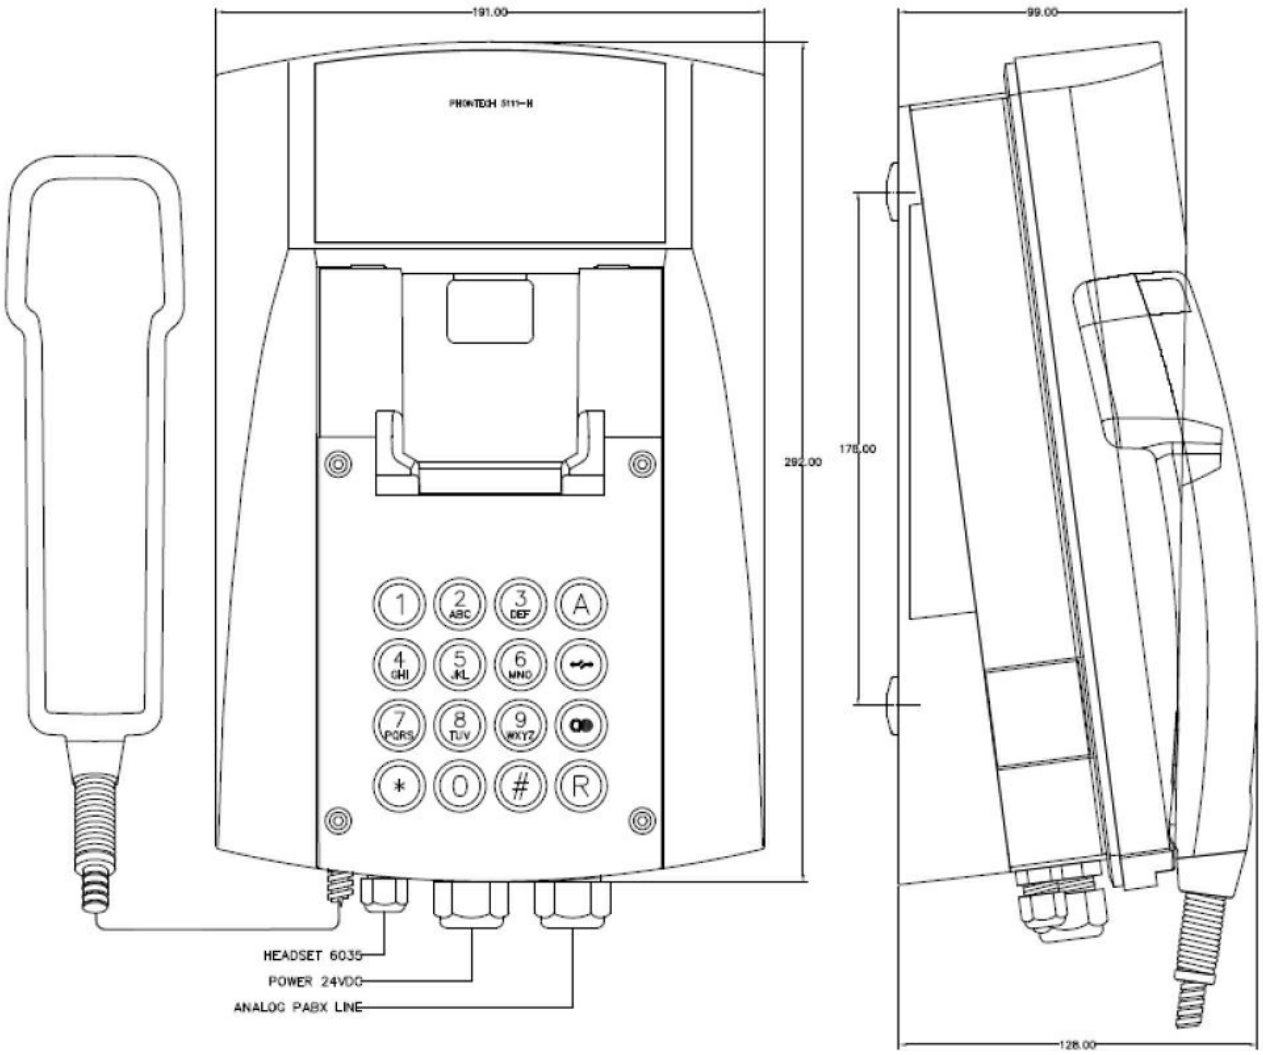

www.zenitel.com info@zenitel.com Last revision date: 2024-12-06 16:42

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

MECHANICAL

Dimensions (WxHxD)	191x317x128 mm
Weight	2.4 kg
Material	Polycarbonate
Color	RAL 9005
Mounting	Desk / Wall
Fixing	4 x M6 bolts
Access	Front
Cable Entry	Bottom
Gland Type	2 x M20, 1 x M20 blind plug, 1 x M12 blind plug

ELECTRICAL

Power Supply	22-32 VDC / 0.5 W
Telephone line feed voltage	24-64 VDC
Ring Voltage / Frequency	30 < R < 90V / 16 < F < 68 Hz
Dial Method	PD (1.5:1 (60/40ms) or 2:1 (66.7/33.3ms)) / DTMF (ITU-T Q23)
Ringing Volume	≥ 95 dB(A) at 1 m distance
Termination	Screw terminals ≤1.5 mm2
Headset Volume	Adjustable up to +20 dB
Compass safe distance	>5 m

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

ENVIRONMENTAL

Temperature	-25°C to +55°C (Storage: -30°C to +70°C)
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-65

www.zenitel.com info@zenitel.com Last revision date: 2024-12-06 16:42

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.