



4000087624 / 4000082999

P-7200


AC/DC & AC/AC LAN Switch

- ✓ 24 Ethernet ports
- ✓ 2 slots for SFP modules
- ✓ Dual redundant power supply
- ✓ 10/100/1000 Mbps (24P)
- ✓ PoE (24 ports)
- ✓ 19" rack mounting
- ✓ Complies with IEC 60945 Standard for Marine Equipment
- ✓ DNV GLtype approval and compatible with NORSOK

Description

The P-7200 AC/DC or AC/AC LAN switch has 24 ports that can all provide Gb ethernet connectivity as well as power for end devices (PoE). In addition, the switch has 2 slots for SFP modules for fiber connectivity providing 26 ports in total. The switch is fully manageable through the web and command line interface.

Technical Dimensions

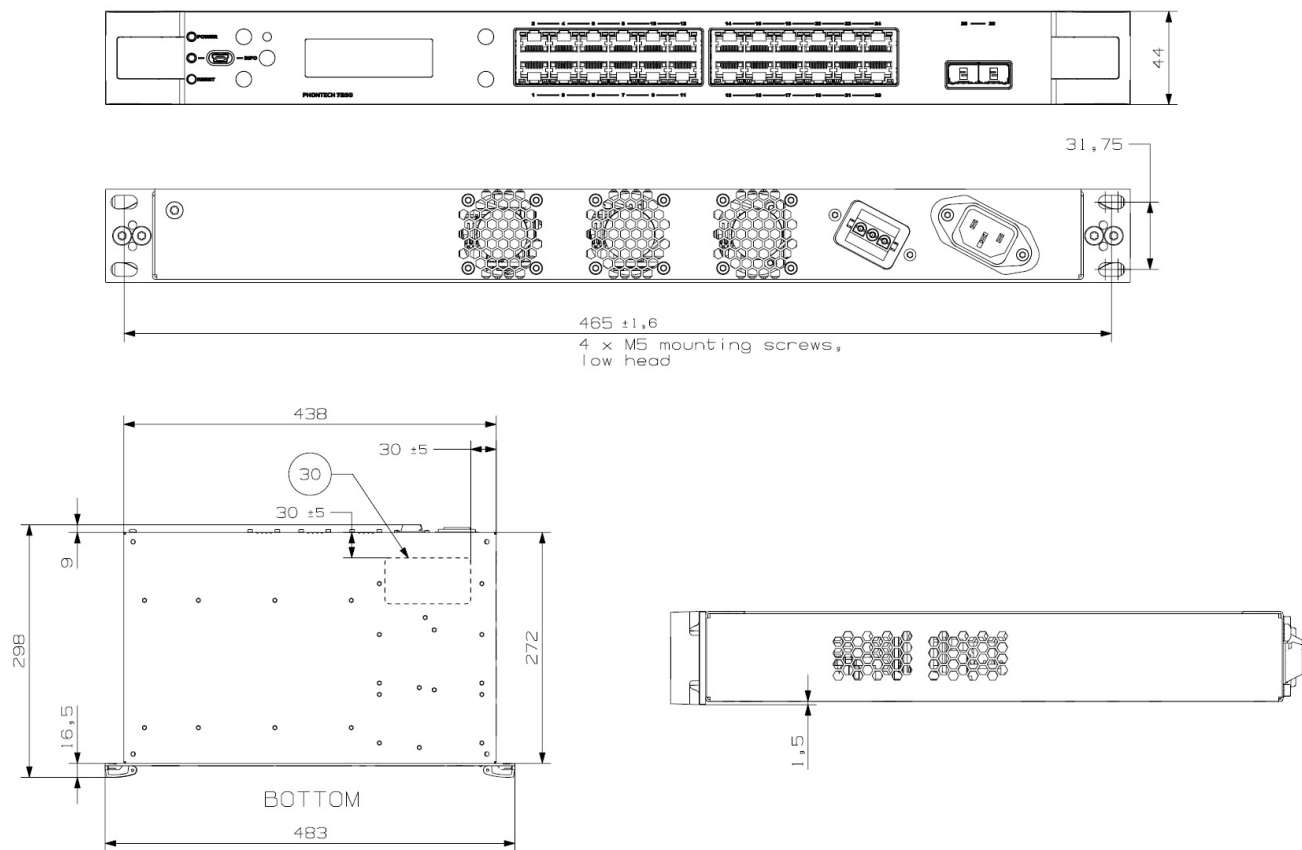

Specifications

MECHANICAL

Dimensions	19", 1U rack mounted, D=272 mm
Weight	3.9 kg
Color	RAL 9005
Material	Steel / Plastic
Mounting	Rack/ Console
Fixing	4 x M5 bolts
Access	Front
Cable Entry	Rear and Front

ELECTRICAL

Power Supply	AC/DC: 90-250 VAC / 20-36 VDC. AC/AC: 90-250 VAC / 90-250 VAC
Output voltage	48VDC (PoE feed)
Power Consumption	225 W (max)
System power consumption	30 W
Heat Dissipation	45 W (max)
PoE power budget	150 W
Compass Safe Distance	<1.7 m

ENVIRONMENTAL

Temperature	-15°C to +55°C
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-20

PORTS

RJ45 Ethernet	10/100/1000:24
SFP	Gigabit2
PoE ports	24

SYSTEM STATUS

Power supply status LED	Primary/Secondary
System status LED	HW/SW status
Per-port LEDs	10/100/1000: PoE, link/activity