



## 4000015353

# P-9010/10

Headset with 10-meter Cable

- Rugged headset for Industrial environments
- ⊘ ON/OFF Switch
- Excellent noise performance
- ✓ High attenuating ear shells
- Permanently connection to the BTS telephone
- I0-meter cable
- Low smoke and halogen free cable
- CENELEC safety standards: EN 60079-0: 2012 + A11: 2013 & EN 60079-11: 2012
- IEC safety standards: IEC 60079-0: 2011, IEC 60079-11: 2011

# Description

P-9010 is a hearing protective headset for use together with Batteryless Telephone System (Sound Powered Telephones) in noisy environments. P-9010 is equipped with high attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort.

P-9010's microphone is a quick positioning noise cancelling boom microphone.


# **Technical Dimensions**

#### www.zenitel.com

#### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

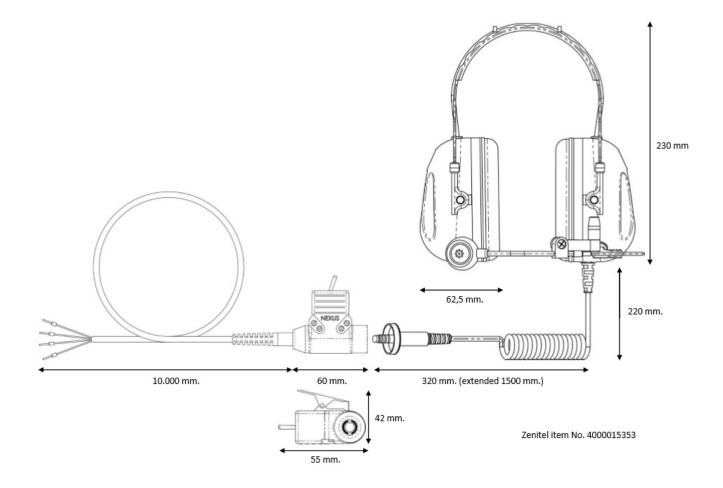

### www.zenitel.com

### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

# Specifications

CABLE	10M FLEXIBLE DURABLE CABLE
Mechanical	
Dimensions (HxD)	Approximately 230x125 mm
Weight	339 g without cable, 375 g with cable

## ELECTRICAL

Termination	Flying leads
Microphone	Dynamic, Noise Cancelling, -57+/-3dB (0dB=1V/pa 1 kHz), nom 230Ω. Frequency response: 50Hz-6KHz, 27 mm diameter.
Earphone	150Ω+/-15%, 124dB+/-3dB, 600-1200Hz

### ENVIRONMENTAL

Temperature	-30°C to +60°C
Humidity	<90% humidity, -20-+50°C
Ingress Protection Rating	IP-54
Attenuation Rating (HML)	H=31dB / M=26dB / L=20dB
Attenuation Rating (SNR)	29 dB

**ORDER NUMBER** 

## DESCRIPTION

4000017145

P-9010/15 Headset, 15m cable

### page 3/3

### www.zenitel.com

### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.