

1023533013

## PAM2H

Handheld Microphone for SPA-V2 indoor panels.



- ✓ Handheld microphone for SPA-V2 indoor microphone panels.
- ✓ Bracket included
- ✓ Push-To-Talk button
- ✓ 1.5 m durable spiral cable
- ✓ Equipped with locking DIN plug
- ✓ Dynamic microphone
- ✓ Unidirectional noise cancelling
- ✓ Rugged brass housing
- ✓ Very long life switching contacts



Onboard communication


## Description

The PAM2H handheld microphone is designed for indoor use, even in noisy areas with unidirectional noise cancelling. The microphone is used on all SPA-V2 microphone panels and features a PTT button. For correct operation and performance speaking distance approximate 2cm.



*Microphone will also be suitable for our legacy ETB and CTB Talk Back systems replacing ETC-1-TB.*

## Technical Dimensions

page 1/4

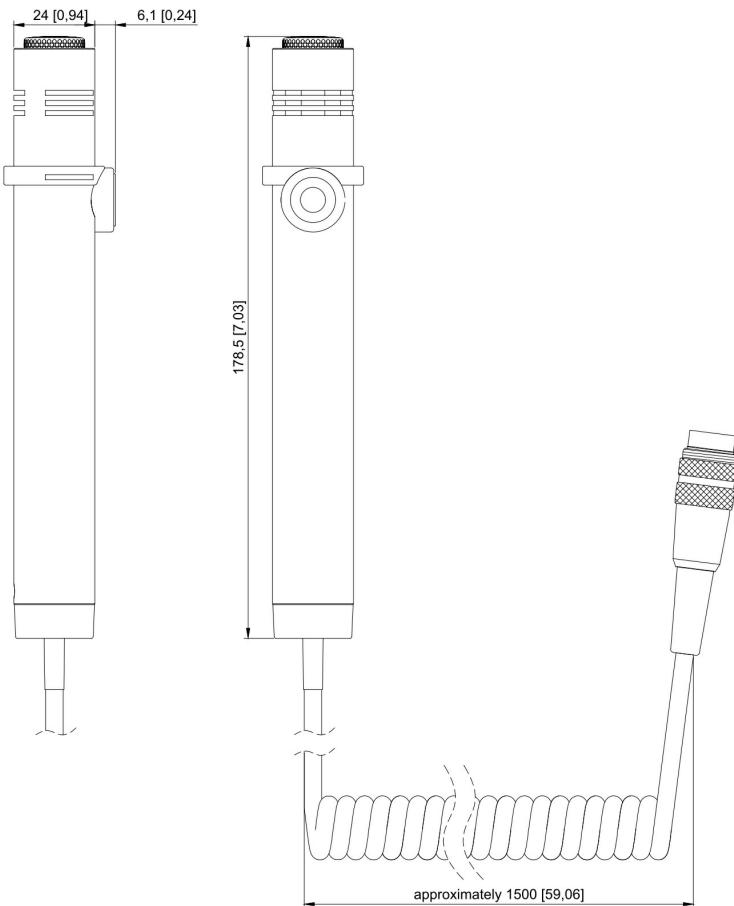

Microphone clip holder:

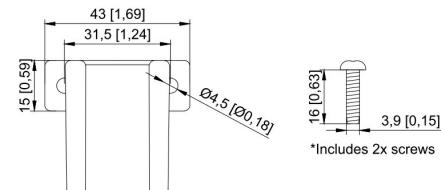

16 [0.63]  
3.9 [0.15]  
\*Includes 2x screws

# Specifications

ITEM NUMBER	DESCRIPTION
1023533013	PAM2H Handheld PA microphone, 1 button, indoor, w/bracket. Dynamic

## MECHANICAL

Dimensions	Length 178 mm, Head Ø 29 mm, Body Ø 24 mm
Weight	0.23 kg
Cable	4-wire halogen free spiral cable, 2 Wires shielded, Draw length max. 1.5 m, without connector
Material	Brass. Black
Bracket	Included

## ELECTRICAL

Microphone	Dynamic and Noise Cancelling
Frequency range	150 Hz to 12 kHz at -10 dB
Sensitivity	1 mV/Pa (-60 dBV/Pa ± 3 dB)
Impedance	200 Ω ± 20 % at 1 kHz
Directivity	Cardioid (at 1 kHz; 180° - 20 dB)

## ENVIRONMENTAL

Operating Temperature	-20 °C to +60 °C
Storage Temperature	-30 °C to +70 °C
Humidity	10% to 95% (non-condensing)
Environmental Condition	Protected

## COMPATIBLE EQUIPMENT

SPA-V2 Indoor panels

## Accessories



Product image  
not available

### ETC-1-CH

Chassis Contact 5-pin DIN for  
ETC-1-TB with 1M cable

### ETC-1/CABLE

Extension cable 10M w/ 5-pin  
DIN plug for handheld  
microphone

## Used With



SPA-M6-V2



SPA-M6-D



SPA-M1-V2



SPA-M1-D

page 4/4