

2970000051

UPS-XPC-1000-120R

Rack mount online UPS, 1000W/30 min, 120V, wo/ rails



- ✓ Auto restart
- ✓ 99% efficient operation
- ✓ Smart LCD display
- ✓ Programmable receptacle group
- ✓ Temperature compensation
- ✓ Hot swappable battery
- ✓ Extended battery runtimes
- ✓ Maintenance bypass
- ✓ 4HU
- ✓ Minimum cabinet depth: 600mm

Description

The P80 is a true online UPS that delivers continuous, high quality AC power to servers and network equipment with no break when transferring to battery. The P80 offers the lowest total cost of ownership by cutting energy costs and lowering heat output.





- ✓ Available models: P80-1500, 2200, 3000
- ✓ Pure sine wave output
- ✓ Extended battery runtimes with optional matching battery modules
- ✓ UL, cUL, RoHS

Item 2970000131, consists of:

- ✓ UPS P80-1500, 1500VA/1350W 120V (2U)
- ✓ Extended Battery pack P90-BP48 (2U)

**Note: Rails not included. Two Rail kits (2970000130) needed for P80-1500, P80-2200, P80-3000*

Technical Dimensions

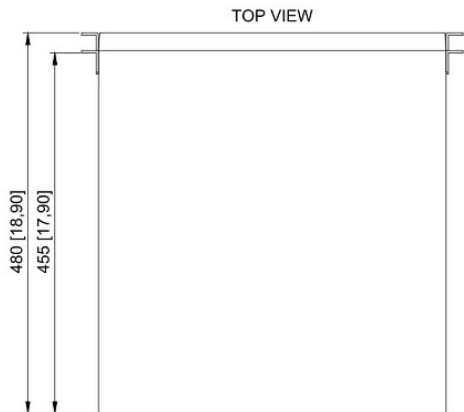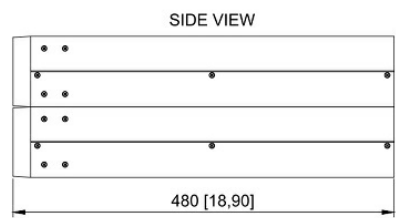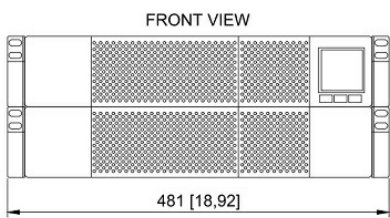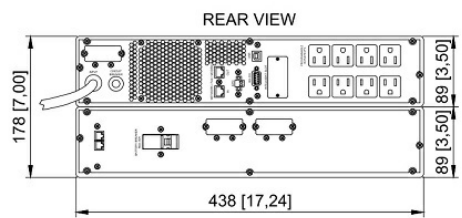

Specifications

GENERAL

| | |
|------------------------------------|---|
| Power rating | 1500VA (1350W) |
| Input Voltage Nominal/Frequency | 120VAC; 50/60Hz auto-sensing |
| Output Voltage | 120VAC nominal (110/115/127 selectable) |
| Harmonic distortion | 2% @ 100% linear load; 5% @ 100% non-linear load |
| Efficiency | Up to 99% ECO mode, 95% buck and boost mode |
| UPS, Dimensions (W x D x H) | 17.2 x 18.9 x 3.5 in |
| UPS, Weight | 44.7 lbs |
| Battery Type (included) | Up to 30 minutes |
| Battery, Dimensions (W x D x H) | 17.2 x 18.9 x 3.5 in |
| Battery, Weight | 74.6 lbs |

ACCESSORIES

| | |
|------------|--|
| 2970000130 | 4-Post Rail Kit for use with P80-1500, P80-2200, P80-3000 |
|------------|--|

Accessories



UPS-XPC-CARD

Dry Contact Interface Card