

3006102014

BEXS-110DC

EX Alarm Horn 24VDC 110DB, IP66/67



IP66



IP67



Atex


Description

- ✓ Sound level outputs of up to 117dB(A) at 1 metre
- ✓ 32 alarm tones and 3 remotely selectable stages.
- ✓ Marine grade, corrosion proof, LM6 aluminium enclosure.
- ✓ Ingress protection IP66/67
- ✓ Stainless steel fixings
- ✓ Stopping plug included.
- ✓ Automatic synchronisation on multi-sounder system.

The flameproof BExS110 alarm sounders are suitable for Zone 1, 2, 21 & 22 applications. Approved to IECEx, ATEX, Ex EAC and INMETRO standards.

Available options: Voltage: 24V dc, 230V ac

Technical Dimensions

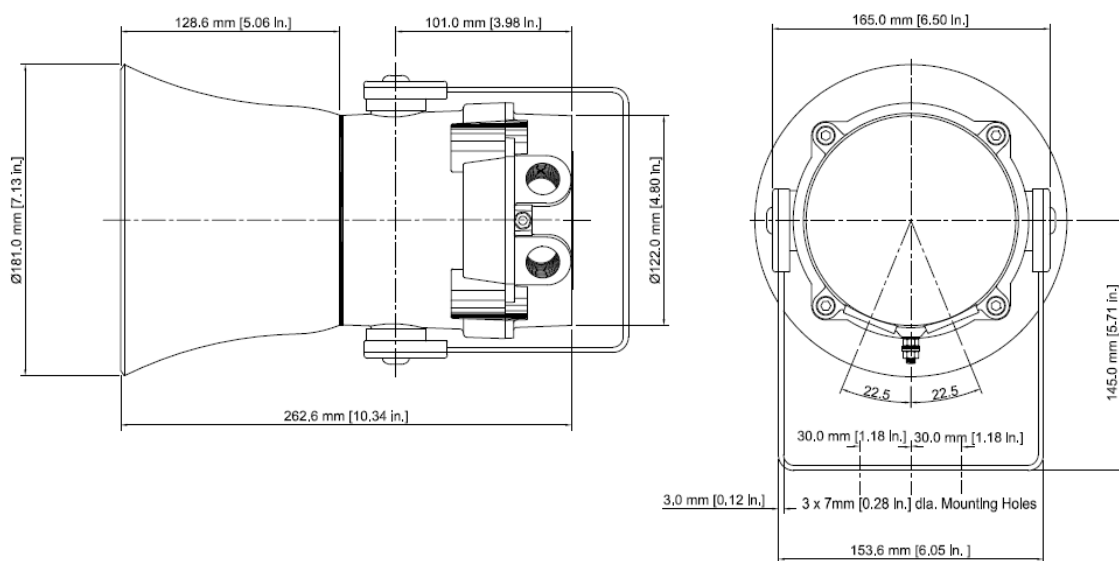

Specifications

GENERAL

Maximum output	117dB(A) @ 1 metre [108dB(A) @ 10ft/3m]
Nominal output	110dB(A) @ 1m +/- 3dB - Tone 2 [101dB(A) @ 10ft/3m]
No. of tones	32 (UKOOA / PFEER compliant)
No. of stages	3
Volume control	Max. 110dB(A); Min. 72dB(A) - Tone 2
Effective range	100m/328ft @ 1KHz
Ingress protection	IP66/67
Cable entries	Dual M20 ISO (one stopping plug inc) Adaptors to M25, 1/2" & 3/4" NPT can be specified
Terminals	0.5 - 2.5mm ² (20-14 AWG)
Temperature range	-50° to +70°C
Weight	3.00kg

ORDER NUMBER

3006102014	EX ALARM HORN 24VDC 110DB IP66/IP67
3006102013	EX ALARM HORN 230VAC 110DB IP66/IP67