

1020600931

VSP-211-L

Main Station - Batteryless Telephone System - 12-Way



- ✓ 12 extensions selector switch
- ✓ Equipped with the built-in system amplifier w/capacitor battery
- ✓ Terminals for auxiliary 24VDC when used as Common Battery Telephones.
- ✓ To avoid noise problems, the 24VDC must be supplied via a DC / DC converter
- ✓ Flush mounted
- ✓ Wall mounting with corresponding metal cabinet type MBOKS-G
- ✓ Desk mounting with corresponding wooden cabinet type VSPC-OAK
- ✓ Suitable for installation in wheelhouse or control room

 IP44

Description






VSP-211-L Main Station: Batteryless Telephone System

The VSP-211-L main station is part of our 12-way Batteryless telephone system. The 12-Way system consists of up to 12 main stations with selector switch for selective calling between all connected stations.

- ✓ Flush-Mounting or optionally on wall or desk by means of an additional back-box for convenience
- ✓ 12-Position Selector Switch: Facilitates selective calling among all connected stations, ensuring targeted communication.
- ✓ Built-In System Amplifier: Powered by a capacitor battery, it guarantees continuous operation, vital during power outages.

Ideal for strategic installation onboard, the VSP-211-L ensures robust, uninterrupted communication, fulfilling SOLAS requirements for secondary communication systems.

Technical Dimensions

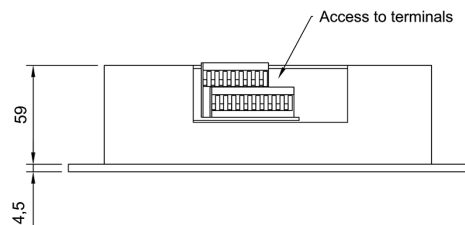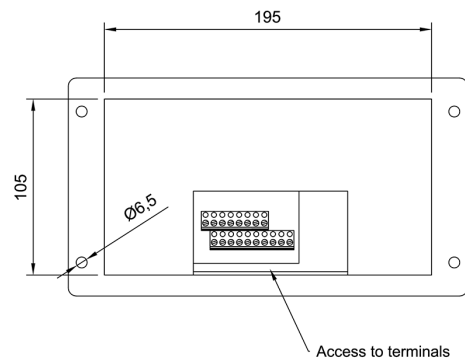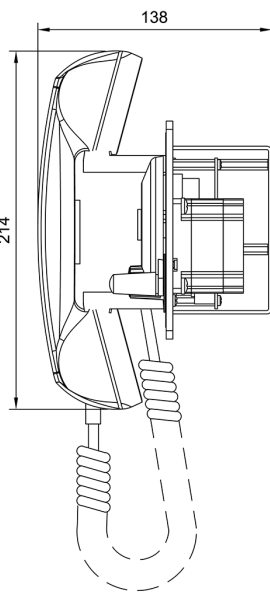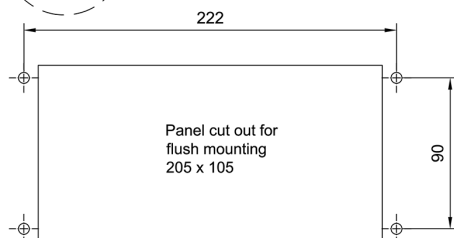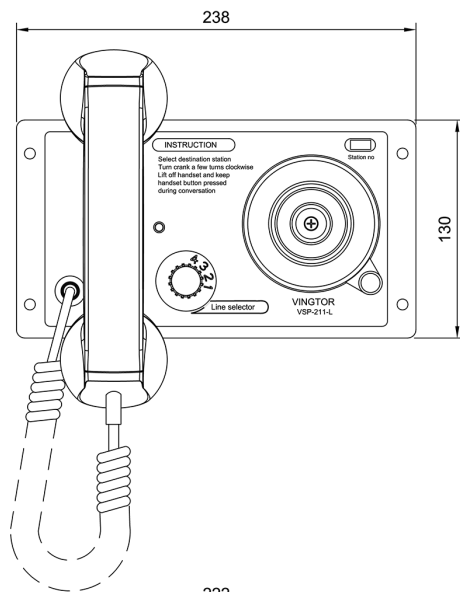

BATTERYLESS TELEPHONE SYSTEM
Main Station Panel Mounted IP-44
Type VSP-211-L Ver.6.0
O.no.1020600931
Dimension & Mounting details









Prepared by	Date	Project no.	Revision by
UT/SEN	01.06.2011		
Approved by	Date	Sheet	Rev.date
		1/1	
Dwg.no. / File			Rev. no.
A100K11075			00

Specifications

GENERAL

Connections	Screw terminals Color
Color	Black
IP rating	IP-44 (in console)
Dimensions (WxHxD)	238 x 205 x 137 mm (w/ handset and built-in depth)
Panel cut-out	205 x 105 mm
Weight	1.30 kg
Operating temperature range	-25°C to 55°C
Compass Safe Distance	> 155cm

Accessories

			
<u>MBOKS-G</u> VSP Batteryless Telephone System	<u>VSPC-OAK</u> Wooden OAK Cabinet	<u>VSP-36-PEL-A</u> Headset with boom mic, headband, and 10m cable	<u>VSP-36-PEL-A/20</u> Headset with boom mic, headband, and 20m cable
			
<u>CD-4</u> Plugbox Waterproof	<u>VSP-36-PELP-A</u> Headset with boom mic, headband, and 10m cable	<u>VSP-36-PELP-A/20</u> Headset with boom mic, headband, and 20m cable	<u>VSP-36-PELP-A/25</u> Headset with boom mic, headband, and 25m cable



IRR-24

Relay Box



IRR-VSP-220

Relay box 220V AC for VSP-12
way