
zenitel

DATASHEET

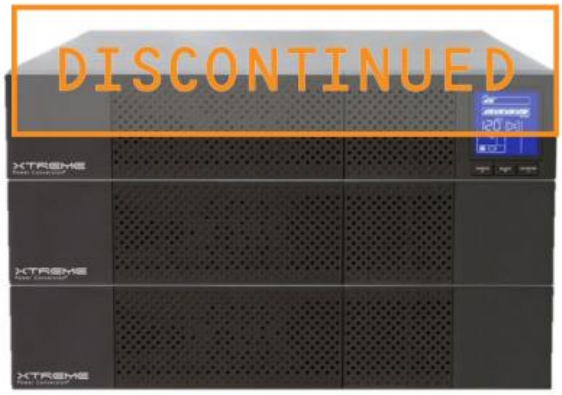

2970000053

UPS-XPC-2700-120R

Rack mount online UPS, 2700W/30 min, 120V, wo/ rails

- Auto restart
- 99% efficient operation
- Smart LCD display
- Programmable receptacle group
- Temperature compensation
- Hot swappable battery
- Extended battery runtimes
- Maintenance bypass
- 6HU
- Minimum cabinet depth: 800mm

Description

The P80 is a true online UPS that delivers continuous, high quality AC power to servers and network equipment with no break when transferring to battery. The P80 offers the lowest total cost of ownership by cutting energy costs and lowering heat output.

- Available models: P80-1500, 2200, 3000
- Pure sine wave output
- Extended battery runtimes with optional matching battery modules
- UL, cUL, RoHS

Item 2970000133, consists of:

- UPS P80-3000, 3000VA/2700W 120V (2U)
- Two Extended Battery packs P90-BP72(2U)


**Note: Rails not included. Two Rail kits (2970000130) needed for P80-1500, P80-2200, P80-3000*

www.zenitel.com info@zenitel.com Last revision date: 2026-04-07 15:27

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Technical Dimensions

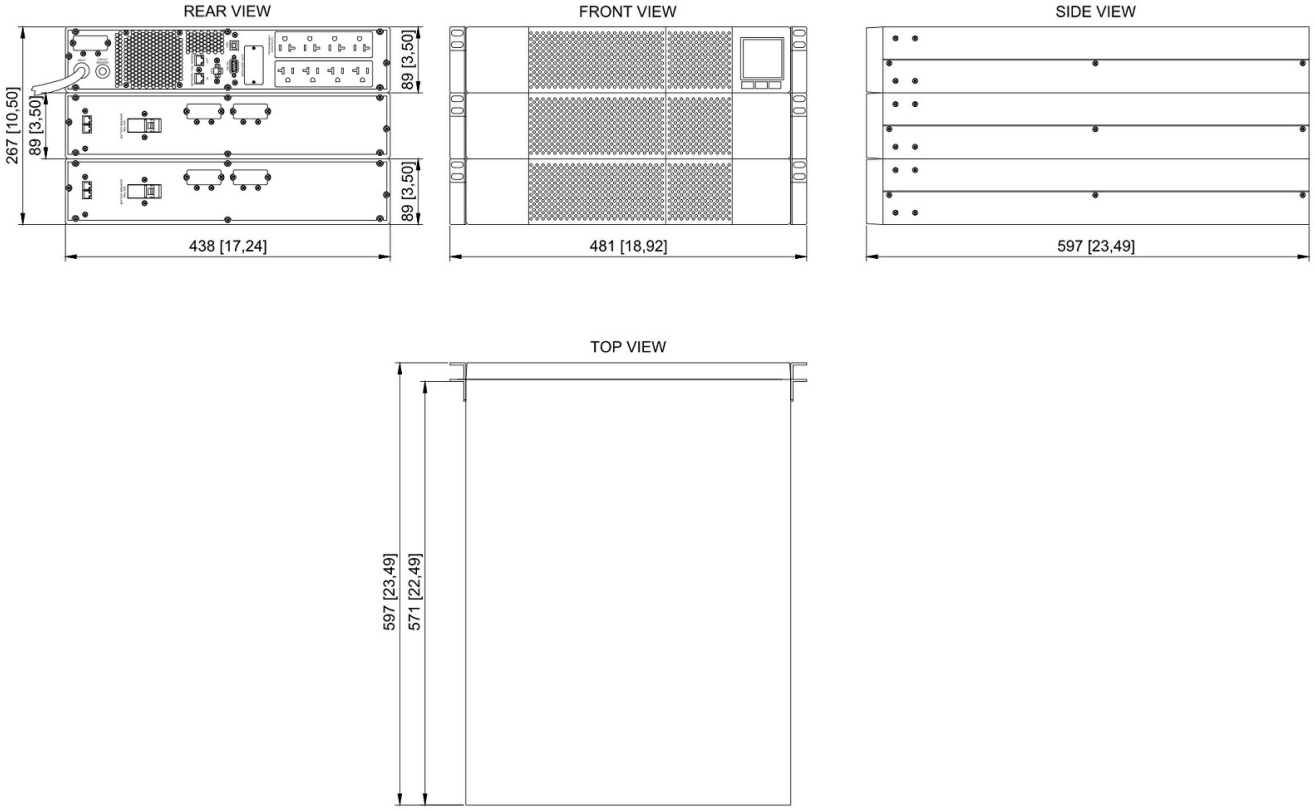

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Power rating	3000VA (2700W)
Input Voltage Nominal/Frequency	120VAC; 50/60Hz auto-sensing
Output Voltage	120VAC nominal (110/115/127 selectable)
Harmonic distortion	2% @ 100% linear load; 5% @ 100% non-linear load
Efficiency	Up to 99% ECO mode, 95% buck and boost mode
UPS, Dimensions (W x D x H)	17.2 x 23.6 x 3.5 in
UPS, Weight	67.1 lbs
Battery Type (included)	Up to 30 minutes
Battery, Dimensions (W x D x H)	17.2 x 23.6 x 3.5 in
Battery, Weight	104.4 lbs

ACCESSORIES	
2970000130	4-Post Rail Kit for use with P80-1500, P80-2200, P80-3000

Accessories

www.zenitel.com info@zenitel.com Last revision date: 2026-04-07 15:27

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



UPS-XPC-CARD

Dry Contact Interface Card

Item Number: 2970000204

www.zenitel.com info@zenitel.com Last revision date: 2026-04-07 15:27

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.