zenitel

DATASHEET




2809016029

# Emergency Communication Wall Unit

1602 Deluxe Wall Unit Slim

*This product is only available in the Americas*

Emergency points

## Description

- Attention-getting LED Blue Light is included and mounted inside a polycarbonate housing. The LED Blue Light is continuously lit and flashes for duration of a call when “EMERGENCY” button is pressed to draw attention to a unit.
- Emergency Phone faceplate is illuminated at all times by an LED Panel Light
- Vandal-resistant marine grade 316 stainless steel construction
- Designed to resist extreme weather conditions
- A variety of signage, graphics, and color choices are available
- ADA-compliant

The emergency/security wall unit is a high visibility, vandal resistant, stainless steel unit designed for use with the Zenitel Emergency/Security Stations. The Emergency/Security Wall Unit can be painted in blue, red and yellow as required.

The wall unit is ideal for use in parking facilities, college campuses, medical centers and multi-building complexes. The wall unit has an integrated blue light encased in Lexan. The blue light is always lit, calling attention to the location of the emergency communication unit. When the intercom station is activated, the light flashes at 78 fpm. The light flashes until either actively terminated by the personnel receiving the call or automatically upon termination of the call itself.

The wall mount is equipped with a concealed LED panel light that continuously illuminates the face of the emergency phone. The wall mount is



www.zenitel.com info@zenitel.com Last revision date: 2025-06-17 11:21

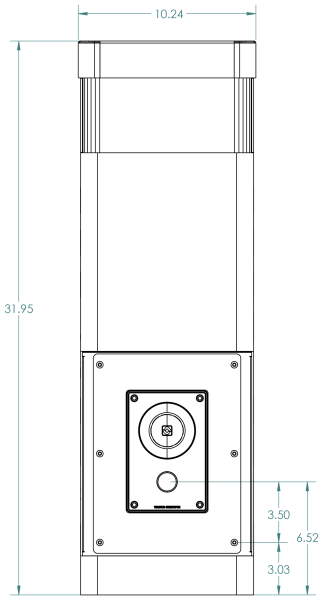
Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

made of a vandal resistant, 12-gauge vertical brushed stainless steel, designed to withstand prolonged exposure to harsh environments.

The Turbine series of stations and the 1600TA Plate with TA-18USA backbox (107216008140) are both ordered separately. See more information on the specifications page for part numbers.

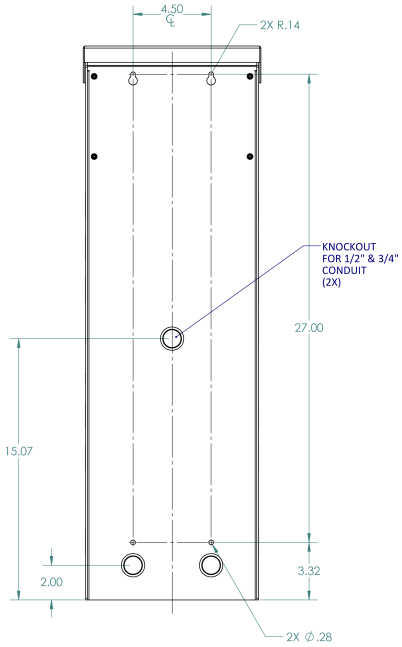
## Technical Dimensions



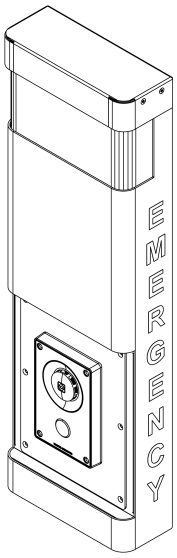

FRONT VIEW



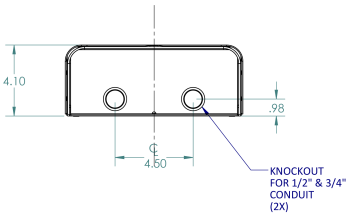

SIDE VIEW




REAR VIEW




ISOMETRIC VIEW




BOTTOM VIEW





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

## Specifications

| | |
|---|---|
| Dimensions | 10 x 32 x 4 in. (253 x 810 x 101 mm) |
| Mount Weight | 23 lbs. (10.4 kg) |
| Construction | Brushed marine grade (316) stainless steel with impact- and UV-resistant polycarbonate lens. |
| Lighting | LED Blue Light: 78 flashes per minute, 70% of initial lumens after 50,000 hours of operation. LED Panel Light: Ultra bright LEDs, 50,000 hour lifetime. |
| Lettering | 2 inch-high reflective red “EMERGENCY” lettering with wide-angle visibility is standard. Also available as “ASSISTANCE”, “INFORMATION”, or custom lettering, colors and graphics. |
| Mounting | Mounts to wall or straps to pole or kiosk. Contact Zenitel for necessary items for pole mounting. |
| Colors | Brushed stainless steel is standard. Available painted in custom colors |
| Power | LED Blue Light: 120VAC, 7.8 Watts, 35A peak inrush. LED Panel Light: 1.2 watts, 12-24 VDC/VAC, 120VAC |

## Used With



www.zenitel.com info@zenitel.com Last revision date: 2025-06-17 11:21

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



TCIS-2 | Audio Intercom

IP and SIP Intercom

Item Number: 1008111020




Turbine Adapter Plate

Item Number: 1072160000




TCIS-C1 | Audio Intercom

IP and SIP Intercom

Item Number: 1008111901





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.