



1023221616

## EAPFX-6-V2

Exigo Industrial Ex Access Panel, 6 Buttons - V2

- ✓ Network access panel for explosive atmospheres
- ✓ Ex mb ib e IIC T4 Gb
- ✓ DSP for acoustic signal processing
- ✓ IP networking and power over Flowire technology
- ✓ Six programmable buttons with individual labels and status indicators
- ✓ Optional button protection covers
- ✓ Indicators for power, call and fault
- ✓ For single or dual systems (A and B systems)



Exigo



IP66



IEC Ex Intercom



Atex




IP over 2-wire

## Description

The EAPFX-6-V2 is the next generation in our Ex access panels. The EAPFX-6-V2 is a rugged call panel, developed for harsh offshore environments and hazardous areas. The antistatic plastic housing withstands corrosion from the most common corrosive gasses and compounds found in this type of environment. The access panel features six fully programmable buttons, which can be used to manually initiate fire alarms, gas alarms or any other action in the Exigo system. The access panel is equipped with indicators to show the status of the power supply, call activity and whether a fault is present in the system. The access panel's buttons features two independent status indicators each, which shows the status of the related button's function. The access panel is fully digital, and connects to the Exigo system over a single-pair cable. The access panel is fully monitored to ensure detection of any fault which may compromise the system's functionality.

## Technical Dimensions

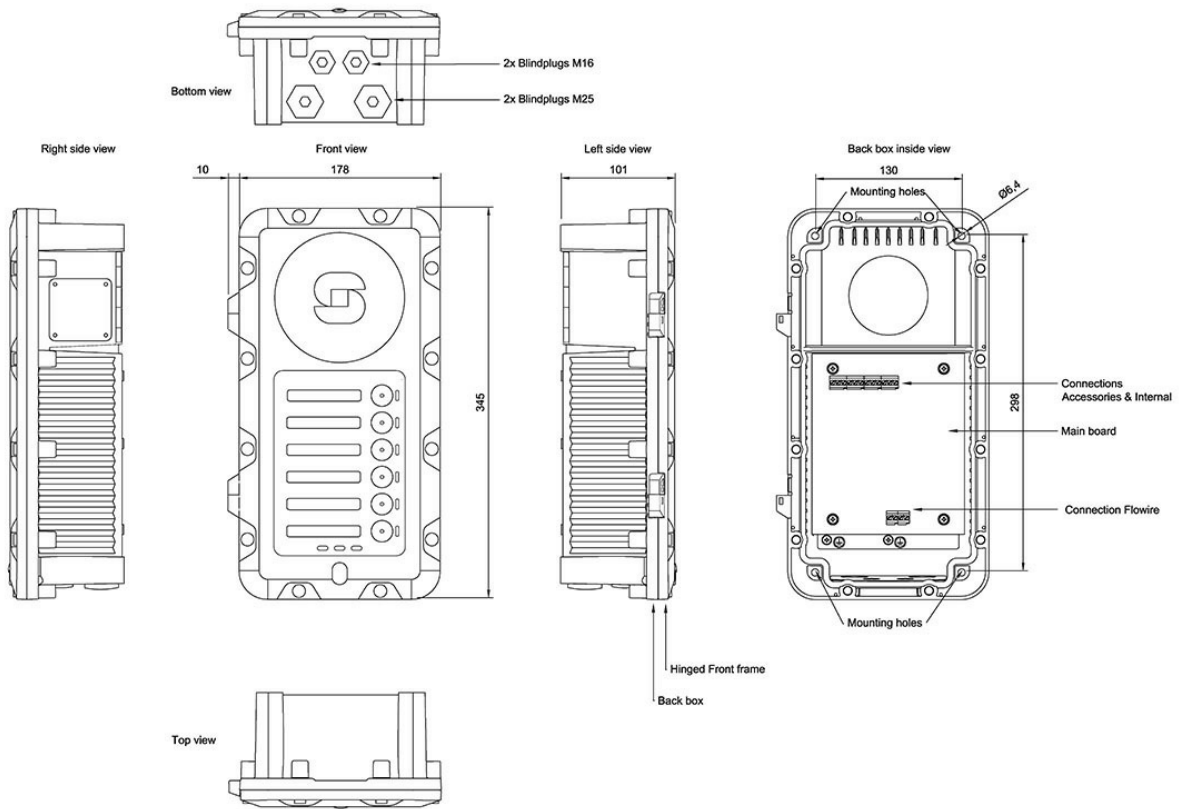

# Specifications

## MECHANICAL

Dimensions (HxWxD):	345 x 178 x 101 mm
Weight:	3.4 kg
Mounting:	On-wall
Color:	Black
Cable entry (default mounted with blindplugs):	2x M25 and 2x M16.
Cable glands (in delivery):	2 pcs. for Ø10-17 mm cables

## ENVIRONMENTAL

Operating temperature:	-20°C to +55 °C
Operating humidity:	10% to 95% (non-condensing)
Storage temperature:	-40°C to +70°C
Storage humidity:	10% to 95% (non-condensing)
IP rating:	IP-66 (IP-64 in accordance with IEC 60079-0)
IK rating:	4J @-20°C
Magnetic Compass Safe Distance	200 cm
IEC 60945 Environmental Category	Exposed
Operator & Reading Distance	0,86m

## ELECTRICAL

Nominal voltage:	24-48 VDC (SELV)
Power consumption:	PNOM = 3 W (idle) PMAX = 8 W

## NETWORK

Flowire	2 x Power line communication
---------	------------------------------

## CERTIFICATIONS

Immunity	EN 60945, EN 50130-4, EN 61000-6-1, EN 61000-6-2, EN 55103-2
Emission	EN 60945, EN 50130-4, EN 61000-6-3, EN 61000-6-4, EN 55103-1
CENELEC safety standards	EN 60079-0:2018, EN 60079-7:2015/A1:2018, EN 60079-11:2012, EN 60079-18:2015/A1:2017
IEC safety standards	IEC 60079-0:2017, IEC 60079-7:2017, IEC 60079-11:2011, IEC 60079-18:2017
Marking	II 2(2) G Ex e ib mb [ib] IIC T4 Gb -20°C ≤ Ta ≤ +55°C

## Accessories



### EMMAX-1H

Handheld Industrial EX  
Microphone For Exigo/Turbine


Item Number: 1023533511



### FCDC3

Flowire Ethernet Converter - DC  
Voltage

Item Number: 1008080310



### EGA-1

Button Protection Covers

Item Number: 1023594100



### TAX-2B

Ex-Approved Plugbox & Cable for Headset with PTT

Item Number: 1008150025