



1020600788

VMP-36-PELP-Ad

Headset with boom mic, headband, and 10m cable

Base product: VMP-36-PELP-A

Includes: 3005020067 - Modification cable kit with diode for [VMP-stations](#) - See the Documents tag for the modification description

- ✓ Portable headset for connection to plugbox CD-7-VMP
- ✓ Switchbox w/ M-button and belt clip
- ✓ Excellent noise performance
- ✓ High attenuating ear shells
- ✓ Standard with 10 meter cable



IP54



Onboard communication

Description

The VMP-36-PELP-A headset brings hearing protection and communication in noisy environments into a new level of performance with newly designed speakers and microphone.

The dual cup give a modern and slim look and is specially designed to provide excellent noise attenuation.

Applications

The VMP-36-PELP-A headset can enhance communication in noisy environments and other workplaces, where the workers need to be connected to their 2-way handheld or fixed systems throughout the day to help facilitate frequent contacts with co-workers.

Functionality (together with VMP station/CD-7-VMP Plugbox)

In the OFF Headset position *on the CD-7-VMP* plugbox the VMP station works as normal. No audio to, and from the headset.

If switched to upwards position (Opposite of OFF Headset) the headset is enabled and a dial tone is heard in the headset. Outwards dialling must be initiated on the VMP station.


When called, the conversation can be answered directly from the headset/plugbox simply by swiching toupwards position.

If the switch somehow is in in the upwards position when a call comes in, the caller will be met by"busy"


Use the headset PTT button (M-button) to talk from the headset when in a conversation. This will autmatically activate simplex mode. Return to duplex mode by briefly reactivating the PTT button.

Switch back to OFF Headset position to terminate the call.

Technical Dimensions

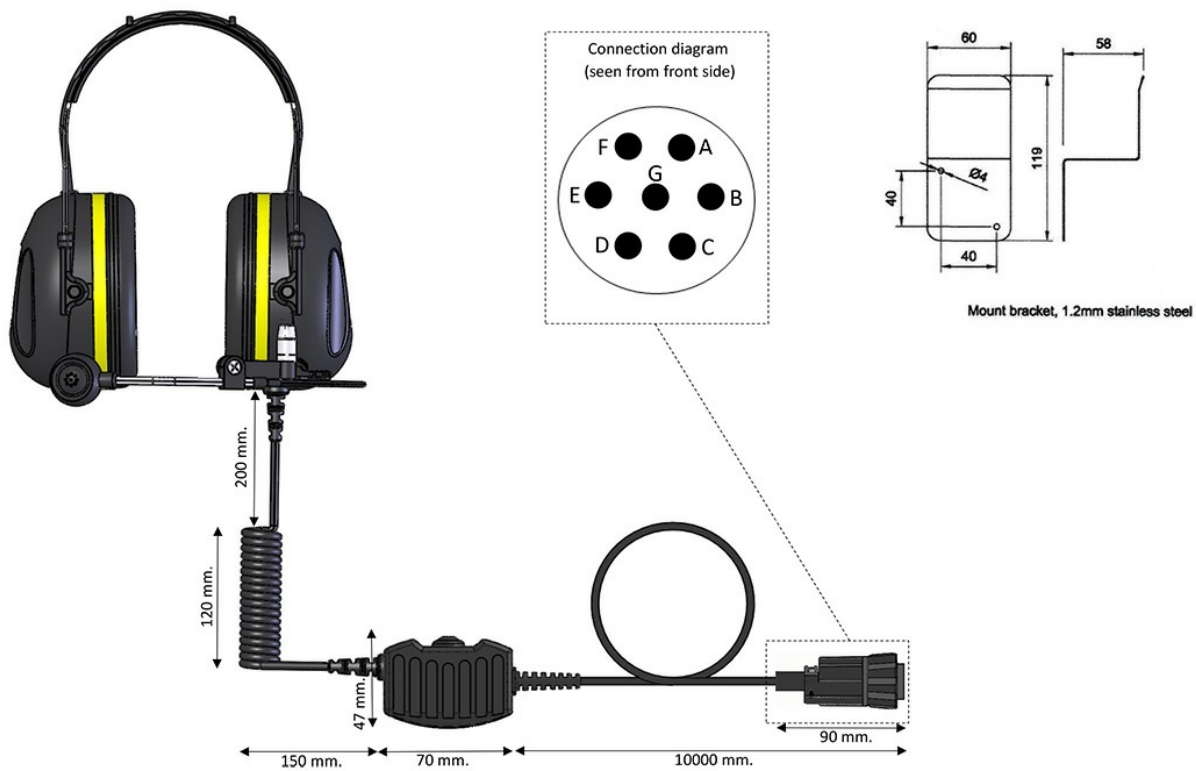


Specifications

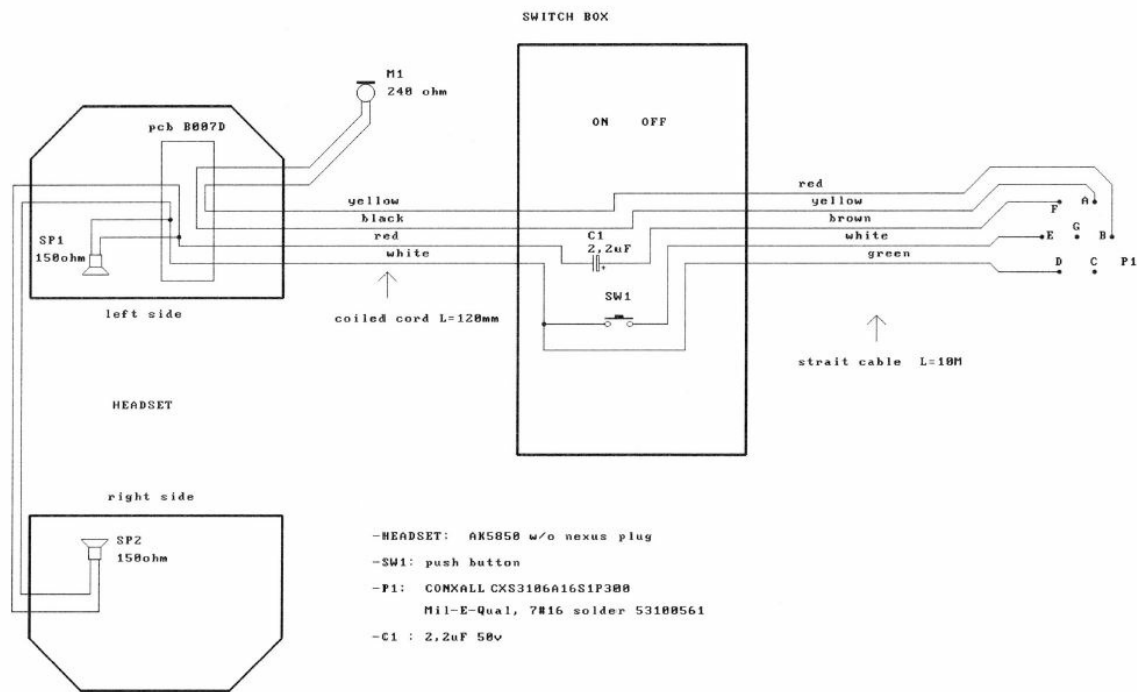

GENERAL

| | |
|--------------------------|---|
| Termination | Conxall, CXS3106A16S1P300, 7 pin (Plug box CD-7) |
| Microphone | 20,5 mm. dynamic noise cancelling, 240 Ohm+- 30 %, sensitivity -57 dB+-3 dB, 0 dB=1v/pa at 1kHz, frequency response: 50Hz-6KHz. |
| Earphone/Speakers | 27 mm. diameter, 150 Ohm+-15 %, Parallell connection, frequency response: 50Hz-10KHz. |
| Temperature | -40 to +60 degrees C |
| Storage Humidity | < 90% |
| Protection | IP-54 (When worn) |
| Attenuation rating (HML) | H=32 dB / M=28 dB / L=20 |
| Attenuation rating (SNR) | 30 dB |
| CE Certificate no. | 12151RHS01 |
| Dimension (HxD) | Approximately 250 x 150 mm. (adjustable). |
| Weight | 0.4 kg |
| Colour | Black/Yellow |
| Manufacturer | Zenitel (A-kabel) |
| Cable | 10m |

Accessories



Hygiene kit for Headset
Hygiene kit for Headset



Spare Boom Microphone for Headset
Spare Boom Microphone for all A-Kabel type Headsets



Headset Stowage Bracket
Headset stowage Bracket for Wall mounting



Spare Switchbox w/cable for VMP-36-PELP-Ad



AK6070T Throat microphone for all A-kabel type Headsets
Dynamic Throat Microphone for Headset

Used With



Light Industrial Master Station



Industrial Master Station
Heavy Duty



CD-7-VMP
Plugbox Waterproof for VMP-36-PELP



VMP-503
Main Station With Loudspeaker



VMP-530

Main Station Waterproof