



2810010115

## CAB42FWD-V2

Floor cabinet 19" 42HU 800x800x2000mm fixed frame

- ✓ Front metal door
- ✓ Front door handle: Double-bit lock
- ✓ Without rear door (available at request)
- ✓ Includes 2x side steel sheet panels
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

## Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. This floor-mounted 42HU cabinet is DNV-GL type approved and it's perfect for installing our 19" system components to create a complete system for your installation.

The cabinet comes with a front metal door that is hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if needed. Cabinet variant 42 HU, 800 wide and 800 deep. Internal 19-inch fixed frame for up to 42 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over modules and terminals. It comes with 3 fixed door plates, front doors, and chassis ground.

By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.


This cabinet is suitable for:

- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN

page 1/5

- CCTV
- IPTV
- DECT
- Paging
- Masterclock
- UPS (small)

## Technical Dimensions

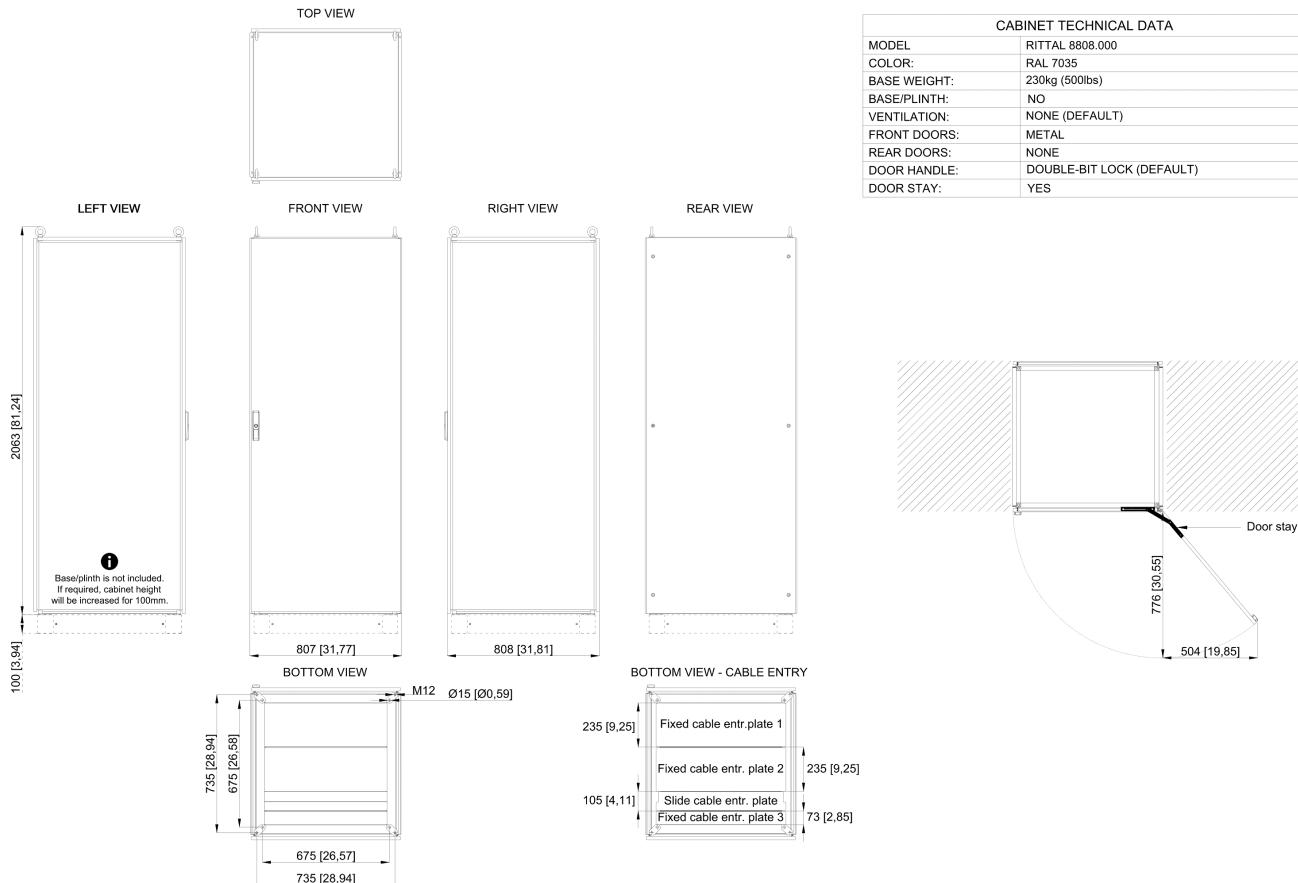

# Specifications

## GENERAL

Dimensions (WxDxH)	807x808x2163 mm
Color	RAL 7035
Material	Steel
Ingress grade	IP-55 (or less, based on selected ventilation)
Mounting	Floor mounted
Cable inlet	Bottom (top available on request)
Environmental Condition	Protected

## Accessories



CAB-DH-K

Door handle with key-lock for CABxx



CAB-DH-P

Door handle with push-button for CABxx



CAB-DH-PP

Door handle with push-button & pad-lock for CABxx



CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable

**CAB-AVIP55-230**

Active ventilation unit IP55 for CABxx, 133mm height, 230VAC

**CAB-AVIP55-115**

Active IP55 ventilation for CABxx, 133 mm height, 115 VAC

**CAB-AVT-115-230**

Active ventilation for CABxx with glass door, 115-230VAC

**CAB-1GD-42W**

Cabinet glazed door 800x2000mm

**CAB-2SD-42W**

Cabinet double steel door 800x2000mm

**CAB-1SD-42W**

Cabinet steel door 800x2000mm

**CAB-CE-M**

Cable entry gland 14xM25/32

**CAB-CE-L**

Cable entry gland 2xM25/32/40, 1xM32/40/50, 2xM40/50/160

**CAB-CE-S**

Cable entry gland w/sealing membranes Ø7 to 26mm



### CAB-BASE-88

Base / plinth for 800x800mm cabinets

page 5/5

[www.zenitel.com](http://www.zenitel.com)

[info@zenitel.com](mailto:info@zenitel.com)

Last revision date: 2025-02-05 09:53

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend: Zenitel – All rights reserved.