

2810010116

CAB24F-V2

Floor cabinet 19" 24HU 600x600x1200mm fixed frame



- ✓ Front metal door
- ✓ Front door handle: CAB-DH-K
- ✓ Includes 2x side & rear steel sheet panels
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. The cabinet is DNV-GL type approved and its perfect for installing our 19" system components to create a complete system for your installation.

The cabinet comes with a front metal door that is hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if needed. Cabinet variant 24 HU, 600 wide and 600 deep. Internal 19-inch fixed frame for up to 24 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over module and terminals. It comes with 3 fixed door plates, front doors, and chassis ground.

By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.


This cabinet is suitable for:

- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN

- ✓ CCTV
- ✓ IPTV
- ✓ DECT
- ✓ Paging
- ✓ Masterclock
- ✓ UPS (small)

Technical Dimensions

CABINET TECHNICAL DATA	
MODEL:	RITTAL CUSTOM MODEL
COLOR:	RAL 7035
BASE WEIGHT:	118 kg (261 lbs)
BASE/PLINTH:	NO
VENTILATION:	NONE (DEFAULT)
FRONT DOORS:	METAL
REAR DOORS:	NONE (DEFAULT)
DOOR HANDLE:	DOOR HANDLE W/ KEY-LOCK

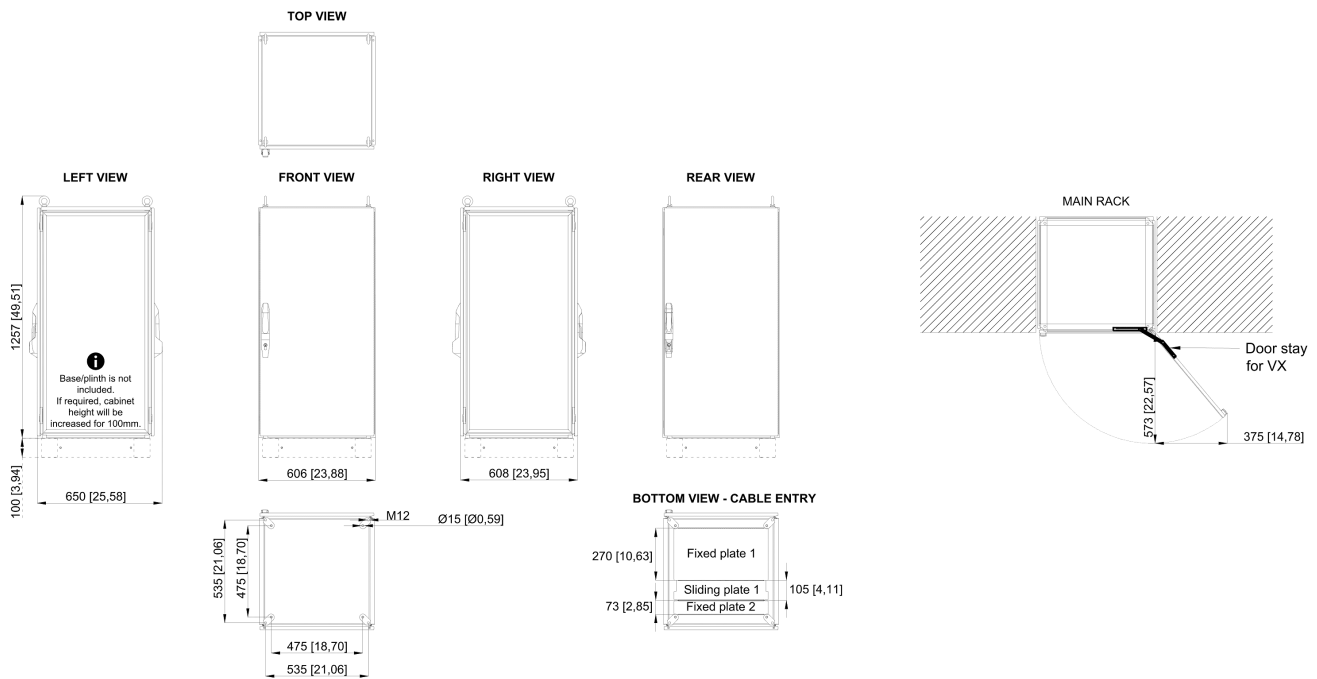

Specifications

GENERAL

Dimensions (WxHxD)	606x1257x650mm
Color	RAL 7035
Material	Steel
Ingress grade	IP-55 (or less, based on selected ventilation)
Mounting	Floor mounted
Cable inlet	Bottom (top available on request)
Environmental Condition	Protected

Accessories



CAB-DH-PP

Door handle with push-button & pad-lock for CABxx

Item Number: 2810011064



CAB-DH-P

Door handle with push-button for CABxx

Item Number: 2810011063



CAB-DH-K

Door handle with key-lock for CABxx

Item Number: 2810011062



CAB-AVIP55-115

Active IP55 ventilation for CABxx, 133 mm height, 115 VAC

Item Number: 2810011068



CAB-AVIP55-230

Active ventilation unit IP55 for CABxx, 133mm height, 230VAC

Item Number: 2810011067



CAB-AVT-115-230

Active ventilation for CABxx with glass door, 115-230VAC

Item Number: 2810011079



CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable

Item Number: 2810011059



CAB-CE-M

Cable entry gland 14xM25/32

Item Number: 2810011048



CAB-CE-L

Cable entry gland
2xM25/32/40, 1xM32/40/50,
2xM40/50/160

Item Number: 2810011049



CAB-CE-S

Cable entry gland w/sealing membranes Ø7 to 26mm

Item Number: 2810011050



CAB-BASE-66

Base / plinth for 600x600mm cabinets

Item Number: 2810011083



CAB-BASE-66

Base / plinth for 600x600mm cabinets

Item Number: 2810011089