zenitel

DATASHEET

2970000063

UPS-XPC-2500-120T

Tower Online UPS 2500W/30 min, 120V



Description

T91 UPS provides double conversion online power for light industrial applications, point of sale, servers and voice & data networks. T91 features unity output power factor to support up to 43% more critical loads than typical UPSs.

- UL, cUL, CE, RoHS, FCC B, FCC A
- T91 provides industry highest real power rating
- Extended battery packs for runtimes up to 4 hours
- Fast Recharge: up to 95% in just 3 hours
- Multiple communications capability
- Load shedding capabilities
- Emergency power off

www.zenitel.com info@zenitel.com

Last revision date: 2025-12-05 09:35


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Item 2970000063, consists of:

- 1x T91-3000 (the UPS)
- 2x T91-BP72A (Battery pack)

Technical Dimensions

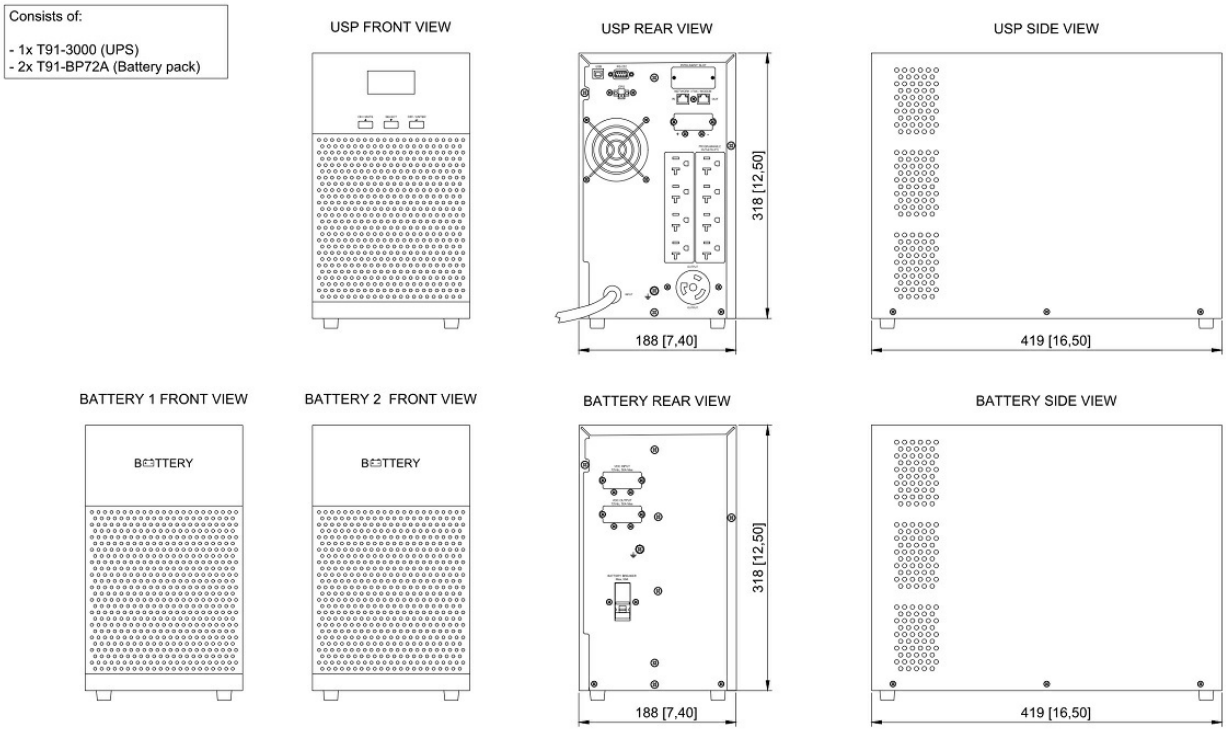

www.zenitel.com info@zenitel.com Last revision date: 2025-12-05 09:35

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Input Power rating	3000VA (2880W)
Input Voltage	55-150VAC
Input Frequency	50/60Hz auto-sensing
Output Voltage	120VAC nominal (100/110/115/127 selectable)
Frequency	50/60Hz auto-sensing ≤ 1%
Efficiency	Up to 98% ECO Mode and 92% online mode
UPS, Dimensions	7.4" x 16.5" x 12.5" (W x D x H)
UPS, Weight	66 lbs
Battery type (included)	Up to 30 minutes
Battery Dimensions	7.4" x 16.5" x 12.5" (W x D x H)
Battery, Weight	82 lbs (each)

GENERAL

Accessories

www.zenitel.com info@zenitel.com Last revision date: 2025-12-05 09:35

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



UPS-XPC-CARD

Dry Contact Interface Card

Item Number: 2970000204

www.zenitel.com info@zenitel.com Last revision date: 2025-12-05 09:35

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.