

2310102114

## SMT-1935 19 inch Monitor

19" Monitor CCTV



- ✓ 19" LCD monitor
- ✓ 4:3 aspect ratio
- ✓ Supports up to 1,280 x 1,024 resolution
- ✓ Video input : HDMI, VGA, BNC

---

### Description

The SMT-1935 19 inch Monitor features a 4:3 aspect ratio and supports up to 1280 x 1024 resolution. It is VESA DPM compatible. The monitor can be connected via HDMI, VGA, BNC video input. It is a high-quality LED HD monitor with protection glass suited perfectly for the maritime industry.

The screen delivers sharp image quality with an excellent viewing angle of 170° horizontal and 160° vertical. It supports NTSC/PAL video systems.

### SMT-1935 19 inch Monitor


The 19 inch display is specifically designed for professional CCTV use where precision and reliability are key prerequisites for the industry. As a result, it possesses a high dynamic contrast ratio of 1000:1 and a fast response time of 5ms.

The SMT-1935 19 inch Monitor is intended to provide the industry with a high-performance durable display solution that they can trust.

# Technical Dimensions

Dimensions

Unit : mm (inch)

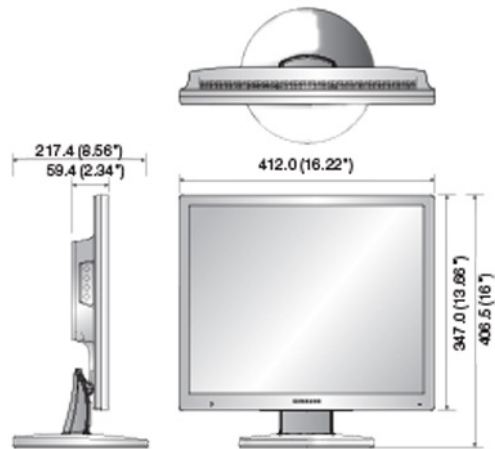

# Specifications

## DISPLAY

|                     |               |
|---------------------|---------------|
| Type                | LED           |
| Screen Size         | 19"           |
| Max. Resolution     | 1280 x 1024   |
| Brightness          | 250cd/m2      |
| Contrast Ratio      | 1,000 : 1     |
| Aspect Ratio        | 4:3           |
| Viewing Angle (H/V) | 170° / 160    |
| Display Color       | 16.7million   |
| Response Time       | 5ms           |
| Video System        | NTSC / PAL    |
| Panel Life          | 30,000 hours  |
| Filter Type         | 3D combfilter |

## INTERFACE

|                    |                  |   |
|--------------------|------------------|---|
| Video              | Connector        | BNC type (2 in / 2 out)                 |
|                    | Connector        | 1 Analog RGB 15-pin D-sub               |
|                    | Input Signal     | 0.7Vpp ±5%                              |
| VGA                | Available Format | 720 x 400@70Hz                          |
|                    |                  | 640 x 480@60Hz/72Hz/75Hz (VGA)          |
|                    |                  | 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)    |
|                    |                  | 1,024 x 768@60Hz/70Hz/75Hz (XGA)        |
|                    |                  | 1,152 x 864@75Hz                        |
|                    |                  | 1,280 x 720@60Hz                        |
|                    |                  | 1,280 x 960@60Hz                        |
|                    |                  | 1,280 x 1,024@60Hz/75Hz (SXGA)          |
|                    |                  | 1,280 x 1,024@60Hz/75Hz (SXGA)          |
| HDMI               | Connector        | 1 HDMI input (Type A connector)         |
|                    | Available Format | 640 x 480p@60Hz, 720 x 480i@60Hz        |
|                    |                  | 720 x 480p@60Hz, 720 x 576i@50Hz        |
|                    |                  | 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz |
| Audio              | Connector        | 2 RCA type (2 stereo inputs)            |
|                    | Output Signal    | Speakers : 2 x 1W                       |
| Additional Support |                  | Remote Control                          |

## ON SCREEN DISPLAY

|           |  |
|-----------|--|
| Functions | VESATM DPM compatible  |
| Language  | English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Thai, Chinese, Japanese, Korean, Dutch, Danish, Arabic |

## GENERAL

|               |                                  |                            |
|---------------|----------------------------------|----------------------------|
| Electrical    | Input Voltage                    | 100 ~ 240V AC (50/60Hz)    |
|               | Power Consumption                | Max. 22W                   |
| Environmental | Operating Temperature            | 0 ~ +40°C (+32°F ~ +104°F) |
|               | Operating Humidity               | 20% ~ 90% (Non-condensing) |
| Mechanical    | Dimensions with Stand (WxHxD)    | 412.0 x 406.5 x 217.4mm    |
|               | Dimensions without Stand (WxHxD) | 412.0 x 347.0 x 59.4mm     |
|               | Weight                           | 4.78Kg                     |
|               | Protection Glass                 | Yes                        |
|               | Cabinet Color                    | Black                      |
|               | Wall Mounts                      | Optional                   |
|               | VESA Mounts Interface            | 100 x 100mm                |

## Accessories



## EP-180

Ceiling mounting bracket

Item Number: 2310102037