

2200001003

## FXS-GW-24P

24 port FXS gateway

- ✓ SIP interface to ICX-Alphacom
- ✓ TLS and SRTP security encryption
- ✓ Failover SIP server



## Description


The Zenitel FXS-GW-24P FXS gateway enables installations of all sizes to create a cost-effective hybrid IP and analog telephone system that offers the benefits of VoIP communications and takes advantage of Gigabit speeds.

The Zenitel FXS-GW-24P includes 24 FXS ports, a Gigabit network port and full integration with the ICX-Alphacom communication system.


## Technical Dimensions

page 1/4

### REAR VIEW




### TOP VIEW

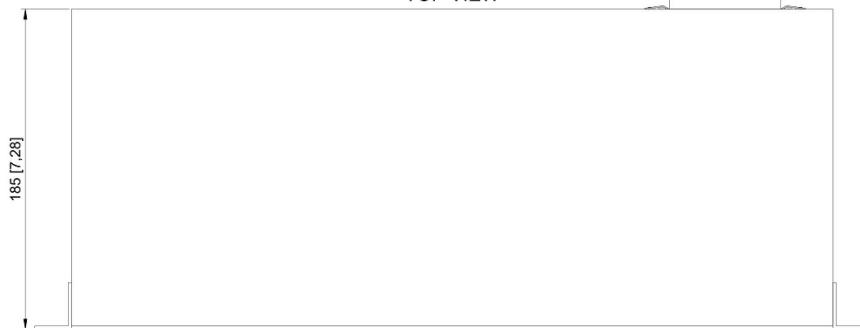

### FRONT VIEW



### SIDE VIEW



# Specifications

## GENERAL

Dimension	440mm(L) x 185mm(W) x 44mm(H) (1U)
Weight	2.63kg
Mounting	Desktop and rack mount with front brackets
LED Indicators	Power, LAN Link/Activity, Hard Drive Activity, Connection per port
Telephone Interfaces	24 x RJ11 & 1 x 50-pin Telco connectors
Network Interfaces	1 x 10M/100M/1000Mbps auto-sensing RJ45 port
LCD display	Backlit 128x32 graphic LCD display
Voice-over-Packet Capabilities	Window based carrier grade line echo cancellation, dynamic jitter buffer
QoS	DiffServ, TOS, 802.1P/Q VLAN tagging
Security	SRTP, TLS/SIPS, HTTPS, 802.1x
Management	Syslog, HTTPS, Web browser, voice prompt, TR-06
Power Supply	Output: 12VDC, 5A; Input: 100 ~ 240VAC, 50 ~ 60Hz
Operating temperature	-15 °C - 55 °C
Max cable length to telephone	1800 m

page 3/4

## Used With



### ICX-500

Intelligent Communication  
Gateway with HD Voice

page 4/4