

2200001003

FXS-GW-24P

24 port FXS gateway

- ✓ SIP interface to ICX-AlphaCom
- ✓ TLS and SRTP security encryption
- ✓ Failover SIP server







ICX ICX-AlphaCom

Description

The Zenitel FXS-GW-24P FXS gateway enables installations of all sizes to create a cost-effective hybrid IP and analog telephone system that offers the benefits of VoIP communications and takes advantage of Gigabit speeds.

The Zenitel FXS-GW-24P includes 24 FXS ports, a Gigabit network port and full integration with the ICX-AlphaCom communication system.

Technical Dimensions

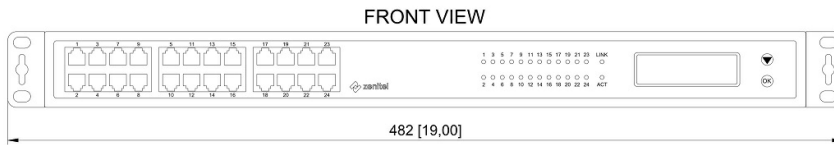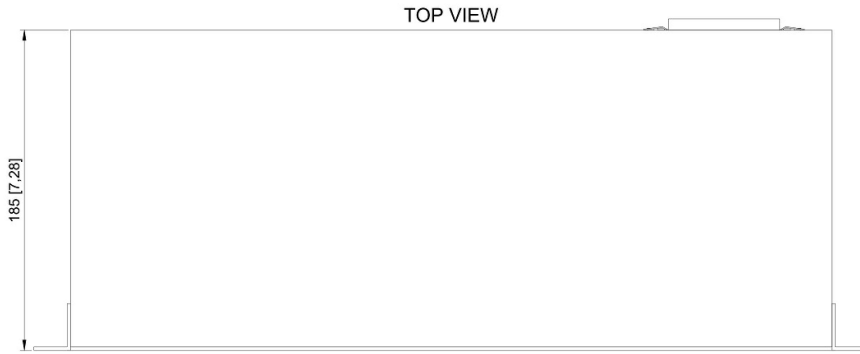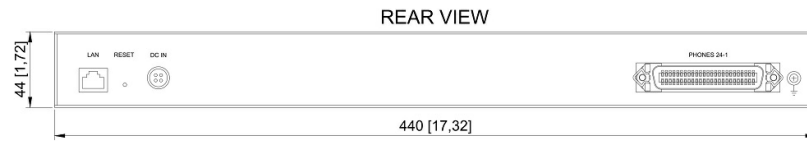

Specifications

GENERAL

| | |
|--------------------------------|--------------------------------------------------------------------------|
| Dimension (WxDxH) | 440 x 185 x 44mm (1U) |
| Weight | 2.63kg |
| Mounting | Desktop and rack mount with front brackets |
| LED Indicators | Power, LAN Link/Activity, Hard Drive Activity, Connection per port |
| Telephone Interfaces | 24 x RJ11 & 1 x 50-pin Telco connectors |
| Network Interfaces | 1 x 10M/100M/1000Mbps auto-sensing RJ45 port |
| LCD display | Backlit 128x32 graphic LCD display |
| Voice-over-Packet Capabilities | Window based carrier grade line echo cancellation, dynamic jitter buffer |
| QoS | DiffServ, TOS, 802.1P/Q VLAN tagging |
| Security | SRTP, TLS/SIPS, HTTPS, 802.1x |
| Management | Syslog, HTTPS, Web browser, voice prompt, TR-06 |
| Power Supply | Output: 12VDC, 5A; Input: 100 ~ 240VAC, 50 ~ 60Hz |
| Operating temperature | -15 °C - 55 °C |
| Max cable length to telephone | 1800 m |

Used With



ICX-500

Intelligent Communication
Gateway with HD Voice

Item Number: 1002000100