



1002000110

# ICX-510-IA Intelligent Communication Gateway

ICX-510 incl ICX-AlphaCom Core

- Made to provide critical communication in any environment
- Supports 552 IP stations
- Environmentally friendly and energy saving max. 15 W
- Global networking and integration
- O Dual software images for system robustness and low downtime during software upgrades
- Secure boot, hardware Root of Trust RoT
- High quality professional PA broadcasting and messaging services
- Security voice guidance for public safety and building security
- 1U high, fanless design, vibration proof







### Description

The ICX-510-IA Intelligent Communication Gateway connects people, devices, and systems at unprecedented levels of manageability, scalability, robustness, and interoperability.

ICX-510-IA will provide your site with all your communication needs as it is easy to extend in functionality and system size, and is designed to be future-proof. The system can be tailored to support applications of almost unlimited specificity and complexity.

Zenitel's ICX (Intelligent Communications X) implies the deployment of VoIP applications required in critical situations. ICX-510-IA provides carrier-class system availability and protects resources in an IP environment by using embedded security mechanisms.


The main security mechanisms used are hardware Root of Trust, software integrity check (SHA256), restricted management access, separate management interface, and internal firewall.


For more information on ICX-510-IA please see Zenitel Wiki

#### **Technical Dimensions**

certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is

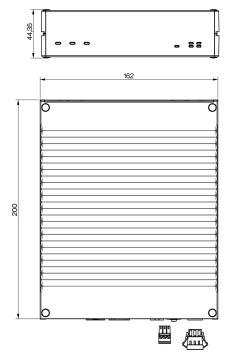



all dimensions in mm

page 2/6

## **Specifications**

#### **MECHANICAL & ENVIRONMENTAL**

Dimensions (WxHxD)	162 x 44.5 x 200 mm / 6.38 x 1.75 x 7.87 inches	
Weight	1 kg / 2.2 lbs	
Power	Nominal 24VDC - 48VDC, 15 W (min/max: 20VDC-63VDC)	
Mounting	Wallmount or 19" rack	
Processor subsystem	NXP LS1043	
Storage subsystem	Solid state (4048 MB Flash). MicroSD, USB	
Temperature Range	-15°C to +55°C / 5°F to 131°F	
Relative Humidity	95%	

#### **FEATURES**

Memory	4048 MB SDRAM, 4048 MB NAND Flash, 128 MB NOR Flash
Subscriber Capacity	552 intercom stations per server
Busy Hour Call	60 000 BHCA
Network ports	High speed, up to 1 gigabit per second
Software Integrity Check	SHA256
IP Priority	DiffServ, IP TOS
IP Security	Hardware root of trust, SSH, HTTPS, firewall
SIP	RFC 3261, SIP INFO, RE-Invite. RFC 2833, RFC 4733,
VoIP Internal Networking	64 channels
VoIP External Networking	64 channels
ISDN Trunk	ISDN PRI (30 channels); VoIP external networking + gateway
Analog Trunk	FXO (4 & 8 channels); VoIP external networking + gateway
GSM Trunk	Quad band GSM; VoIP external networking + gateway
Other	Vingtor-Stentofon Data scripting engine (EDIO)
VoIP Audio	HD Audio - 16 kHz (background music, see additional information on the Zenitel wiki), HD Voice - G.722 (7 KHz), Telephone Audio - G.711 (3.4 KHz)
Configuration	AlphaPro over IP, Web
Monitoring and Logging	SNMP trap, SNMP MIB, syslog, Web, e-mail, SqLite
SW Upgrade	System recovery upgrade via SD- card, Web, Automatic upgrade of IP station

page 3/6

www.zenitel.com info@zenitel.com

Last revision date: 2025-10-15 10:30

Open Duplex Conference	20 open duplex conferences can be configured. A maximum of 32 subscribers can participate in 1 conference or spread over multiple conference channels simultaneously.	
Push-to-Talk Conference	50 conference channels. Unlimited number of participants. Priority features	
Group Call	250 groups. Unlimited number of participants. Priority features	
Call Modes	Open mode. Ringing mode. Call request mode. Priority features	
Audio Messaging	PA broadcasting. Auto-attendant, Voice guidance (doors, elevators), Security voice response	
Compliance	CE, FCC Part 15	
Certifications	IEC/UL62368-1, EN61000-6-X, EN60945, EN 50121-4; In order to comply with UL safety requirements, the unit has to be supplied by a power supply specified as a Limited Power Source (LPS) or PS2 (cased on IEC/UL 62368-1 definition) or NEC Class 2 source of supply	

#### **CERTIFICATIONS**

EMC	IEC/EN 61000-6-2 Industrial Immunity
	IEC/EN 61000-6-4 Industrial Emissions
	IEC/EN 61000-6-1 Light Industrial Immunity
	IEC/EN 61000-6-3 Light Industrial Emission
	EN 55032 class B Multimedia equipment
Maritime	IEC/EN 60533 Maritime
	IEC/EN 60945
Vibration	2Hz-100Hz (IEC/EN 60068-2-6)
Dry heat	55°C (131°F) (IEC/EN 60068-2-2)
Low Temperature	-15°C (5°F) (IEC/EN 60068-2-2)
Damp Heat, Cyclic	40°C (104°F) / 93%RH (IEC/EN 60068-2-2)
Safety	UL62368-1 certification
	CB certification to IEC62368-1


## Accessories

page 4/6



IA-MB1

Mounting Bracket for ICX-500/510



IA-RS1

Rack Shelf for ICX-500/510 - 19"



IPS-AC1

PSU for ICX-500/510



PROMAX-120-24

Power supply 100-240VAC/24VDC 5A



Power Supply 100-240VAC/48VDC

2A

## **Used With**



ILS-IC, IP Station License

IP Station License



ILS-SIP, SIP Station License

SIP Station License



ILS-SC, IP-Station License,

Softclient

IP Station License for SoftClient



ILI-AN2 / ILI-AN8, AlphaNet License (2 Lines and 8 Lines)

AlphaNet License



ILI-SIP2 / ILI-SIP4 / ILI-SIP8, SIP Trunking License 2, 4, 8 Lines

SIP Trunking License



ILI-API64 / ILI-API512, API License (64 and 512 Stations)

API License



ILI-REC(2-32), Active Recording Interface License

Active Recording Interface License



ILF-M-BAS / ILF-M-ENH / ILF-M-EXT ( Audio Messaging Licenses, Basic and Enhanced)

Audio Messaging Licenses



#### ILS-CRM

IP Station License for CRM

page 6/6