

2131000105

# BPF-660TF


Ceiling loudspeaker 6W 70/100V w/fuse

- √ 70V / 100V line
- ✓ Tapping: 0,5W 1,5W 3W 6W

## Description

Our new improved mounting system makes this the most flexible 6" ceiling speaker DNH A/S has made. The hooks are changeable to set upside down, allowing up to 55 mm on the ceiling thickness. The easy mounted dust box has a M20 gland and a M20 blanking plug on the side as standard.

### **Technical Dimensions**

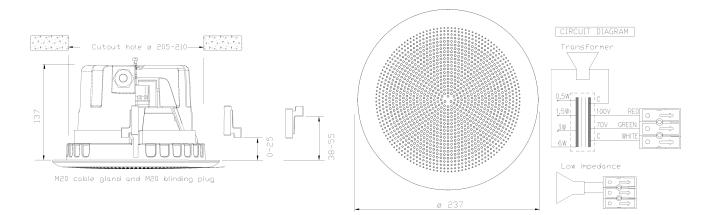

page 2/3

# **Specifications**

#### **GENERAL**

| Environmental<br>Condition       | Protected                   |
|----------------------------------|-----------------------------|
| Size                             | (Diam x D): 237 x 137<br>mm |
| Dispersion (-6dB) 1kHz<br>/ 4kHz | 155° / 125° (baffle)        |
| Effective freq. Range            | 170 – 20000 Hz              |
| SPL Rated Power                  | 100 db                      |
| SPL 1W/1m                        | 93 db                       |
| Rated power                      | 6W                          |
| Max./min.amb.temp                | 90°C / -20°C                |
| Weight                           | 1,3 kg                      |
| Termination                      | Spring clamp                |
| Mounting                         | Hooks                       |
| Material/Colour                  | PA-6 V0/ ABS /<br>RAL9010   |
|                                  |                             |