

1022100200

HSB-4

Analog FXS telephone, weatherproof

AVAILABLE FROM END OF Q2 2024

- Multi-purpose analog telephone
- Weather and corrosion resistant (IP66)
- Delivered for bulkhead mounting
- Socket with dust-cap for connection of headset or microphone
- Option for connection of handset or headset
- DTMF dialing
- Potential free alarm contact for external alarm system, max 50mA
- External relay units as IRR-3 and CRB-7A can be used for activating of extra alarm units.

IP66

Description

The HSB-4 is a weather-proof analog telephone is well suited for installation in harsh environments and with headset operation it can also be used efficiently in any noisy areas. It is intended for bulkhead mounting and it can also installed in a PLM cabinet for additional protection of the telephone and connected accessories.


Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2025-07-03 10:19

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


SIDE VIEW

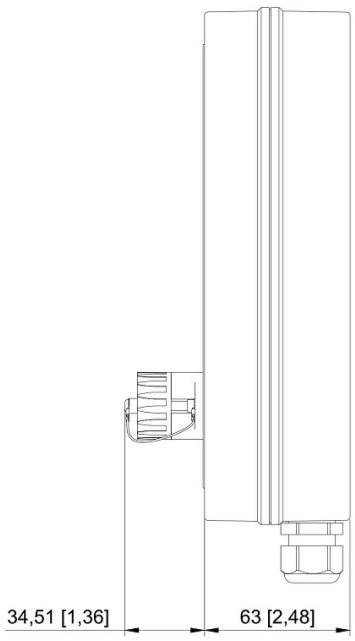

FRONT VIEW



REAR VIEW

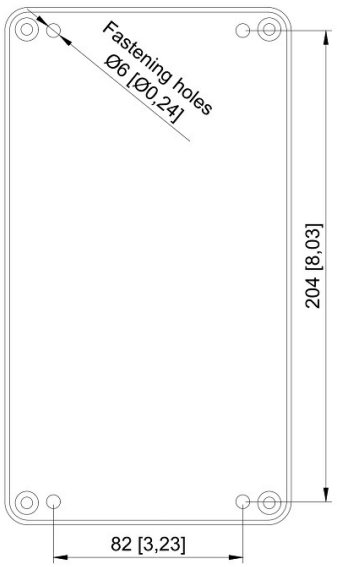

www.zenitel.com info@zenitel.com Last revision date: 2025-07-03 10:19

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Ringing voltage:	45-110 V, 25-50 Hz
Dimensions (MM)	124W x 224H x 63D
Temp. range	-20 C / +50 C
Connections	Screw terminals
Cable Inlet	2x PG-13.5
Colour	Grey with black front
IP rating	IP-66
Enclosure material	ABS/PC
Call indication	Blinking LED (recommended to use in combination with tone caller such as HB-105)

Accessories



P-MT7-A

Headset with boom mic, headband, and 10m cable

Item Number: 1020600776



HAS-3

Handset for HSB-03 W/C16 plug

Item Number: 3005000022



HAS-3WT

Handset for HSB-03 W/C16 plug. Weather proof

Item Number: 3005000023



CRB-7

Relaybox for Signal Units Waterproof

Item Number: 3006102026

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



HB-105-2

Telephone Tonecaller, 60-100V AC,
105 dBa, watertight, IP66

Item Number: 2340200021

Used With

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.