

1022100200

HSB-4

Analog FXS telephone, weatherproof

AVAILABLE FROM END OF Q2 2024



- ✓ Multi-purpose analog telephone
- ✓ Weather and corrosion resistant (IP66)
- ✓ Delivered for bulkhead mounting
- ✓ Socket with dust-cap for connection of headset or microphone
- ✓ Option for connection of handset or headset
- ✓ DTMF dialing
- ✓ Potential free alarm contact for external alarm system, max 50mA
- ✓ External relay units as IRR-3 and CRB-7A can be used for activating of extra alarm units.


 IP66

Description

The HSB-4 is a weather-proof analog telephone is well suited for installation in harsh environments and with headset operation it can also be used efficiently in any noisy areas. It is intended for bulkhead mounting and it can also be installed in a PLM cabinet for additional protection of the telephone and connected accessories.

Technical Dimensions


SIDE VIEW

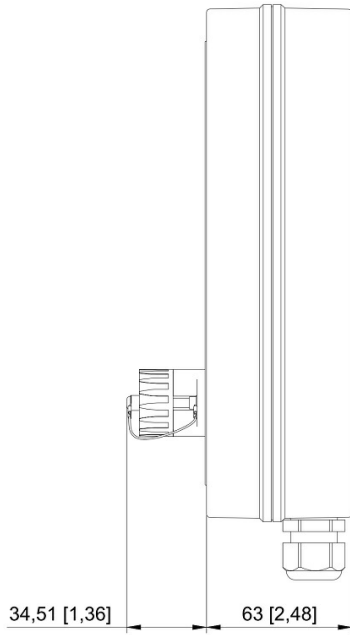

FRONT VIEW



REAR VIEW

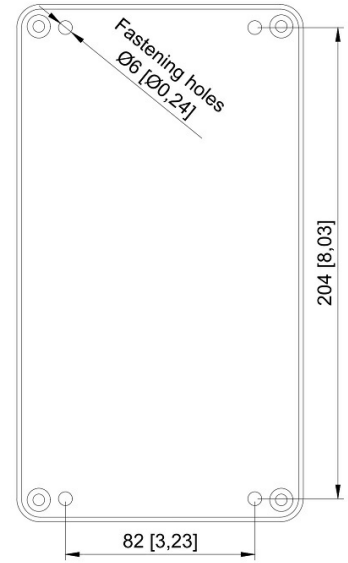

Specifications

GENERAL

Ringing voltage:	45-110 V, 25-50 Hz
Dimensions (MM)	124W x 224H x 63D
Temp. range	-20 C / +50 C
Connections	Screw terminals
Cable Inlet	2x PG-13.5
Colour	Grey with black front
IP rating	IP-66
Enclosure material	ABS/PC
Call indication	Blinking LED (recommended to use in combination with tone caller such as HB-105)

Accessories



P-MT7-A

Headset with boom mic, headband, and 10m cable

Item Number: 1020600776



HAS-3

Handset for HSB-03 W/C16 plug

Item Number: 3005000022



HAS-3WT

Handset for HSB-03 W/C16 plug. Weather proof

Item Number: 3005000023



CRB-7

Relaybox for Signal Units Waterproof

Item Number: 3006102026



HB-105-2

Telephone Tonecaller, 60-100V AC, 105 dBa, watertight, IP66

Item Number: 2340200021

