zenitel

DATASHEET

1022100100

VAF-2

FXS Station for console mount



- Bridge and ECR console telephone
- Supports DTMF
- Internal Potential Free Relay
- Adjustable Backlight.
- Built-in Buzzer and Blinking LED
- Dual Ringing Tone Selection
- Volume Adjustment Buttons
- Full Numeric Keyboard with Flash/R-Button
- Additional 24VDC Power Supply

Description

Introducing the VAF-2 Console Mount FXS Station, the reliable choice for marine communication needs. Built upon the proven stability of its predecessor, the VAF-2 offers enhanced functionality and durability, making it the preferred solution for cost-effective and user-friendly analog station lines.

VAF-2 Console Mount FXS Station

Experience reliable, cost-effective, and user-friendly marine communication solutions. Trusted by many for its proven stability and ease of use, the VAF-2 delivers enhanced functionality and durability for all your communication needs.

Key Features:

1. Internal Potential Free Relay: Easily activate external beacons or sounders for improved alerting and emergency

www.zenitel.com info@zenitel.com

Last revision date: 2024-12-06 16:43

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

response.

2. Adjustable Backlight: Ensure optimal visibility with customizable backlight settings for the keyboard, enhancing usability in any lighting condition.

3. Built-in Buzzer and Blinking LED: Stay informed of incoming calls with integrated alerts, improving communication efficiency.

4. Dual Ringing Tone Selection: Choose from a selection of ringing tones for easy differentiation in areas with multiple telephones.

5. Volume Adjustment Buttons: Fine-tune handset volume for clear communication tailored to individual preferences.

6. Full Numeric Keyboard with Flash/R-Button: Enjoy comprehensive functionality with a complete keypad, including # and * keys, and a Flash/R-button for recall with adjustable flash time.

7. Additional 24VDC Power Supply: Ensure reliable operation and increased sound pressure with an additional power supply for backlighting.

Compatibility:


- Primarily Compatible with Grandstream FXS 4224 and 4248: Seamlessly integrate with leading FXS systems for enhanced functionality and interoperability.
- Backwards Compatible: Enjoy flexibility and ease of integration with compatibility across ATLB and ICS FXS boards.
- Analog Interface Compatibility: Compatible with analog interfaces to VSAT for seamless connectivity.

Technical Dimensions


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


FRONT VIEW

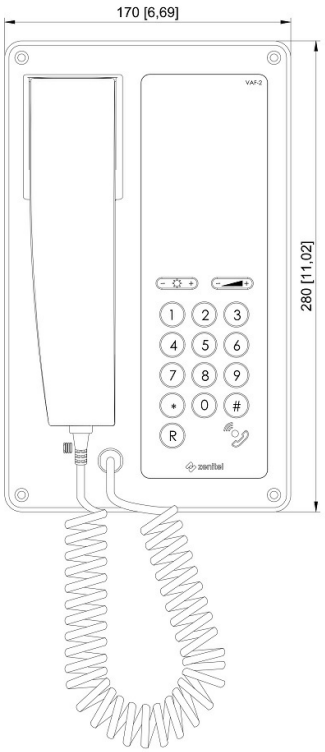


SIDE VIEW



REAR VIEW

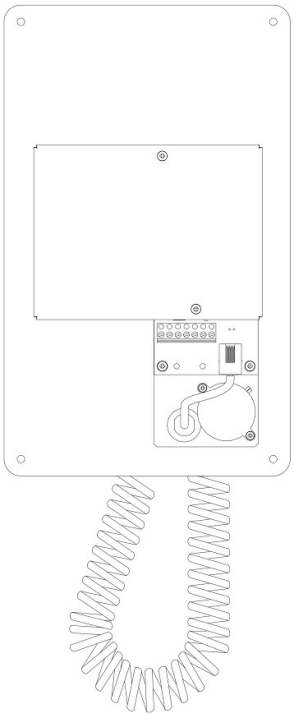

CUT OUT VIEW

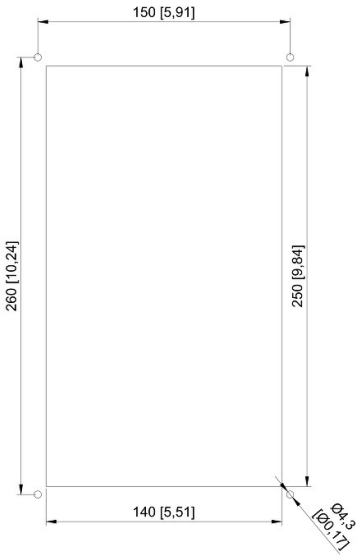

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


Specifications

GENERAL	
Dimension (HxWxD)	170 x 280 x 84 mm
Weight	0.6 kg
Construction	Aluminum frame
Environment	IP-22
Connectors	Screw terminals
Ringing voltage	45-110 V, 25-50 Hz
Outputs	1 relay contact output (activated during received call tone)
Power	24V DC for background light
Buzzer tone	Piezo acoustic sound ringer
Flash (R) key	Flash time selectable by jumper, default 100 ms
Keypad	Standard dial pad 0-9 (*) , (#) and R Flash key

Used With

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



ICX-LCM-FXS

Wiring kit for FXS-GW-24 gateway

Item Number: 1172200021

www.zenitel.com info@zenitel.com Last revision date: 2024-12-06 16:43

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.