

2340110047

## SPA-M1-V2-MED

PA Panel Single, All-Call, Flush, Green Backlight



MED Certification



Onboard communication

## Description

- ✓ PA Panel for single system, all call
- ✓ Built-in pre-amplifier with preset signal level and tone controls
- ✓ TALK button on panel
- ✓ Flush mounting, back box for wall mounting is available
- ✓ Local mute contact for external loudspeaker
- ✓ Buttons backlight with green illumination

This panel gives All Call Message in a SPA-V2 public address and general alarm single system. Installation in consoles or wall indoor.


Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. This function

page 1/4

must be in combination with relay box.

Note: Microphone must be ordered separately.

## Technical Dimensions

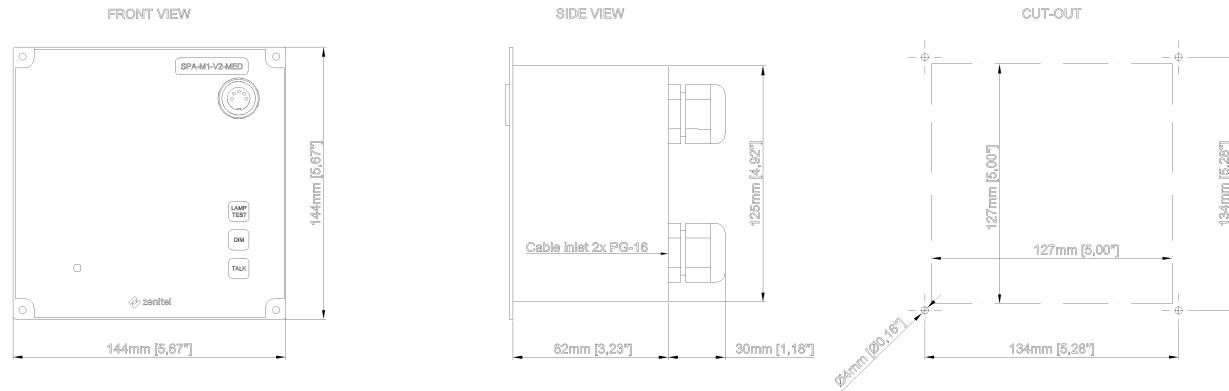


# Specifications

## GENERAL

|                                |  |
|--------------------------------|--|
| Size (WxHxD)                   | 144 x 144 x 82   |
| Weight w/microphone            | 0. 5 kg  |
| Material                       | Black anodized aluminium                               |
| Mounting                       | Flush, wall with use of back box                       |
| Output signal                  | 0.775Vrms / 0dB  |
| Connections                    | Plugable screw terminals for 2.5 mm <sup>2</sup> cable |
| Cable glands                   | 2 x PG-16  |
| Cable size                     | 6 x 2 x 0.75mm <sup>2</sup>                            |
| Local mute relay, output       | 24V DC @ maximum 50 mA                                 |
| IP-rating                      | IP-44  |
| EN60945 environmental category | Protected  |
| Compass safe distance          | 0.75 m   |
| Operator & reading distance    | 0.7m   |

## Accessories

page 3/4



### SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels

### MB-30G

Gooseneck Microphone

### PAM2H

Handheld Microphone for SPA-V2 indoor panels.