



### 4000019752

# ITCS-C5

# Bathroom Calling Unit

- Unit for call and call reset in bathrooms
- Pull-cord activation with push-button reset
- Red indicator light for call status
- Bulkhead mounting

# Description

The ITCS-C5 is a call and reset unit, primarily used in bathrooms and toilets to enable users to request assistance easily. The unit features a pull-cord activation for calling and a push-button reset, ensuring simple and intuitive operation.

- Easy call activation Pull the cord in the direction of the arrow to trigger a call.
- Visual confirmation A red bulb indicator lights up when a call is active.
- Simple reset function Calls can be reset by pressing the built-in push button.
- Bulkhead mounting Designed for secure and convenient installation.


Ideal for onboard and facility communication systems, the ITCS-C5 enhances safety and accessibility in bathroom areas.

page 1/4

certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

# **Technical Dimensions**

# **OUTLINES:**

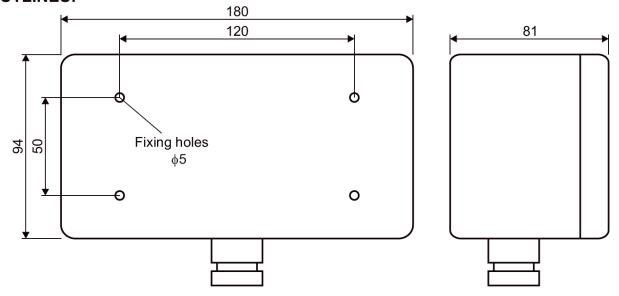

# **Specifications**


#### **MECHANICAL**

Dimensions (WxHxD)	180x94x81 mm
Weight	0.5 kg
Cable inlet (gland)	1 x PG 13.5
Protection	IP 44

#### **ENVIRONMENTAL**

Protection	IP44
Temperature	-25°C to +70°C

## **CONNECTION:**




# **CURRENT CONSUMPTION:**

0.013A / 24V DC

### NOTE:

If more calling units type ITCS-C4, C5 or C6 is used for same calling place/line, terminals 1,2,3 are connected in parallel and terminals 4,5 in series. Put link *M* on last unit in chain.



# **Used With**









### ITCS-1A-24VDC

Single Call Control Unit for Inelteh Call System (24VDC)

### ITCS-2A-24VDC

Dual Call Control Unit for Inelteh Call System (24VDC)

### ITCS-2A-230VAC

Dual Call Control Unit for Inelteh Call System (230VAC)

### ITCS-2A-24VDC

Dual Call Control Unit for Inelteh Call System (24VDC)



#### ITCS-1A-10

ITCS Control Unit for 10 positions